



# SCI0110T

## 1 Channel, 10 Amp Inductive Source Controller

### Key Features

- 1 x 10 Amp programmable inductive source controller module
- 128 scene memory
- Suitable for 10 Amp single phase supply
- Fail to full safety feature
- iCAN network inputs
- Audio Visual Port (RS485)
- Panic/fire alarm input
- Configuration stored in Non Volatile EEPROM
- Firmware storage in reflashable FLASH memory over iCAN network
- CE compliant to all relevant standards
- Designed and manufactured to ISO9001:2008 standards

### Overview

This 1 x 10 amp source controller is designed to provide scene set dimming of lighting. It is suitable for resistive and inductive loads.

In addition to the iLight iCAN network connectivity, it also has an audio visual port and a panic/fire alarm input. It can be used on its own in single channel applications, or as part of a comprehensive network in large building complexes.



## Mechanical

Weight: 2.5kg

Mains Cable Access:

2 x 25.5mm and 2 x PG16 knockouts

Control Cable Access:

1 x 25.5mm and 1 x PG16 knockout

Climate Range:

Temperature: +2°C to +40°C

Humidity: +5 to 95% non condensing

Control Inputs:

Two sets of terminals for the iCANnet™ network


Suitable for Belden 1502

One RJ12 socket for programming the iCANnet™ network

One set of terminals for the Audio Visual Port, RS485

One set of terminals for the panic/fire alarm input

## Dimensions

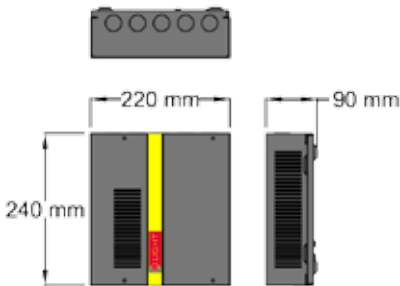

## Electrical

Maximum Load: 10 Amp single phase @ 40°C

Maximum Channel Current: 10 Amp

Supply: 230 volts +/- 10% 50/60 Hz (optionally, 127 volt 60 Hz)

Protection: Requires external circuit breaker

Load Types:

Incandescent 230 volt lamps

Low voltage inductive lamps (wire wound or electronic)

Cold cathode (Check the iLight™ help desk for details)

Minimum Load: 20 watts

Terminal Sizes:

Incoming supply, max' cable size: 4mm<sup>2</sup>

Loads, max' cable size: 1 x 4mm<sup>2</sup> or 2 x 2.5mm<sup>2</sup> per circuit

iCANnet™ network cable size: 5 x 1mm<sup>2</sup>

Audio Visual Port: RS485 2 x 1mm<sup>2</sup>

Panic/fire alarm input: 2 x 1mm<sup>2</sup>

Memory:

FLASH memory to be able to upgrade software


EEPROM for 128 scene memory

Fade Times: 0.1 seconds to 60 minutes

Mains Stabilisation: 50:1

Other Inductive Source Controllers: SCI0405, SCI0410, SCI0420, SCI1205, SCI1210, SCI1220 and the SCMI0402

## Typical Schematic

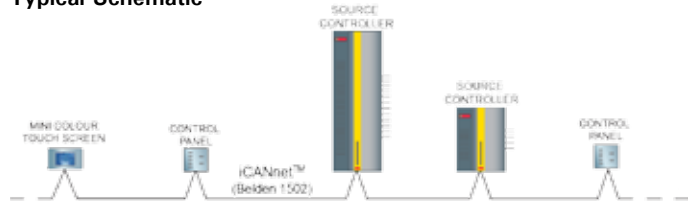

## Contact your local Eaton office

DISTRIBUIDOR EM PORTUGAL



R. Sá de Figueiredo 6 - C  
2790-233 Carnaxide

Telef. (+351) 21 417 76 21 ♦ Fax. (+351) 21 030 00 31  
Web: [www.sislite.pt](http://www.sislite.pt) - email: [geral@sislite.pt](mailto:geral@sislite.pt)



Powering Business Worldwide

© 2016 Eaton  
All Rights Reserved

Document No: SCI0110T Rev6 1115

## Eaton Industries Manufacturing GmbH

Electrical Sector EMEA  
Route de la Longeraie  
71110 Morges, Switzerland  
Eaton.eu

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

