



Ineo

Ineo Control Panel Range

Key Features


- Available in Black, White & Ivory finishes
- Standard or custom engraving on buttons
- Configuration stored in Non Volatile EEPROM
- Firmware storage in reflashable FLASH memory over iCAN network
- Configurable start up mode
- Designed and manufactured to ISO9001:2008 standards

Overview

Ineo is a versatile range of specification grade control panels that set new standards in intuitive layout and operation. Users are quickly drawn to the large on/off button controls with associated up/down adjustments. Panels may be ordered engraved in up to 10 button configurations. There is even a choice of button size and colour.

Ineo control panels can be ganged together to meet specific project needs. Individual buttons have backlight indicator lights and strong tactile feedback.

Ineo is the clean, elegant, and simple way to control lighting on your project.

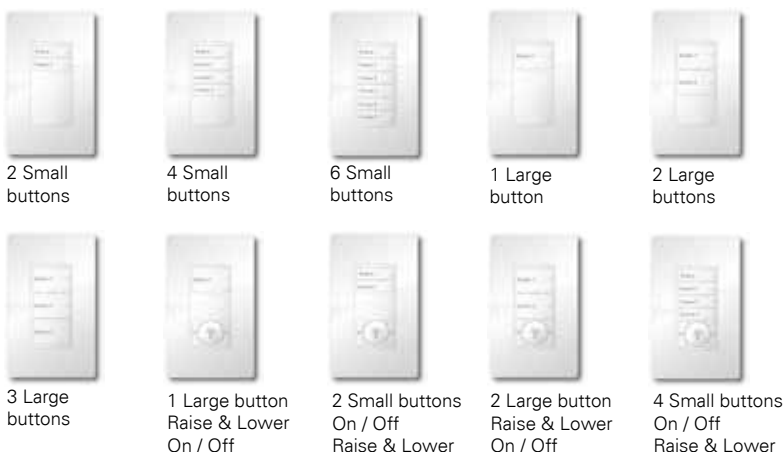

Powering Business Worldwide

Button Functions

- Scene selection
- Scene raise/lower
- Channel raise/lower
- Toggle on/off
- Toggle raise/lower
- True off
- Open/close (for curtains or blinds)
- Raise/lower (for motorized screens)
- Task (start/stop a sequence)

Infra Red Receiver - When fitted takes place of bottom button

Mechanical Data

- Buttons include scene, raise, lower, on, off functionality.
- Choice of large or small button caps
- Standard or custom engraving on buttons
- Tap on/off feature to override fade time
- All plastic construction with a separate snap-on surround
- Requires NEMA (US Style) backbox 3”h x 2”w x 2.5”d


Electrical Data

- 10 panel variants selectable via Source Controller
- Each button individually configurable via iCANsoft
- Variable fade times programmable from 0.1seconds to 60 minutes per button
- Built-in infrared receiver with learnable remote codes.
- 12Vdc powered direct from iCANnet™ network
- Tested to withstand 12kV electro-static discharge without damage or memory loss.
- Flash memory for future proof upgradeability


Environmental Data

- Temperature Range: 0°C to +40°C
- Humidity: 0% - 95% non condensing


Dimensions

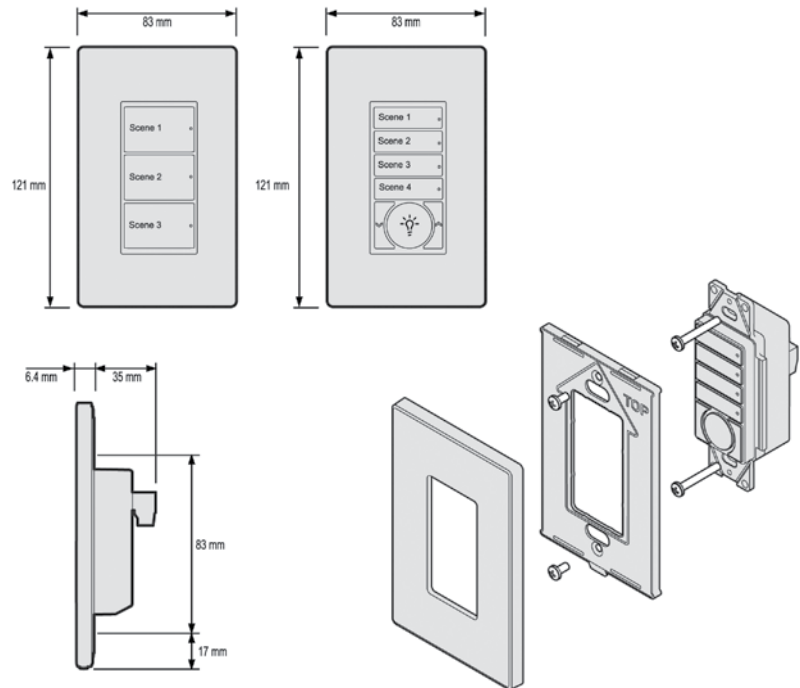

Ordering Codes

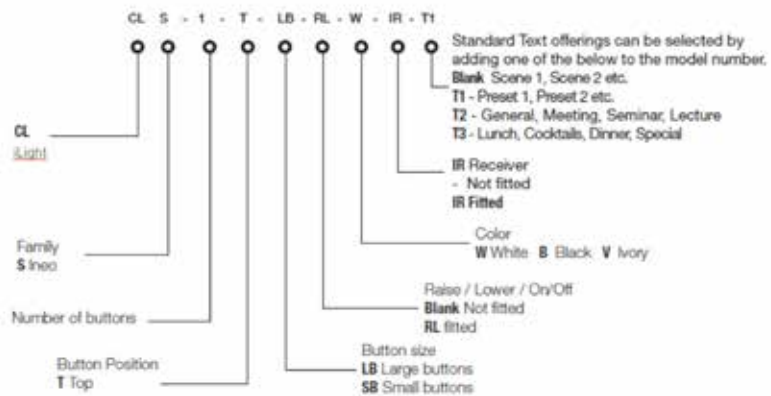

Typical Schematic

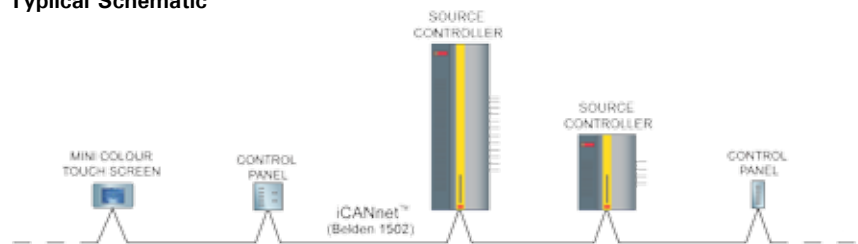

Contact your local Eaton office

20 Greenhill Crescent, Watford Business Park,
Watford, Herts, WD18 8JA. UK
T: +44 (0)1923 495496 F: +44 (0)1923 228796
E: enquiries@iLight.co.uk www.iLight.co.uk

DISTRIBUIDOR EM PORTUGAL



R. Sá de Figueiredo 6 - C
2790-233 Carnaxide
Telef. (+351) 21 417 76 21 ♦ Fax. (+351) 21 030 00 31
Web: www.sislite.pt - email: geral.sislite@sislite.pt

Eaton Industries Manufacturing GmbH
Electrical Sector EMEA
Route de la Longeraie
71110 Morges, Switzerland
Eaton.eu

© 2016 Eaton
All Rights Reserved

Document No: INEO Rev8 1115

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.



Powering Business Worldwide

