



Revio

Revio Control Panel Range

Key Features

- Labeling, colour, style, language and logos completely customisable
- Printed inserts easily produced to your requirements
- Configuration stored in Non Volatile EEPROM
- Firmware storage in reflashable FLASH memory over iCAN network
- Configurable start up mode
- Designed and manufactured to ISO9001:2008 standards

Overview

Revio is a premier range of lighting control panels that combines a simple user interface with superb design, and broad configurability.

Lighting level control is combined with a simple on/off action in one ergonomically simple rotary button control. Separate scene or channel/zone buttons are activated using advanced capacitive touch plates that sit under a clean front surface. Standard or user defined inserts enable Revio to be adapted for virtually any environment and configuration.

Revio is the only lighting control user interface available that allows for simple on/off raise lower control, scenes, and individual zone control within a single gang control.



1 Button



2 Button



4 Button
Vertical



4 Button
Horizontal



6 Button



4 Scenes &
4 Zones or
8 Scenes



Powering Business Worldwide

Button Functions

- Scene selection
- Scene raise/lower
- Channel raise/lower
- Toggle on/off
- Toggle raise/lower
- True off
- Open/close (for curtains or blinds)
- Raise/lower (for motorized screens)
- Task (start/stop a sequence)

Infra Red Receiver - When fitted takes place of bottom button

Mechanical Data

Polycarbonate cover

"Clean" switch, when pressed, allows the control panel to be wiped clean without changing light levels.

All plastic construction with a separate steel chassis that is affixed to wallbox as first fix with the unit attaching to chassis with screws.

Requires NEMA (US Style) backbox
3"h x 2"w x 2.5"d

Electrical Data

Variable fade times programmable from 0.1seconds to 60 minutes per button.

12Vdc powered direct from iCAN network

Tested to withstand 12kV electro-static discharge without damage or memory loss.

Flash memory for future proof upgradeability.


Connects via Cat5 FTP using terminals

Environmental Data


Temperature Range: 0°C to +40°C

Humidity: 0% - 95% non condensing

Dimensions

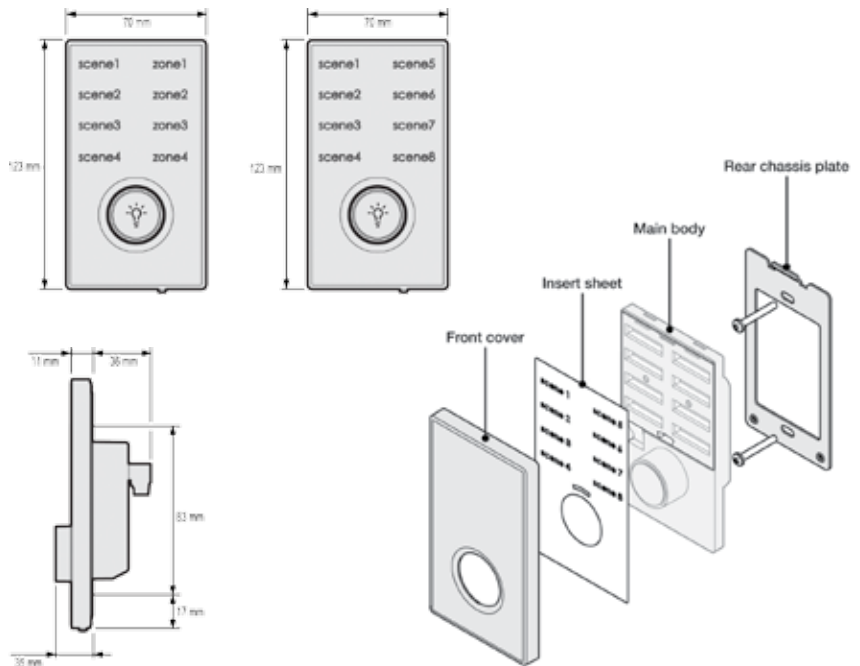


Ordering Codes

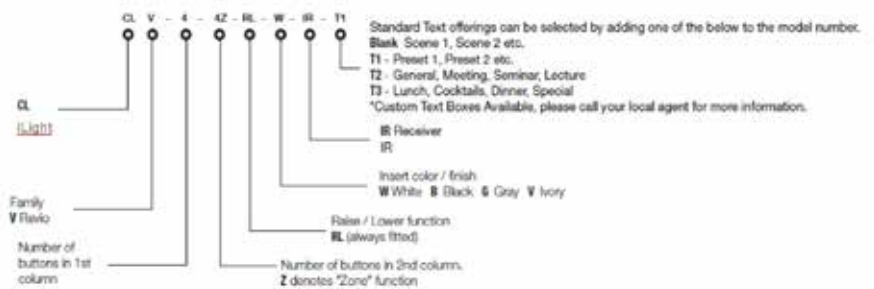

Custom text available. Complete the Custom Order Form available at:

<http://www.ilight.co.uk/support-literature.html>

Typical Schematic

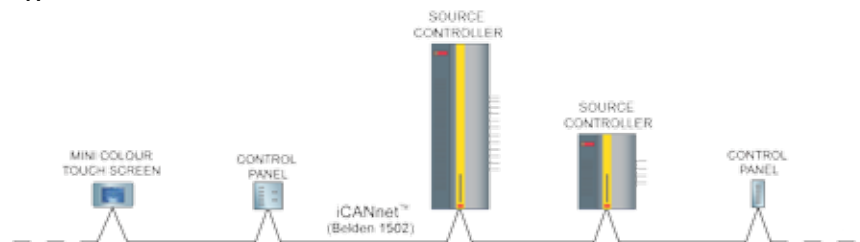

Contact your local Eaton of ce

DISTRIBUIDOR EM PORTUGAL

R. Sá de Figueiredo 6 - C
2790-233 Carnaxide
Telef. (+351) 21 417 76 21 ♦ Fax. (+351) 21 030 00 31
Web: www.sisilite.pt - email: geral@sisilite.pt

EATON
Powering Business Worldwide

© 2016 Eaton
All Rights Reserved

Document No: REVIO Rev9 1115

Eaton Industries Manufacturing GmbH
Electrical Sector EMEA
Route de la Longeraie
71110 Morges, Switzerland
Eaton.eu

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

CE

