

# STARBOX

## Star wire interface

### Mechanical Data

Power/Output Cable Access:  
5 x 25.5mm knockouts, 5 x PG16  
knockouts

Control Cable Access: 1 x 25mm  
knockout, 1 x PG16 knockout

Climate Range:  
Temperature: +2°C to +40°C  
Humidity: +5 to 95% non condensing

Control Inputs:  
Two sets of terminals for iCANnet™  
network

### Electrical Data

Supply: Powered from iLight network

Protection:  
Fully transformer isolated ethernet


Terminal Sizes:  
iCANnet™ network cable size: 5 x 1.5mm<sup>2</sup>  
Control input cable size: 10 x 1.5mm<sup>2</sup>

### Overview

Star wire interface provides network branch capability by allowing all cables from iLight's iCANnet™ network to be connected back to one central point.

The device enables an existing lighting control system in need of modernisation/ updating to be successfully converted to an iLight lighting control system. Up to six network segments may be connected per box.

### Dimensions

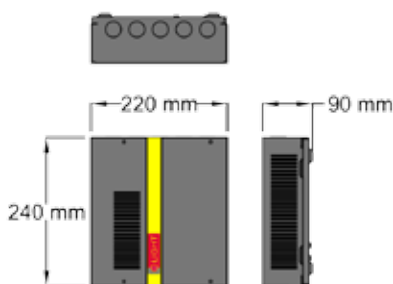

## Contact your local Eaton office

DISTRIBUIDOR EM PORTUGAL

R. Sá de Figueiredo 6 – C  
2790-233 Carnaxide  
Telef. (+351) 21 417 76 21 ♦ Fax. (+351) 21 030 00 31  
Web: [www.sisilite.pt](http://www.sisilite.pt) - email: [geral@sisilite.pt](mailto:geral@sisilite.pt)

**EATON**  
Powering Business Worldwide

Eaton Industries Manufacturing GmbH  
Electrical Sector EMEA  
Route de la Longeraie  
71110 Morges, Switzerland  
Eaton.eu

© 2016 Eaton  
All Rights Reserved

Document No: STARBOX Rev4 0115

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

