

UIM

Mini UIG

Key Features

- 6 inputs which each can be individually configured as 0-5V analogue, digital or photoelectric cell inputs
- 8 sequences with up to 30 steps per sequence
- Only 42mm Ø so easily fits in European and UK junction / back boxes
- Configuration stored in Non Volatile EEPROM
- Firmware storage in reflashable FLASH memory over iCAN network
- Configurable start up mode
- CE compliant to all relevant standards
- Designed and manufactured to ISO9001:2008 standards




Overview

iLight network powered universal interface with Six configurable inputs. Can be dry loop contact closure for scene selection or 0-5V analogue inputs. 42mm diameter potted PCB with 20cm flying leads, designed to fit European back boxes and ideal for connection to "dumb" push buttons and rocker switches. Does not include LED tellback.



Dimensions

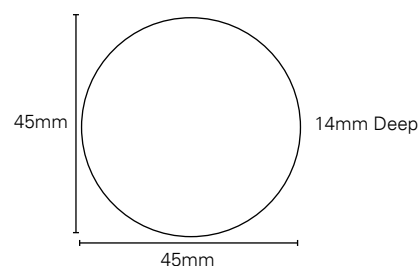

Contact your local Eaton office

DISTRIBUIDOR EM PORTUGAL



R. Sá de Figueiredo 6 - C
2790-233 Carnaxide
Telef. (+351) 21 417 76 21 ♦ Fax. (+351) 21 030 00 31
Web: www.sislite.pt - email: geral.sislite@sislite.pt

Eaton Industries Manufacturing GmbH
Electrical Sector EMEA
Route de la Longeraie
71110 Morges, Switzerland
Eaton.eu

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.