

GR2

In-Ground IP68 LED Luminaire

Key Features

- Energy saving LED solution, utilising a single high output LED
- Low profile housing with high Ingress Protection
- Choice of LED colours and to suit a wide range of applications
- Quick and simple to install with simple spring clip retention
- Supplied complete with 3m lead
- Ideal for exterior applications

Lamp Colour Options

- CW** Cool White
- WW** Warm White
- RB** Royal Blue

Bezel Colour Options

SS - Satin silver


Materials

- Body - Aluminium
- Bezel - 316 stainless steel
- Facia - 5mm toughened glass lens

Lamp Options



- 1 x 1W LED

Beam Angles

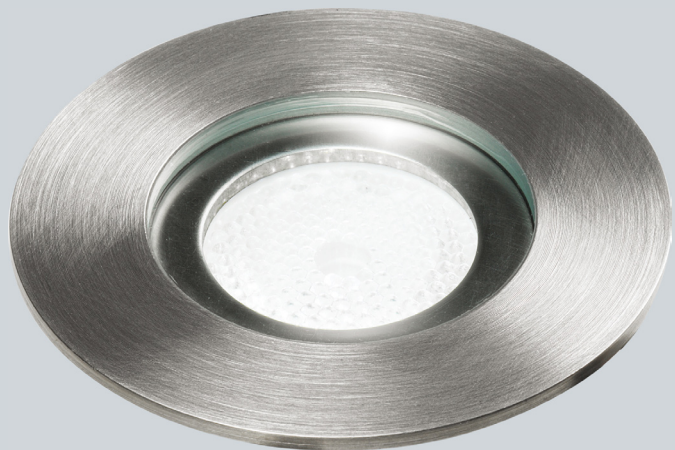

This high output luminaire is ideal for installations where IP68 is a necessity, providing a low profile ground light with a single 1W LED. The unit is manufactured from high quality materials, sealed for life and supplied c/w 3m cable.

Dimensions

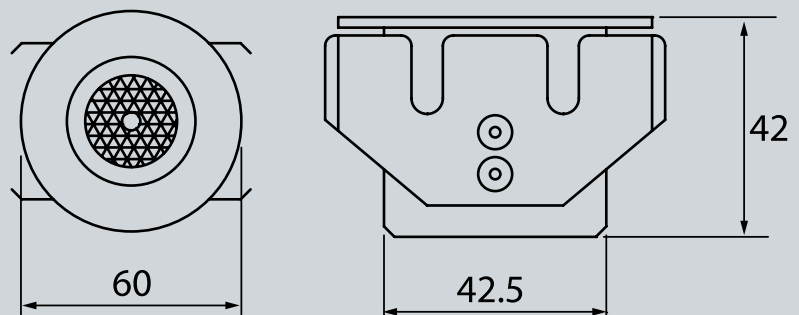


Weight

- 0.5kg

Installation

- Suitable for interior and exterior applications
- Supplied complete with 3m cable as standard
- Requires 50mm cut out



Power Input


- 350mA

Power Consumption


- 1.2W

Wiring Diagrams

Single fitting wired in series



Multiple fittings wired in series

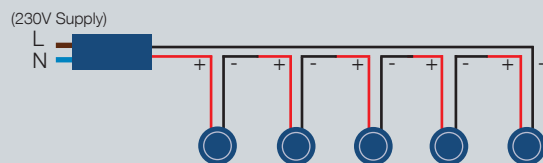

Recommended Drivers & Cables

- Driver to be ordered separately
- Recommended fixed output IP67 driver Cat No: LS-MPL01IP
- LS-MPL01IP will drive 1 x 1W LED's, so can operate 1 of the GR2 luminaires

Ordering Codes

