

GXR2

Robust In-Ground IP65 LED Luminaire

Key Features

- Suitable for indoor and outdoor use
- Shallow body for easy installation compared to traditional high power uplighters
- Energy saving LED solution
- High quality solid machined aluminium body
- Choice of LED colour and beam angle

Lamp Colour Options

- | | |
|-------------------------|------------------------------|
| CW Cool White | R Red |
| NW Neutral White | G Green |
| WW Warm White | RB Royal Blue |
| A Amber | RGB Colour Change RGB |

Bezel Colour Options

S - Stainless Steel A - Aluminium

Materials

- Body - 25 micron anodised aluminium
- Bezel - marine grade 316 stainless steel or 25 micron anodised aluminium
- Fascia - UV stable cast resin

Lamp Options


- 12 x 1W LEDs

Beam Angles



Building facades, atria's and statues can be brought to life with the creative use of uplighting. The GXR range takes this popular lighting practice to a new level with the benefits of LED technology. Colour capability both fixed and dynamic colour changing bring endless possibilities normally restricted by limited colour filter options when using conventional sources and the maintenance free, long life and low energy properties of LED's provide through life financial and sustainability benefits.

Dimensions

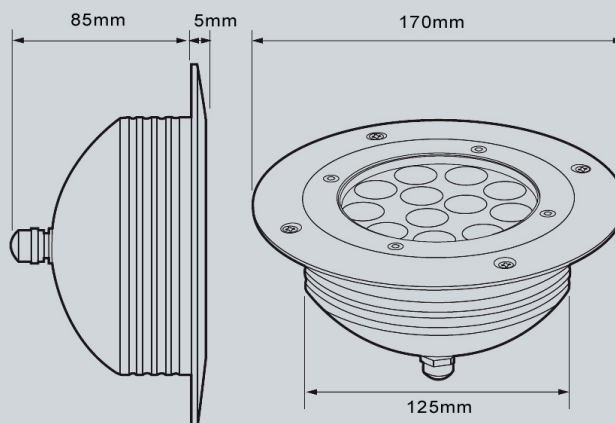

Weight

- 1.7kg

Installation

- Suitable for indoor or outdoor use
- Ground sleeve ordered separately
- 2.0m driver connection lead
- Body screws to sleeve
- Bezel and fascia retained by allen key screws

Power Input


- 350mA

Power Consumption


- 15.6W

Wiring Diagrams

Single fitting wired in series



Multiple fittings wired in series

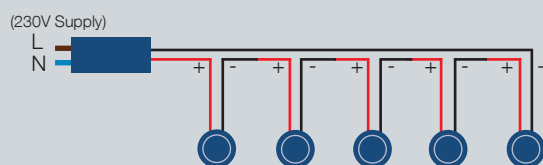

Recommended Drivers & Cables

- Driver/Colour change controller to be ordered separately
- Recommended fixed output driver, Cat No. LS-PD312.
- Operates four 3 x 1W, two 6 x 2W or one 12 x 1W luminaires.
- For fixed colour 18 x 1W, 36 x 1W and all colour change options, use driver Cat No. LS36RGB-DMX

Ordering Codes

