

LS-24V-200

Mains Powered PSU with 24V Output

Key Features

- Compact design housing for easy installation
- Threefold PSU protection
- CE approved

Protection

- Over Load Protection
- Short Circuit Protection
- Open Circuit Protection

Standards

- EN 61347-2, EN55015:2006,
- EN 61000-3-2, EN 61547,
- EN 61047, EN 62384:2006

Approval

- CE, EMC, FCC Class B

Electrical Specifications

Input

Input Voltage Range: 100 to 240V AC

Input Frequency: 50Hz / 60Hz

Consumption: 3.5A

Connection: Mains AC loop-in

Stand-by Power: <1W

Current Regulation: <5% current

tolerance <10% on all outputs.

Output: 24V @ 8.4amp

Environmental

Operating Ambient Temperature:

-20°C to + 40°C

Storage Ambient Temperature:

-10°C to + 70°C


Relative Humidity: 80% MAX



The LS-24V-200 is a power supply delivering a constant voltage of 24V with a maximum output of 200W.

Suitable for powering the RL & DL range, LE1, FS3 and FS4 Cogent fittings.

Dimensions

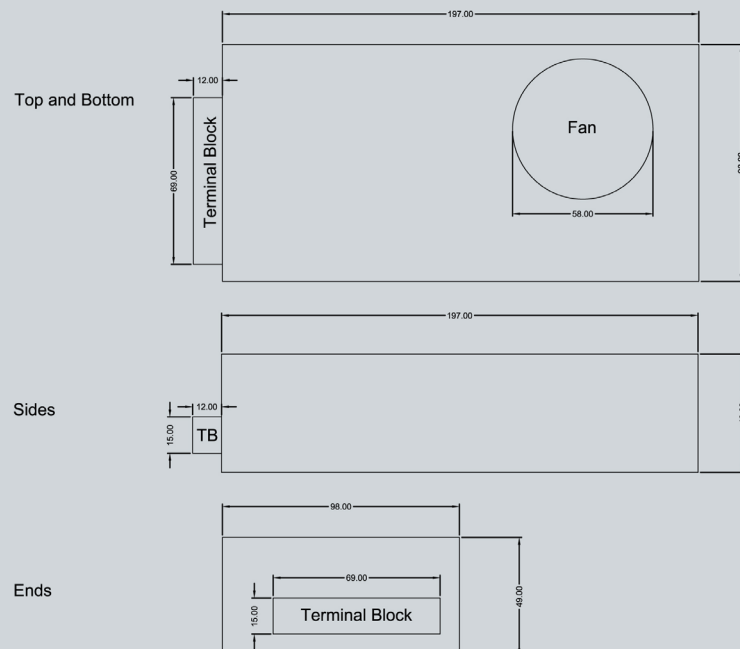

Ordering Codes

LS-24V-200 = Power Supply with 24V output @ 200W