


irCUE Receiver 485

Infra-red Receiver

cue

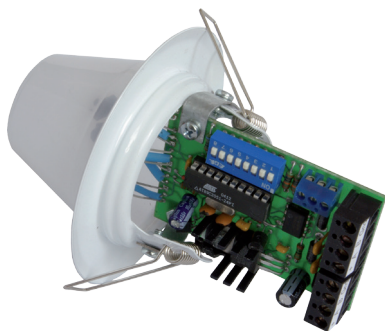

Description

The irCUE Receiver 485 links IR wireless control panels to the CUEwire. It is an infrared receiving unit designed for ceiling mounting (similar to halogen lamps mounting). Using multiple IR receivers within the unit, the irCUE Receiver 485 provides signal receiving in a horizontal plane from all directions.

Specifications

Wireless communication

- One-way, IR receiving
- Receiving in horizontal plane 0° - 360°
- Receiving in vertical plane 60°

Address settings

- DIP switch

System communication

- CUEwire, 4-pin connector 5.08 mm

Power supply

- 24 VDC (+/-20%), 1 W, 2-pin connector 5.08 mm

Physical

- Metal enclosure, plastic cover

Dimensions

- Diameter 81 mm / 3.2"
- Height 104 mm / 4.1"
- Weight 0.1 kg / 0.2 lb

Operating environment

- Temperature 10° to 40° C
- Humidity 10% to 90% non-condensing

Main Features

- IR communication
- Compatible with irCUE and SONY remoters up to 12-bit codes
- Receiving in horizontal plane 0° - 360°
- CUEwire system communication
- Fully compatible with all ipCUE controllers
- Metal enclosure with plastic cover
- Ceiling mounting

Applications

- Commercial single-room applications
- Meeting rooms, conference rooms, boardrooms
- Museum
- Complete residential home automation

Order Information

Product code CS0169

Box Contents

irCUE Receiver 485

Warranty Conditions, CE Declaration, RoHS Declaration

Data Sheet, Cue System Connector Wiring Sheet

DISTRIBUIDOR EM PORTUGAL



R. Sá de Figueiredo 6 - C

2790-233 Carnaxide

Telef. (+351) 21 417 76 21 ♦ Fax. (+351) 21 030 00 31

Web: www.sislite.pt - email: geral.sislite@sislite.pt