

PRODUCT GUIDE

**AV products
For professionals**



Audipack[®]

It's great to have solutions...



Go back to the first page



Go to a specific page



Search for products



Go to the last page

Lift systems	
Lift system solutions	85
Wall mounted lift systems	86
Multimedia Trolley	91
Pop up lift systems	93
Fold down ceiling lift systems	96
Liftomatic® rental systems	100



Click to go to the chapter



Go to the previous page



Go to the next page

DISTRIBUIDOR EM PORTUGAL



R. Sá de Figueiredo 6 - C
2790-233 Carnaxide

Telef. (+351) 21 417 76 21 ♦ Fax. (+351) 21 030 00 31
Web: www.sislite.pt - email: geral.sislite@sislite.pt



Audipack®

It's great to have solutions...

Audio Solutions

Soundbar audio solutions for flat panels	3
Audio solutions for boardrooms and public areas	6

FLEX-800

FLEX-800	9
----------------	---



Floorstands & supports

700 series floor stands	16
800 series floor stands	24
900 series floor stands	28
1000 series floor stands.....	36
Height adjustable floor stands	38
All-in-one trolley	42
Presentation trolleys.....	46
Mobile video wall display.....	50

Mounting solutions

Table stands and mounts	53
Video wall mounting solutions	55
Wall mounts	60
Flat panel presentation board	64
Wall arms	66
Ceiling mounts.....	70
Ceiling to floor solutions.....	76
Column mounts	81
Truss mounts.....	83

Lift systems

Lift system solutions	85
Wall mounted lift systems	86
Multimedia Trolley	91
Pop up lift systems.....	93
Fold down ceiling lift systems	96
Liftomatic® rental systems	100

Housings & kiosks

Indoor housings.....	103
Outdoor housings.....	109
Presentation kiosks and displays.....	115

Projector-solutions

Projector mounts.....	118-A
Ceiling mounts.....	119
Truss mounts.....	127
Short throw wall arms	131

Stacking solutions

Stack- and rigging frames	133
---------------------------------	-----

Housings

Projector housings	135
--------------------------	-----

Lift systems

Ceiling lift systems	139
Pulley service lift systems	147
Mirror-Kit projection systems	151
Pop up Lift system.....	155
Liftomatic® rental systems	157

Rotation systems

Rota-Kit®, rotate your projector	159
--	-----

Tablet solutions

Tablet housings	161
-----------------------	-----

Video conference solutions

Video conference	165
------------------------	-----

Flightcases and transport cases

Flightcases and transport cases	169
---------------------------------------	-----

AV furniture

AV furniture	173
--------------------	-----

Silent series interpreter booth

Silent series interpreter booth	175
---------------------------------------	-----

Specials & projects

Specials & projects	179
---------------------------	-----

Brand related solutions

Samsung brand related solutions	184
---------------------------------------	-----

Audipack – your partner whatever the application

Digital signage



Page 55



Page 103



Page 118

Education



Page 42



Page 46



Page 87

Home cinema



Page 66




Page 97



Page 138

Marine



Page 66



Page 97



Page 98

Professional AV



Page 24



Page 138



Page 149

Video conference



Page 60



Page 162



Page 164

Rental



Page 39



Page 101



Page 154

Conference



Page 133



Page 171



Page 173

Staging




Page 35



Page 131

Did you know that...

All Audipack products, whether standard or custom built, are designed and manufactured in-house in the Netherlands. Our products are developed in conjunction with our clients to meet the needs of AV professionals and end users. They are designed for ease of use and durability for many years. Audipack manufacture high quantity standard products or unique made-to-measure pieces for individual projects. Many products are CE, EMC tested and TUV approved to meet safety regulations. Audipack also offers a 3 to 5 year factory warranty on all products.*

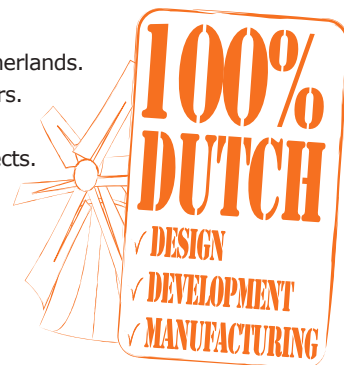

*Warranty conditions are available on requested and are stated in our general conditions of sale.

All dimensions and weights are approximate, and should not be used for specifications.

The general terms and conditions of sale and delivery are as registered in the trade register at the Chamber of Commerce of Gouda under no. 29031068 and the District Court of Rotterdam under no. 369/92 are applicable to all our deliveries.

Audio solutions

Sound and Design

Audio solutions

Perfect audio add-on solution for flat panels and video walls. Design audio solutions to integrate speakers visually less obtrusive in public areas.



Audipack®

It's great to have solutions...

Professional audio solutions



Wall mounted soundbar with 84" screen

The perfect audio add-on for any screen of any size videowall

Finding a fitting solution like this is normally quite a quest to find, but Audipack manufactures custom built soundbars and audio solutions to fit any screen, presentation assembly or videowall.

The main advantage is that these speaker solutions are custom built for any application and provides mounting features to any Audipack related product. No need to install more components than needed and save time by simply combining products that match each other.



Think smart, be quick.

No more unnecessary work with the Audipack soundbar with System 55 add-on. Use the Audipack soundbar as central hub for AV connectivity. Insert System 55 connections and control your media via the soundbar and save time and costs in labor and constructional installations. The S551 / S552 / S553 add-on provides a single, double or tripple mounting chassis in the speaker for System 55 Functionality.



Options

- ▲ Custom sizes in length and output
- ▲ Wall mounts
- ▲ Mounts to all Audipack presentation systems
- ▲ Stereo mini amplifier



SOUNDBAR FOR FLAT PANELS



LST PASSIVE SLIM STEREO SOUNDBAR



Ref	LST-XXXXSB
Dimensions in mm	W (screen) x D 70 x H 90
Standard power	2 x 30 Watt RMS at 8 Ohm
Optional	2 x 60 Watt RMS at 8 Ohm
Frequency	120 Hz - 20 KHz
Connection	wire connect with internal connector
Colour	Black front & sides with aluminium body
<i>The LST soundbar is made to match the screen, XXXX refers to the screen width in mm.</i>	
<i>Use in combination with the LSS-80SW for an optimum sound experience.</i>	



The LSS soundbars are manufactured for every brand, please refer to the Audipack website & price list for an updated product list.

LSS PASSIVE SLIM STEREO SOUNDBAR



Ref	LSS-XXXXSB
Dimensions in mm	W (screen) x D 143 x H 147
Standard power	2 x 30 Watt RMS at 8 Ohm
Optional	2 x 60 Watt RMS at 8 Ohm
Frequency	70 Hz - 20 KHz
Connection	wire connect with internal connector
Colour	Black front & sides with aluminium body
<i>Although not needed, use in combination with the LSS-80SW for an optimum sound experience.</i>	
<i>The LSS soundbar is made to match the screen, XXXX refers to the screen width in mm.</i>	



The LSS soundbars are manufactured for every brand, please refer to the Audipack website & price list for an updated product list.

AUDIPACK SYSTEMS 55 ADD-ON FOR SOUNDBARS



Ref.	LST-XXXXSB-S55
	LST-XXXXSB-S551 With 1 System 55 feature
	LST-XXXXSB-S552 With 2 System 55 feature
	LST-XXXXSB-S553 With 3 System 55 feature
Ref.	LSS-XXXXSB-S55
	LSS-XXXXSB-S551 With 1 System55 feature
	LSS-XXXXSB-S552 With 2 System55 feature
	LSS-XXXXSB-S553 With 3 System55 feature

*Compatible with Crestron, Extron, Neets, Gira, Jung, Control4
Equipment not included.*

COMPACT SOUNDBAR FOR VIDEO CONFERENCE APPLICATIONS



Ref	LSS-SB20	LSS-SB40
Dimensions in mm	W 422 x D 143 x H 147	W 422 x D 143 x H 147
Description	mono internal soundbar	stereo internal soundbar
Max. power	1 x 30 Watt RMS	2 x 20 Watt RMS
Frequency	70 Hz - 20 KHz	70 Hz - 20 KHz



This model fits the VCF-SL videoconference furniture line (page 177)

LINE ARRAY SPEAKER SYSTEM (STACKABLE)




To complement the experience...

Line array (column) speakers are ideal audio add-ons for video wall trolley's , video walls and led applications.

The AR speaker is customized to match the height of the screen. See page 47.

The AR speakers require a high output 3rd party external amplifier.



Ref.	LSS-XXXXAR (custom length version)
Dimensions in mm	W 147 x D 143 x H XXXX
Max power	240 Watt per unit at 8 Ohm
Frequency	200Hz - 20 KHz
Connections	Speakcon
Wall mounts	Included
Colour	Anodized aluminium with black or white speaker front



Ideal audio add-on for video wall trolley's and led applications. The AR speaker is customized to match the height of the screen. See page 41 and 51.

PROFILE SPEAKER SET (CUSTOM-BUILT)



Ref.	LSS-XXXXPR
Dimensions in mm	W 147 x D 143 x H XXXX (height screen)
Max power	2 x 30 Watt RMS at 8 Ohm
Connections	wire connect & banana plug
Colour	Anodized aluminium with black or white speaker front



The Profile speaker set is a vertical orientated speaker set made to match the height of larger screens and videowalls. Internal speaker technology is based on the LSS soundbar systems. The Profile speaker is installed on each side of the screen and is available in 2 x 30 Watt and 2 x 60 Watt. Custom powered versions on request.

Check the Audipack website & price list for an updated product list.

AUDIO SOLUTIONS



Unique audio solutions for public areas and boardrooms

With the LSS-UFO, Audipack presents a new way to look at audio. The modern design of the UFO offers lots of possibilities for applications in public areas and boardrooms. The UFO is a ceiling suspended speaker with 4 internal audio elements. These elements radiate the sound in the direction of their own, so that a broad beam width is created in the area. The UFO is suspended from the ceiling by 4 stainless steel wires which are adjustable in length up to 4 meters.

The combination of the anodized aluminium construction with the black or white front, not only make it a delight to look at, but also to listen to.

In combination with modern lighting technique, the UFO is a perfect solution above a conference table, in a restaurant or luxury shop. By using multiple UFO's, you have stereo sound where ever you walk in de room. With the optional 100 Volt transformer, the UFO's are also useful in 100 Volt installations.

**Ref.****LSS-UFO**

Dimensions in mm

W 706 x D 706 x H 146

Max. power

4 x 30 Watt RMS at 8 Ohm

Frequency

70 Hz - 20 KHz

Connection

wire connect with internal connector

Colour

Anodized aluminium with black or white speaker front

Ceiling mount

Included



AUDIO SOLUTIONS

ACCESSORIES

STEREO MINI AMPLIFIER

For:
LSS-UFO
LSS Soundbar
LSS Profile



Ref. 491026
Max. power 2 x 20 watts @ 8 Ohm

ACTIVE SUBWOOFER



Ref. LSS-80SW
Max. power 80 Watt
Connection 2 x cinch, wire connect & banana plug
Power supply 100-230 VAC

MOUNTING SOLUTIONS



Ref.
Mounting interface

Wall mount set
LSS-SBWM (set of 2)
M6

Wall mount set
LST-SBWM (set of 2)
M6

MOUNTING SOLUTIONS



Ref.
Mounting interface

Table stand medium <1500 mm
LSS-TSSBV4
400 mm, M6

Table stand large > 1500 mm
LSS-TSSBV6
600 mm, M6

Table stand for LST soundbar
LST-TSSB

MOUNTING SOLUTIONS



Ref.
Mounting interface
Suitable for

LSS-DWS-T
400-600 mm
DWS-T100 & DWS-T150

LSS-DWS-E
600 mm
DWS-120E & DWS-160E/DFS-120E

SOUNDBARS TO FLOOR STAND INTERFACE



Ref.
Interface for LSS soundbar

LSS-FS700
400 & 600 mm

LSS-FS800
400 & 600 mm

LSS-FS900
400 & 600 mm

Ref.
Interface for LST soundbar

LST-FS700
400 & 600 mm

LST-FS800
400 & 600 mm

LST-FS900
400 & 600 mm

FLEX-800[®] series THE ULTIMATE MONITOR FIXATIONS

The Audipack Flex-800[®] series,


*a range of products that offers perfect solutions
for Broadcast, AV and CCTV installations.*




Audipack[®]

It's great to have solutions...

Let us inspire you.....

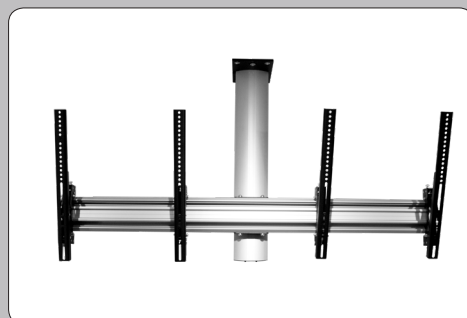

Flexible, modular and Innovative!

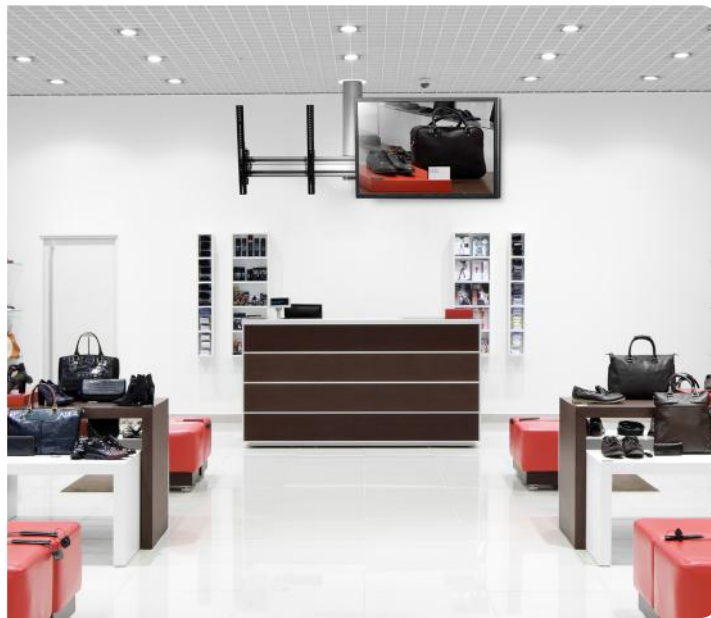

- ▲ **Fast and easy installation**
- ▲ **Quick flat panel installation and removal**
- ▲ **Flexible with many components**
- ▲ **Compatible with 700, 800 and 900 series**

FLEX-800®, the ultimate monitor fixation

Audipack introduces "the ultimate FLEX-800® solution for flat screens" for all possible configurations.

The impossible becomes an easy task with the new FLEX-800® series. The FLEX-800® series offers flexible mounting solutions for flat screens on floor stands, trolleys, wall mounts, ceiling mounts etc.

Due to the flexibility of the FLEX-800® system, you can build any desired configuration. From a simple 2x1 to 7x3 configurations. Choose from the various components and the installation is a matter of minutes.

The unique feature of this product is the comprehensive suite of components which also are compatible with the Audipack 700, 800 and 900 series floor stands.

Wall fixations, stand-alone units in broadcast studio's, multiviewers or CCTV rooms. The system is ideal for permanent installation, but also for rental.

Modular and flexible; that's what FLEX-800® series means to you.

FLEX-800® MOUNTING BARS



Including 2 cable clips
ref. **FLEX-1845** per meter

Ref.	FLEX-1800-XXXX
Dimensions	W 120 x D 60 x L custom
Length in mm	1500 - 2000 mm
Ref.	FLEX-1801-XXXX
Dimensions	W 120 x D 60 x L custom
Length in mm	2001 - 2500 mm
Ref.	FLEX-1802-XXXX
Dimensions	W 120 x D 60 x L custom
Length in mm	2501 - 3000 mm
Ref.	FLEX-1803-XXXX
Dimensions	W 120 x D 60 x L custom Length
in mm	3001 - 6000 mm

Order example for a bar of 2400 mm: FLEX-1801-2400

FLEX-800® SERIES

FLEX-800® CONNECTION SET FOR MOUNTING BARS**Ref. FLEX-1810**

Connect multiple mounting bars to get the desired length.

FLEX-800® END CAPS FOR MOUNTING BARS**Ref. FLEX-1812**

Set of 2 black end caps for a neat finish of the ends of the mounting bar.

FLEX-800® MOUNTING ARMS TO CONNECT TO MOUNTING BARS**Ref. 391817**

Dimensions in mm H 338 x W 39 x D 50
Mounting interface VESA 200



Set of 2 brackets. Direct installation on FLEX mounting bar

**Ref. 391818**

Dimensions in mm H 305 x W 39 x D 75
Mounting interface VESA 200
Tilt adjustment



Set of 2 brackets. Direct installation on FLEX mounting bar

**Ref. 391819**

Dimensions in mm H 520 x W 40 x D 50
Mounting interface VESA 200 - 500



Set of 2 brackets. Direct installation on FLEX mounting bar

**Ref. 391820**

Dimensions in mm H 520 x W 50 x D 75
Mounting interface VESA 200 - 500
Tilt adjustment in degrees 0 - 30 °



Set of 2 brackets. Direct installation on FLEX mounting bar

**Ref. 391821**

Dimensions in mm H 620 x W 39 x D 50
Mounting interface VESA 300 - 600



Set of 2 brackets. Direct installation on FLEX mounting bar

FLEX-800® SERIES

FLEX-800® WALL MOUNT FOR HORIZONTAL MOUNTING BAR



Ref. FLEX-1840

Dimensions H 250 x W 250 x D 70
Tilt adjustment 0 - 5- 10 °



Ref. FLEX-1841

Dimensions H 250 x W 250 x D 70
Fixed mount



FLEX-800® X-CONNECTION TO AUDIPACK COLUMNS




Ref.
Suitable for

FLEX-1825
700 series

FLEX-1826
800 series

FLEX-1827
900 series

FLEX-800® CEILING MOUNT - 800 COLUMN

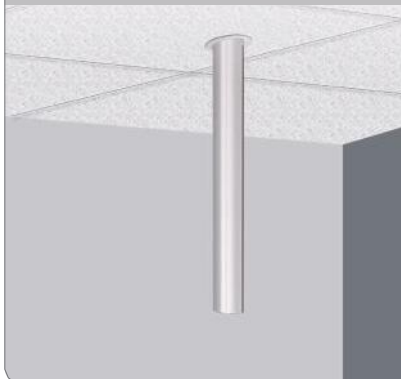

Ref. FLEX-800-1000

Length in mm 1000



Ref. FLEX-800-1500

Length in mm 1500



Ref. FLEX-800-XXXX

Length in mm custom


* Max load at symmetric load, see load diagramm for more options

Order example for 2300 mm: FLEX-800-2300

Optional CFR-800 Ceiling finishing ring



FLEX-800® CEILING MOUNT - 900 COLUMN

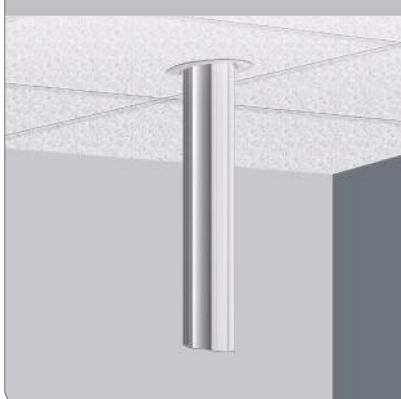

Ref. FLEX-900-1000

Length in mm 1000



Ref. FLEX-900-1500

Length in mm 1500



Ref. FLEX-900-XXXX

Length in mm custom

* Max load at symmetric load, see load diagramm for more options

Order example for 2300 mm: FLEX-900-2300

Optional CFR-900 Ceiling finishing ring



FLEX-800® SERIES

FLEX-800® - 900 FLOOR STAND



Ref.	FLEX-942-2250	FLEX-942-2750
Dimensions in mm	W 900 x D 700 x H 2250	W 900 x D 700 x H 2750
	Quick Release No tools required	Quick Release No tools required



Ref.	FLEX-943-2250	FLEX-943-2750
Dimensions in mm	W 900 x D 700 x H 2250	W 900 x D 700 x H 2750



Floor stand on wheels

Ref.	FLEX-984-2250	FLEX-984-2750
Dimensions in mm	W 900 x D 700 x H 2250	W 900 x D 700 x H 2750



Ref.	FLEX-987-2250	FLEX-987-2750
Dimensions in mm	W 900 x D 700 x H 2250	W 900 x D 700 x H 2750
	Quick Release No tools required	Quick Release No tools required



ACCESSORIES

CAMERA SUPPORT FOR FLOOR STANDS



Ref.
Max. dimensions equipment in mm
Suitable for




EC-838
W 299 x D 250
800 series



390931
W 200 x D 350
900 series



Endless configuration options....

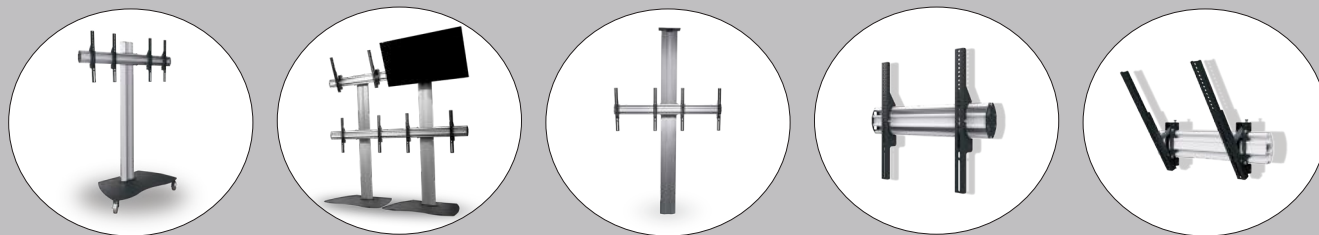

Order example:

Videowall floor stand 4x4 55" (W 1390 mm)

- 2 x floor stands FLEX-943-2700
- 4 x connector 900 series FLEX-1827
- 2 x mounting bar FLEX-1802-2780
- 2 x set end caps FLEX-1812
- 2 x set adjustable mounting arms 391820
- 2 x set mounting arms 391819



Order example:

Mobile display 2x1 42" (W 972 mm)

- 1 x floor stands FLEX-984-2750
- 1 x connector 900 series FLEX-1827
- 1 x mounting bar FLEX-1800-1900
- 1 x set end caps FLEX-1812
- 2 x set mounting arms 391819



Order example:

Videowall 3x1 42" (W 972 mm)

- 2 x wall mount FLEX-1840
- 1 x mounting bar FLEX-1802-2900
- 1 x set end caps FLEX-1812
- 6 x set mounting arms 391819




700 series

Flat panel floor stands

The 700 series Flat panel floor stands

The well-known Audipack 700 series is a range of double column supports and stands for flat panels offering stability combined with flexibility.

It's a concept that meets the functional, technical and aesthetic demands of today's professional presentations.

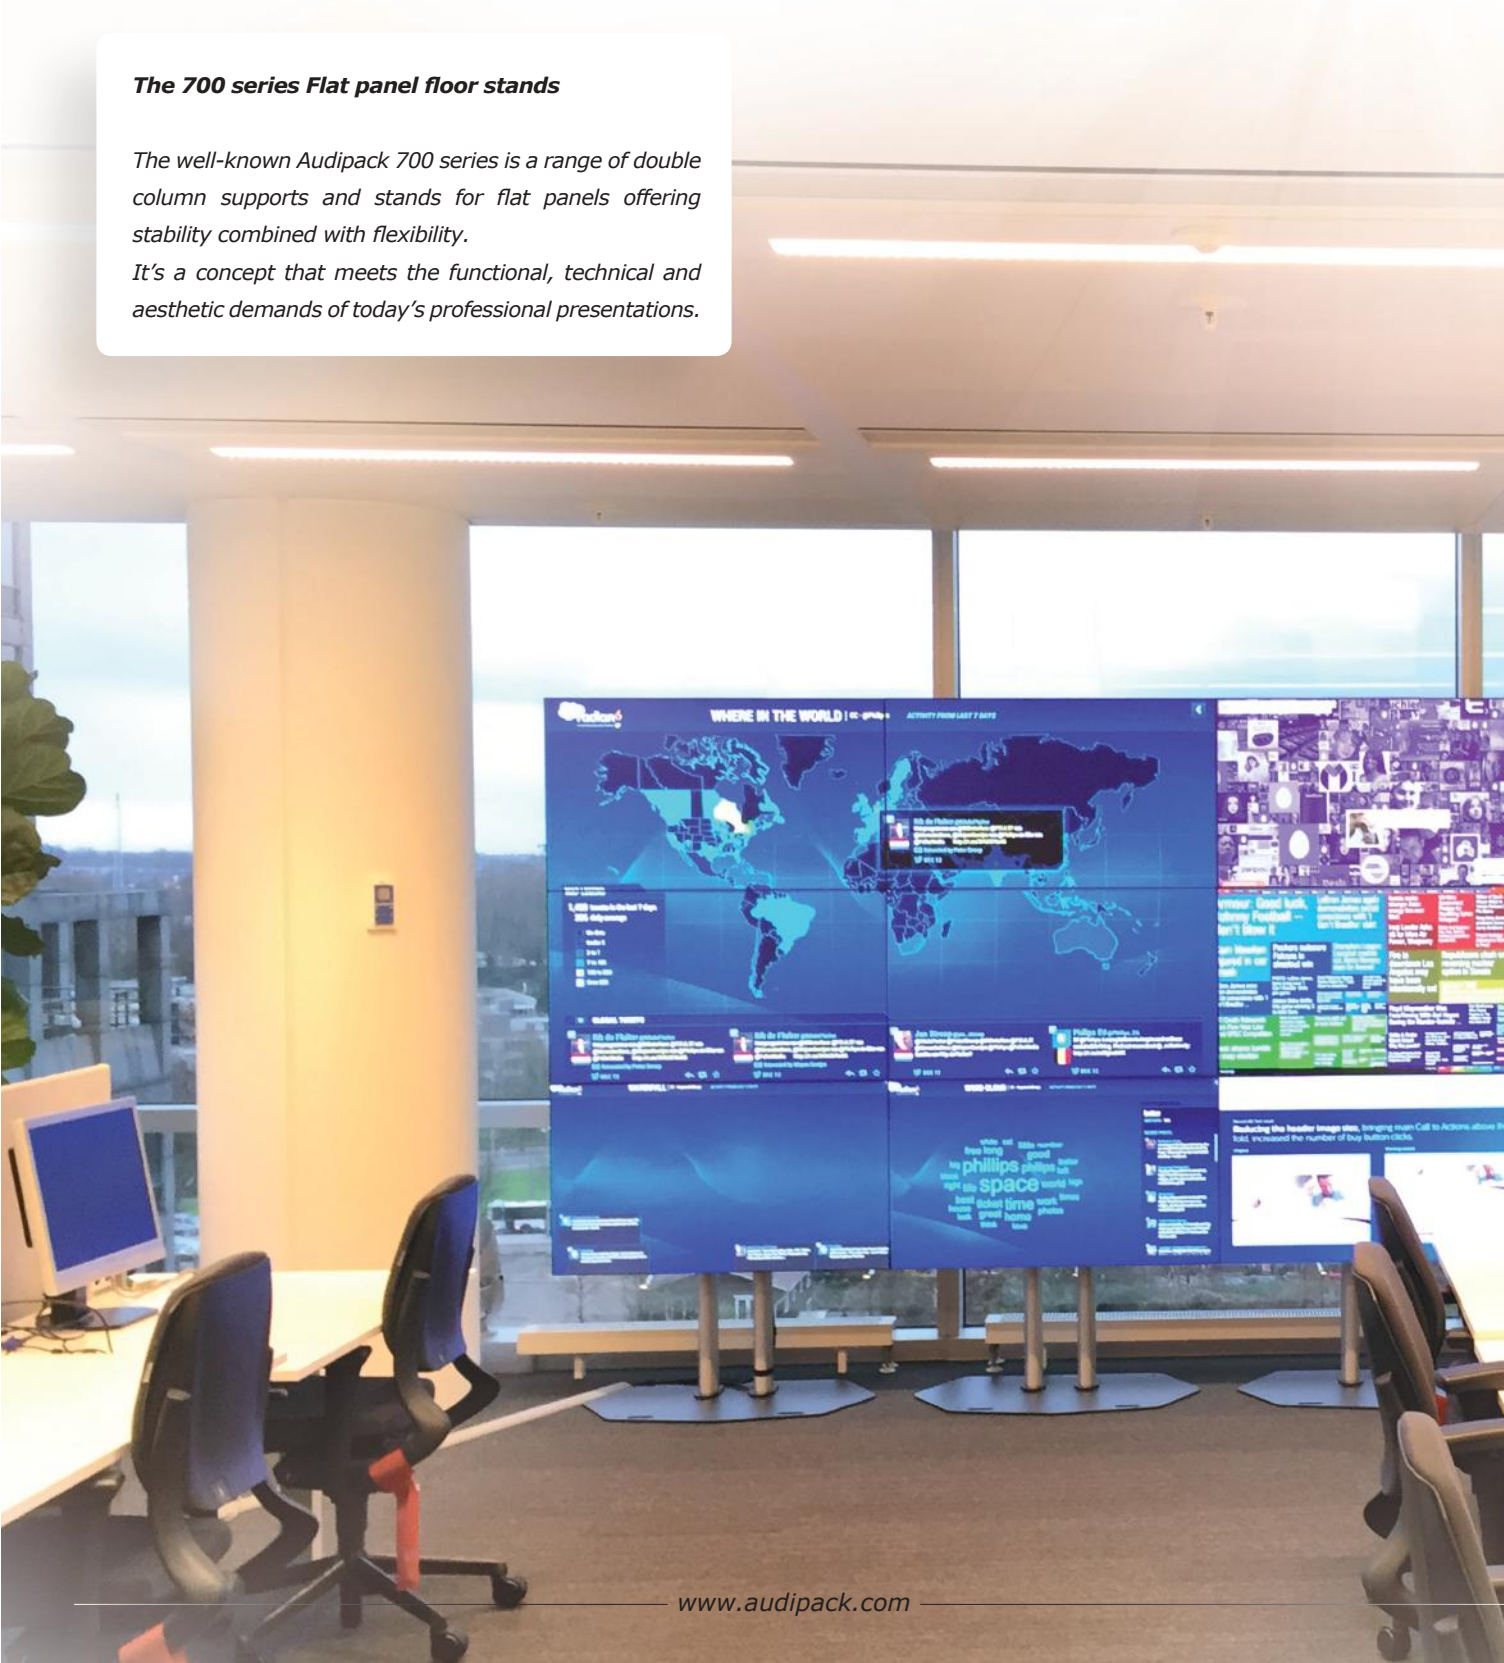

Audipack 700 series, designed to be **displayed!**



- ▲ **Landscape or portrait screen positioning**
- ▲ **Integrated cable channels**
- ▲ **Continuously adjustable flat panel height**
- ▲ **Standard or custom built models available**

The Audipack 700 series flat panel floor stands – presentation solutions offering many advantages.

The Audipack 700 series is a range of supports and stands for flat panels that offers precision combined with flexibility.

Meeting the functional, technical and aesthetic demands of today's professional presentations, they create a base for numerous applications where design, safety, user-friendliness and flexibility are key requirements.

Choose your interface.

The FS series is available with 2 different screen interfaces. The L&S 5 is the Audipack's AV cross rental solution with a wide variety of installation options on the job. The Mult-Vesa solution is a very cost effective mounting interface based on the Vesa mounting pattern on the screen.

With mounting cams the screen can easily be locked in the mounting head.



L&S 5



Mult-Vesa

The perfect rental combination.

The 700 series quick release floor stands can be separated by hand and fitted into an Audipack flight case along with the flat panel. Available for any screen size.

Flight cases are available in different colours with optional logo prints. Please refer to our separate flight case section on page 158 for more flight case solutions.



Detachable (cable) covers

Available with
scratch resistant coating

Neatly concealed cables

Quick release,
perfect rental solution

700 SERIES FLOOR STANDS

700 SERIES FLOOR STANDS DOUBLE COLUMN

L&S 5



Multi-Vesa



Ref.	390700	FS-700V6	Max. "	Max. Kg
Dimensions in mm	W 900 x D 450 x H 1821	W 900 x D 450 x H 1821	55	60
Mounting interface	L&S 5	VESA 200, 400, 600		
Nett weight	39 Kg	39 Kg		
Ref.	390701 (BK*)	FS-701V6	Max. "	Max. Kg
Dimensions in mm	W 900 x D 450 x H 1829	W 900 x D 450 x H 1829	55	60
Mounting interface	L&S 5	VESA 200, 400, 600		
Nett weight	45 Kg 	45 Kg 		
Ref.	390702 (BK*)		Max. "	Max. Kg
Dimensions in mm	W 900 x D 530 x H 2029		65	60
Mounting interface	L&S 5			
Nett weight	46 Kg 			
Ref.	390707 (BK*)		Max. "	Max. Kg
Dimensions in mm	W 900 x D 530 x H 1829		65	85
Mounting interface	L&S 5			
Nett weight	49 Kg 			
Ref.	390708		Max. "	Max. Kg
Dimensions in mm	W 900 x D 530 x H 1821		65	85
Mounting interface	L&S 5			
Nett weight	42 Kg			
Ref.	390746		Max. "	Max. Kg
Dimensions in mm	W 900 x D 700 x H 2029		65	85
Mounting interface	L&S 5			
Nett weight	63 Kg			

* Available with scratch resistant floorplate, for example: Ref.: **390701BK**

700 SERIES FLOOR STANDS ON WHEELS

L&S 5



Multi-Vesa



Ref.	390704	FS-704V6	Max. "	Max. Kg
Dimensions in mm	W 900 x D 530 x H 1804	W 900 x D 530 x H 1804	65	60
Mounting interface	L&S 5	VESA 200, 400, 600		
Nett weight	40 Kg	40 Kg		
Ref.	390705		Max. "	Max. Kg
Dimensions in mm	W 900 x D 530 x H 1812		65	60
Mounting interface	L&S 5			
Nett weight	51 Kg 			

700 SERIES FLOOR STANDS BACK TO BACK

L&S 5



Ref.	390706	Max. "	Max. Kg
Dimensions in mm	W 900 x D 600 x H 1821	65 + 65	80
Mounting interface	L&S 5		
Nett weight	42 Kg		
Load	80 kg symmetrical		

700 SERIES FLOOR STANDS

700 SERIES FLOOR STANDS EXTRA STABILITY



L&S 5

Ref.

390780

Dimensions in mm

W 1255 x D 733 x H 1856

Mounting interface

L&S 5

Nett weight

32 Kg



See page 16 for the optional coverplate (390781) for finishing the wheel frame.

700 SERIES (TEMPORARILY) VIDEO WALL FLOOR STAND



L&S 5

Ref.

390725

Dimensions in mm

W 900 x D 530 x H 2729

Mounting interface

L&S 5

Nett weight


60 Kg



3 x



700 SERIES FLOOR MONITOR STANDS



L&S 5

Ref.

390722

Dimensions in mm

W 900 x D 530 x H 421

Mounting interface

L&S 5

Angle adjustment

0° up to 60°

Nett weight

27 Kg



Ref.

390720

Dimensions in mm

W 900 x D 530 x H 423

Mounting interface

L&S 5

Angle adjustment

0° up to 60°

Nett weight

27 Kg



700 SERIES FLOOR MONITOR STANDS ON WHEELS



L&S 5

Ref.

390723

Dimensions in mm

W 900 x D 530 x H 554

Mounting interface

L&S 5

Angle adjustment

0° up to 60°

Nett weight

30 Kg



Ref.

390721

Dimensions in mm

W 900 x D 530 x H 556

Mounting interface

L&S 5

Angle adjustment

0° up to 60°

Nett weight

30 Kg



700 SERIES FLOOR STANDS


700 SERIES FLOOR STANDS SINGLE COLUMN



Ref.	390770	FS-770V6
Dimensions in mm	W 900 x D 450 x H 1821	W 900 x D 450 x H 1821
Mounting interface	L&S 5	VESA 200, 400, 600
Nett weight	26 Kg	26 Kg



Ref.	390771	FS-771V6
Dimensions in mm	W 900 x D 450 x H 1829	W 900 x D 450 x H 1829
Mounting interface	L&S 5	VESA 200, 400, 600
Nett weight	32 Kg	32 Kg




Quick Release
No tools required

Quick Release
No tools required


700 SERIES FLOOR STANDS SINGLE COLUMN ON WHEELS



Ref.	390774	FS-774V6
Dimensions in mm	W 900 x D 530 x H 1804	W 900 x D 530 x H 1804
Mounting interface	L&S 5	VESA 200, 400, 600
Nett weight	29 Kg	29 Kg



Ref.	390775	FS-775V6
Dimensions in mm	W 900 x D 530 x H 1812	W 900 x D 530 x H 1812
Mounting interface	L&S 5	VESA 200, 400, 600
Nett weight	35 Kg	35 Kg



Quick Release
No tools required

Quick Release
No tools required

ACCESSORIES

MOUNTING BRACKETS FOR FLAT PANELS (SEE PAGE 60 FOR THE FULL PROGRAM)



Mount any brand and type of flat panel on any Audipack system with the Audipack mounting brackets.



UFPRO series



Brand related mounts



VESA mounts

AUDIO SOLUTIONS




For every flat panel a made to measure soundbar is available. See chapter "Audio solutions" for more information page 3

EQUIPMENT HOUSINGS FOR FLAT PANEL STANDS

EC-1 + EC-1WLD

Housing for Mac Mini, universal media player, Barco clickshare mini

Mounting interface: L&S 5



Ref.
Max. dimensions equipment in mm

EC-1
W 200 x D 48 x H 200

EC-1WLD (Wieland connection)
W 200 x D 48 x H 200

MOUNTING HEAD FOR DOUBLE COLUMN FLOOR STANDS

Optional:
numeric lock
Ref. **230052**



*when used with some models floor stand, max. load 85 kg



Ref. **390751**

390793

EQUIPMENT CABINET FOR DOUBLE COLUMN STANDS



Ref.
Max. dimensions equipment in mm

EC-735
W 440 x D 380 x H 110

EC-736
W 440 x D 380 x H 80

EQUIPMENT HOUSINGS FOR DOUBLE COLUMN STANDS

390737
Compact and flat laptop / PC housing



Ref.
Max. dimensions equipment in mm

390737
W 400 x D 55 x H 350

LAPTOP/CAMERA SUPPORT FOR DOUBLE COLUMN STANDS



Ref.
Max. dimensions equipment in mm

390738
W 200 x D 250

390715
W 300 x D 250

390716
W 450 x D 350

700 SERIES FLOOR STANDS

LAPTOP/CAMERA SUPPORT FOR **SINGLE** COLUMN STANDS


Ref.
Max. dimensions equipment in mm



390731
W 200 x D 250

390729
W 300 x D 250

390730
W 450 x D 350

EXTENSION COLUMN SET (ONLY SUITABLE FOR 390708) FOR **DOUBLE** COLUMN STANDS

Ref.
Length in mm

Set of 2



390732
900

MANUAL PORTRAIT/LANDSCAPE ADAPTER FOR **DOUBLE** COLUMN STANDS

Ref.

Manual left and right rotation



"use in combination with UFPRO mounting brackets"

P3496

VIDEO CONFERENCE MOUNTING HEAD FOR **DOUBLE** COLUMN STANDS

Ref.
Maximum screen width in mm




390784
720 - 1100

390789
910 - 1510

More "Video conferencing solutions"
check page 154

VIDEO WALL CONNECTOR BAR, SET OF 2 FOR **DOUBLE** COLUMN STANDS

Ref.
Length in mm



390728
785-1330

More "Video wall solutions"
check page 50



700 SERIES FLOOR STANDS

COVER PLATE (SUITABLE FOR 390780) FOR **DOUBLE** COLUMN STANDS



"Soft edge finishing"
ergonomic protection



Ref.

390781

FLOOR PLATE FOR **SINGLE** COLUMN **QUICK RELEASE** STANDS



Ideal for installing underneath
the carpet, attached with screws
to the floor.



Ref.

FMP-771

FLIGHTCASE FOR DIVIDABLE 700 SERIES FLOOR STAND For more flightcase models visit our website



Ref.
Suitable for



FC-FS701T
390701, 390702



FCFS-4042W
390701, 390702
and 40-42" screen



FCFS-4650W
390701, 390702
and 46-50" screen



FCFS-5255W
390701, 390702
and 52-55" screen

800 series

Flat panel floor stands

The 800 series Flat panel floor stands

The new 800 series floor stand redefines flexibility, quick installation and installer friendliness when it comes to floor stand solutions.



Audipack 800 series, designed to be **noticed**



The 800 series floor stands are specially designed to match slim line flat panels.

The 800 series free standing display is designed to cover today's questions.

It's a slim line well thought of floor stand offering lots of options and solutions.

The column shape is nicely balanced in size for current slim-line flat panels.

The two hidden cable channels in the column are reachable by the two automatic closing doors. The 800 series column is available in a fixed version and Quick-Release tool-less rental version. By combining the floor stand with an Audipack flightcase all components are neatly organized in the flightcase together with the screen.

The perfect rental combination

The 800 series quick release floor stands can be separated by hand and fitted into an Audipack flight case along with the flat panel. Available for any screen size.

Flightcases are available in different colours with optional logo prints. Please refer to our separate flightcase section on page 175 for more flightcase solutions.



- ▲ **Elegant column design**
- ▲ **Landscape or portrait positioning of the panel**
- ▲ **Two integrated cable channels**
- ▲ **Continuous height adjustment**
- ▲ **Integrated measuring ruler for precise positioning**
- ▲ **Standard models or custom built available**



Easy cable access



Available with
scratch resistant coating



Flat panel position ruler



Quick release,
perfect rental solution

800 SERIES FLOOR STANDS

800 SERIES FLOOR STANDS



Ref.	FS-800	FS-800V4	Max. °	Max. kg
Dimensions in mm	W 900 x D 450 x H 1821	W 900 x D 450 x H 1821	55	60
Mounting interface	L&S 5	VESA 300, 400, L&S 5		
Nett weight	25 Kg	25 Kg		
Ref.	FS-801 (BK*)	FS-801V6 (BK*)	Max. °	Max. kg
Dimensions in mm	W 900 x D 450 x H 1829	W 900 x D 450 x H 1829	55	60
Mounting interface	L&S 5	VESA 200, 400, 600 L&S 5		
Nett weight	25 Kg	25 Kg		
Ref.	FS-804	FS-804V6	Max. °	Max. kg
Dimensions in mm	W 903 x D 780 x H 1906	W 903 x D 780 x H 1906	65	60
Mounting interface	L&S 5	VESA 200, 400, 600 L&S 5		
Nett weight	32 Kg	32 Kg		
Ref.	FS-805	FS-805V6	Max. °	Max. kg
Dimensions in mm	W 944 x D 782 x H 1914	W 944 x D 782 x H 1914	65	60
Mounting interface	L&S 5	VESA 200, 400, 600 L&S 5		
Nett weight	36 Kg	36 Kg		

* Available with scratch resistant floorplate, for example: Ref.: **FS-801BK**

MOUNTING HEAD FOR 800 SERIES



Excluding:
numeric lock
Ref. **230052**

Choose your interface

The FS series is available with 2 different screen interfaces.

The L&S 5 is the Audipack's AV cross rental solution with a wide variety of installation options on the job. The Multi-Vesa solution is a very cost effective mounting interface based on the Vesa mounting pattern on the screen. With mounting cams the screen can easily be locked in the mounting head.



Mounting interface: L&S 5
Bracket required



Mounting interface: Multi-VESA

Ref. 390851

390855

FLIGHTCASE FOR DIVIDABLE 800 SERIES FLOOR STAND

For more flightcase models visit our website



Ref.
Suitable for



FCFS-801T
FS-801



FCFS-4042W
FS-801
and 40-42" screen



FCFS-4650W
FS-801
and 46-50" screen



FCFS-5255W
FS-801
and 52-55" screen

ACCESSORIES

MOUNTING BRACKETS FOR FLAT PANELS (SEE PAGE 60 FOR THE FULL PROGRAM)



Mount any brand and type of flat panel on any Audipack system with the Audipack mounting brackets.



UFPRO series



Brand related mounts



VESA mounts

SMALL FLOOR PLATE



Ideal for installing underneath the carpet, attached with screws to the floor.



Ref.

FMP-871

EQUIPMENT HOLDER



Ref.

Max. dimensions equipment in mm

EC-835

W 440 x D 380 x H 110

LAPTOP / CAMERA SUPPORT FOR 800 SERIES



Ref.

Max. dimensions equipment in mm



EC-838

W 200 x D 250



EC-815

W 300 x D 250



EC-816

W 450 x D 350



EQUIPMENT HOLDERS


EC-1 + EC-1WLD
Housing for Mac Mini,
universal media player,
Barco clickshare mini

Mounting interface:
L&S 5



EC-1

W 200 x D 200 x H 48



EC-1WLD (Wieland connection)

W 200 x D 48 x H 200

Ref.

Max. dimensions equipment in mm

AUDIO SOLUTIONS



For every flat panel a made to measure soundbar is available. See chapter "Audio solutions" for more information page 3

900 series

Flat panel floor stands

The 900 series Flat panel floor stands

The Audipack 900 series is a range of supports and stands for flat panels offering stability combined with flexibility.

It's a concept that meets the functional, technical and aesthetic demands of today's professional presentations.



Audipack 900 series, designed to be **noticed**



Combining style with strength, the Audipack 900 series flat panel floor stands are easy on the eye and easy to install.

Calling on Audipack's many years of experience with display stands and accessories, the 900 series incorporates numerous clever features, such as an integrated height position ruler and access hatches for cabling.

As with many Audipack stands and brackets, the 900 series is equipped with the Lock&Secure quick mounting system. Once installed, the flat panel is locked firmly in place for safety and security.

Customised versions of the 900 series products are available on request.



The perfect rental combination.

The 900 series quick release floor stands can be separated by hand and fitted into an Audipack flight case along with the flat panel. Available for any screen size.

Flight cases are available in different colours with optional logo prints. Please refer to our separate flight case section on page 158 for more flight case solutions.



- ▲ **Landscape or portrait positioning of the panel**
- ▲ **Integrated yet easily accessible cable channel**
- ▲ **Continuous height adjustment**
- ▲ **Integrated measuring ruler for precise positioning**
- ▲ **Quick locking system**



Easy cable access



Available with
scratch resistant coating



Flat panel position ruler




Quick release,
perfect rental solution

900 SERIES FLOOR STANDS



Mounting interface: L&S 5



Mounting interface: Multi-Vesa

Choose your interface.

The FS series is available with 2 different screen interfaces.

The L&S 5 is the Audipack's AV cross rental solution with a wide variety of installation options on the job. The Multi-Vesa solution is a very cost effective mounting interface based on the Vesa mounting pattern on the screen. With mounting cams the screen can easily be locked in the mounting head.

900 SERIES FLOOR STANDS

L&S 5

Multi-Vesa

Ref.	390900	FS-900V6	Max. °	Max. Kg
Dimensions in mm	W 900 x D 450 x H 1821	W 900 x D 450 x H 1821	55	60
Mounting interface	L&S 5	VESA 200, 400, 600		
Nett weight	39 Kg	39 Kg		
Ref.	390901 (BK*)	FS-901V6 (BK*)	Max. °	Max. Kg
Dimensions in mm	W 900 x D 450 x H 1829	W 900 x D 450 x H 1829	55	60
Mounting interface	L&S 5	VESA 200, 400, 600		
Nett weight	45 Kg 	45 Kg 		
Ref.	390902 (BK*)		Max. °	Max. Kg
Dimensions in mm	W 900 x D 560 x H 2024		65	60
Mounting interface	L&S 5			
Nett weight	46 Kg 			
Ref.	390907 (BK*)		Max. °	Max. Kg
Dimensions in mm	W 900 x D 560 x H 1829		65	85
Mounting interface	L&S 5			
Nett weight	49 Kg 			
Ref.	390908	FS-908V6	Max. °	Max. Kg
Dimensions in mm	W 900 x D 560 x H 1821	W 900 x D 560 x H 1821	65	85
Mounting interface	L&S 5	VESA 200, 400, 600		
Nett weight	42 Kg	42 Kg		
Ref.	390942 (BK*)	FS-942V6 (BK*)	Max. °	Max. Kg
Dimensions in mm	W 900 x D 700 x H 2024	W 900 x D 700 x H 2024	90	85
Mounting interface	L&S 5	VESA 200, 400, 600		
Nett weight	63 Kg 	63 Kg 		
'Wind load norm compliant'				
Ref.	390943 (BK*)		Max. °	Max. Kg
Dimensions in mm	W 900 x D 700 x H 2025		90	85
Mounting interface	L&S 5			
Nett weight	55 Kg			
'Wind load norm compliant'				



* Available with scratch resistant floorplate, for example: Ref.: **390901BK**

900 SERIES FLOOR STANDS

900 SERIES FLOOR STANDS ON WHEELS

	Ref.	390904		
	Dimensions in mm	W 900 x D 560 x H 1804		Max. " 65
	Mounting interface	L&S 5		Max. 60
	Nett weight	40 Kg		
	Ref.	390905		
	Dimensions in mm	W 900 x D 560 x H 1812		Max. " 65
	Mounting interface	L&S 5		Max. 60
	Nett weight	51 Kg		
	Ref.	390974	FS-974V6	
	Dimensions in mm	W 900 x D 560 x H 1804	W 900 x D 560 x H 1804	Max. " 65
	Mounting interface	L&S 5	VESA 200, 400, 600	Max. 60
	Nett weight	45 Kg	L&S 5	
	Ref.	390975	FS-975V6	
	Dimensions in mm	W 900 x D 560 x H 1812	W 900 x D 560 x H 1812	Max. " 65
	Mounting interface	L&S 5	VESA 200, 400, 600	Max. 60
	Nett weight	56 Kg	L&S 5	

900 SERIES FLOOR MONITOR STANDS

	Ref.	390922		
	Dimensions in mm	W 900 x D 560 x H 466		Max. " 55
	Mounting interface	L&S 5		Max. 60
	Angle adjustment	30° up to 60°		
	Ref.	390920		
	Dimensions in mm	W 900 x D 560 x H 466		Max. " 55
	Mounting interface	L&S 5		Max. 60
	Angle adjustment	30° up to 60°		

900 SERIES FLOOR MONITOR STANDS ON WHEELS

	Ref.	390923		
	Dimensions in mm	W 900 x D 560 x H 593		Max. " 55
	Mounting interface	L&S 5		Max. 60
	Angle adjustment	30° up to 60°		
	Ref.	390921		
	Dimensions in mm	W 900 x D 560 x H 599		Max. " 55
	Mounting interface	L&S 5		Max. 60
	Angle adjustment	30° up to 60°		

900 SERIES FLOOR STANDS

900 SERIES (TEMPORARILY) VIDEO WALL FLOOR STAND

**Ref.****390925**

Dimensions in mm

W 900 x D 700 x H 2724

Mounting interface

L&S 5

Nett weight

60 Kg

**3 x**

LARGE SCREEN FLOOR STAND

**Ref.****FS-V600**


Dimensions in mm

W 1077 x D 733 x H 2004

Max. presentation height in mm

1625 (centre screen)

Mounting interface

VESA 400 x 200,
VESA 400 x 400,
VESA 600 x 200 and
VESA 600 x 400▲ **Continuous height adjustment**

LARGE SCREEN FLOOR STAND ON WHEELS

**Ref.****FSW-V600**


Dimensions in mm

W 1077 x D 733 x H 1995

Max. presentation height in mm

1625 (centre screen)

Mounting interface

VESA 400 x 200,
VESA 400 x 400,
VESA 600 x 200 and
VESA 600 x 400▲ **Continuous height adjustment**

ACCESSORIES

MOUNTING BRACKETS FOR FLAT PANELS (SEE PAGE 60 FOR THE FULL PROGRAM)



Mount any brand and type of flat panel on any Audipack system with the Audipack mounting brackets.



UPRO series



Brand related mounts



VESA mounts

900 SERIES FLOOR STANDS

900 SERIES FLOOR STANDS

AUDIO SOLUTIONS



For every flat panel a made to measure soundbar is available. See chapter "Audio solutions" page 3 for more information

CAMERA/LAPTOP SUPPORT

Ref. Max. dimensions equipment in mm	390931 W 200 x D 250	390915 W 300 x D 250	390916 W 450 x D 350

EQUIPMENT CABINET

Ref. Max. dimensions equipment in mm	EC-935 W 440 x D 380 x H 110	EC-936 W 440 x D 380 x H 80


LAPTOP HOUSING

Ref. Max. dimensions equipment in mm	390937 W 400 x D 350 x H 55

EQUIPMENT HOUSINGS

Housing for Mac Mini, universal media player, Barco clickshare mini

Mounting interface: L&S 5




Ref.
Max. dimensions equipment in mm

EC-1
W 200 x D 48 x H 200

EC-1WLD (Wieland connection)
W 200 x D 48 x H 200

900 SERIES FLOOR STANDS

FLOOR PLATE FOR QUICK RELEASE STANDS



Ref.



FMP-971

Ideal for installing underneath carpet, attached with screws to the floor.



PORTRAIT/LANDSCAPE ADAPTER



Ref.

Manual left and right rotation



"use in combination with UFPRO mounting brackets"

P3496



MOUNTING HEAD



Ref.

Excluding:
numeric lock Ref.

230052



390951



390955

VIDEO CONFERENCE MOUNTING HEAD



Ref.

Maximum screen width

390940
720 - 1100390947
910 - 1510

VIDEO WALL CONNECTOR BAR, SET OF 2



Ref.

Length in mm

390928
785-1330

More "Video wall solutions"
check page 55



900 SERIES FLOOR STANDS

FLIGHTCASE TOP LOADER FOR DIVIDABLE 900 SERIES FLOOR STANDS



Stackable, perfect for dry-hire!



Ref.
Suitable for

FC-FS-901T
1x 390901

FC-FS-902T
1x 390902

FC-FS-921T
1x 390921

FCFS-4042W
390901
and 40-42" screen

FCFS-4650W
390901
and 46-50" screen

FCFS-5255W
390901
and 52-55" screen



Video wall 900 series, for more information see pag 25, ref. 390925

1000 series

Flat panel floor stands

The 1000 series Flat panel floor stands

The most stylishly designed flat panel floor stand in the world.



Just *that extra* little bit of *class*



Ideal for your reception area or just for extra 'wow' during your presentation.

The Audipack 1000 series flat panel floor stands for screens up to 90 inch.

The 1000 series stands out with its high finish level and class. The floor support comprises a high gloss black floor plate and a sturdy but stately rectangular column.

Combined with the Audipack flat panel monitor installation brackets, it offers a minimalistic look.

Available for 32-65" and 65-90" screen sizes.

To install your flat panel to an Audipack product an additional flat panel bracket is needed.

See "Mounting brackets for flat panels" section on page 45 for an overview of the available brackets.

- ▲ **High quality finishing**
- ▲ **Invisible cable management**
- ▲ **Portrait or landscape flat panel positioning**
- ▲ **Custom built models available**



Optional: EC-1 or EC-1WLD (incl. 3-way power strip F, CEE 7/4) Equipment holder



Easy player access




Neatly finished back side

1000 SERIES FLOOR STANDS




L&S 5

Ref.	391000
Dimensions in mm	W 735 x D 470 x H 1840
Presentation height in mm (centre screen)	1550, 1600 or 1650
Mounting interface	L&S 5
Max. equipment in mm	W 145 x D 60 x H 250
Nett weight	39 Kg



Ref.	391001
Dimensions in mm	W 800 x D 560 x H 1840
Presentation height in mm (centre screen)	1550, 1600 or 1650
Mounting interface	L&S 5
Max. equipment in mm	W 145 x D 60 x H 250
Nett weight	45 Kg



Height adjustable floor stands

Height adjustable floor stands

The all-in-one solution for transporting and lifting your larger flat panels up to 120 Kg.



Automatically* raise your large screen** ***out of the flightcase


The perfect rental solution for large and heavy screens

These dividable floor stands create a compact system that can be easily transported together with a flat panel, all in one flight case.

The simple to assemble parts create a rigid and pleasing floor stand that lifts the flat panel effortlessly out of the flight case and raises it up to the presentation position – all automatically. Ideal for large and heavy screens, including touch screens.



- ▲ **Suitable for screens up to 120 Kg.**
- ▲ **Flexible height adjustment**
- ▲ **Rigid construction**
- ▲ **No tools needed**



FS-QR120E



Mounting interface: VESA 400x200, 400x400, 600x200, 600x400 and L&S5 + Multi-VESA

FS-QR120E



Lockable VESA mounting patterns

390966



Manual version available

HEIGHT ADJUSTABLE FLOOR STANDS

ELECTRIC HEIGHT ADJUSTABLE FLOOR STAND

**Ref.****FS-QR120E**

Dimensions in mm

W 1130 x D 610 x H 2198

Presentation height in mm

700-1800 (centre screen)

Mounting interface

VESA 400 x 200, 400 x 400,
600 x 200, 600 x 400 and L&S 5

Optional

Flightcase

*Lift any screen up to 120 Kg out of the flightcase!*

The **FS-QR120E** is used in combination with a separate available Audipack flightcase. For each available screen size Audipack has created a flightcase that contains the **FS-QR120E** and the flat panel.

See next page for flightcases for FS-QR120E

Build-up the FS-QR120E (all parts are in the flightcase)

Turn the flightcase around and connect the screen to the FS-QR120E mounting head

Move the flightcase and electrically lift your screen to presentation height straight out the flightcase without personal lifting.



MANUAL HEIGHT ADJUSTABLE FLOOR STAND - 900 SERIES STACK-LIFT

**Ref.****390966**

Dimensions in mm

W 900 x D 662 x H 2700

Presentation height in mm


2350 (center screen)

Mounting interface

L&S 5

Optional

Flightcase

*Lift any screen up to 60 kg out of the flightcase!***Ref.****390968**

Dimensions in mm

W 900 x D 662 x H 2000

Presentation height in mm


1700 (center screen)

Mounting interface

L&S 5

Optional

Flightcase

*Lift any screen up to 60 kg out of the flightcase!*

Safety first! The **390966** and **390968** stack lift requires a yearly obligated safety check-up NEN-EN-ISO 12100:2010NL

Build-up the Stack-Lift (all parts are in the flightcase)

Turn the flightcase around and connect the screen to the Stack-Lift mounting head

Move the flightcase and manually lift your screen to presentation height straight out the flightcase without personal lifting.

See next page for flightcases for 390966 and 390968



ACCESSORIES

MOUNTING BRACKETS FOR FLAT PANELS (SEE PAGE 60 FOR THE FULL PROGRAM)



Mount any brand and type of flat panel on any Audipack system with the Audipack mounting brackets.



UFPRO series



Brand related mounts



VESA mounts

MOUNTING CAMS FOR DIRECT VESA MOUNTING

RECESSED MOUNTING HOLES



Ref.

392618
M6 x 13



392318
M8 x 13

390618
M10 x 13



392621
M6 x 35



392620
M8 x 35

LAPTOP SUPPORTS



Ref.
Max. equipment dimensions in mm

Suitable for 390966 and 390968



390915
W 300 x D 250

390916
W 450 x D 350



Suitable for FS-QR120E



P5355
W 450 x D 365



FLIGHTCASES



Ref.
Available for floor stand:

FC-FSQR-65
FS-QR120E + screen up to 65"

FC-FSQR-80
FS-QR120E + screen 70" up to 80"

FC-FSQR-100
FS-QR120E + screen 90" up to 100"

Ref.
Available for floor stand:

FC-SL-65
390966 + screen up to 65"

FC-SL-75
390968 + screen 60" up to 75"



FC-SL-90
390968 + screen 80 up to 90"

All-in-one Trolley

for Flat panels

The FSW-Atlas presentation trolley

the all-in-one presentation trolley equipped with integrated audio, data, video connections and power sockets.

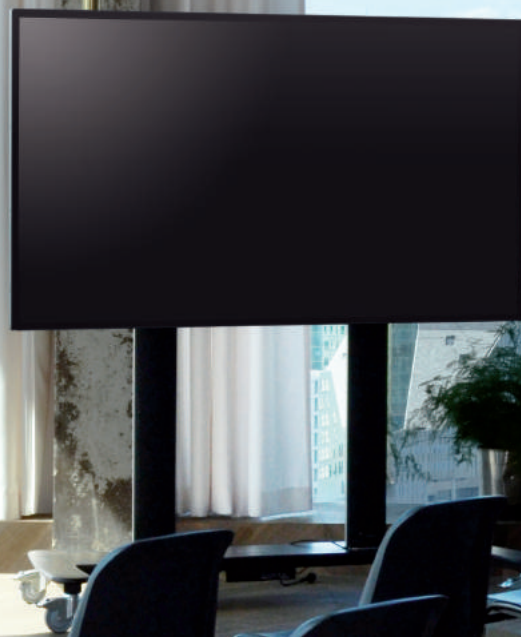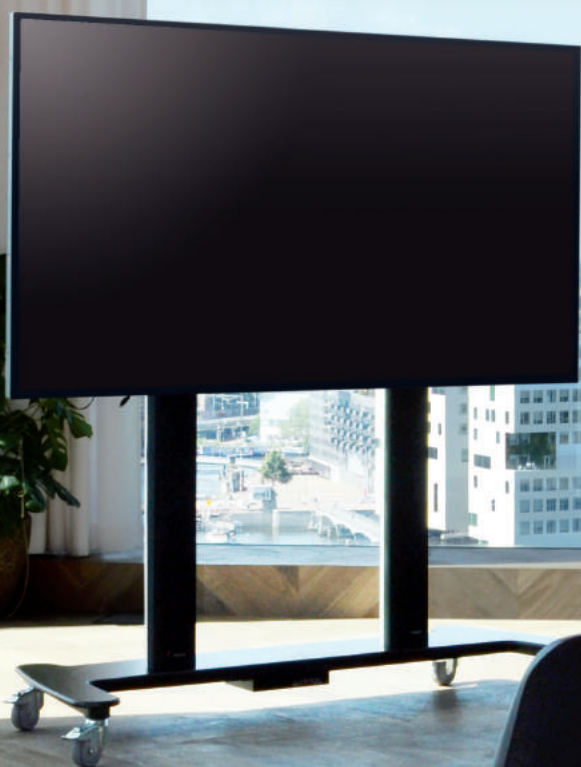

Total solution in one

Presentation trolley



The FSW-Atlas, a total solution in one presentation trolley; the easiest way to set up your mobile presentation.

The Audipack FSW-Atlas makes it easy for you. The Atlas trolley is an all-in-one trolley with invisible integrated audio in the column. In addition, there's also a 3-fold power strip integrated for connecting the monitor and optional equipment.

In the wheel frame of the trolley you will find a PowerCON power connection, RJ45, HDMI and space for extra connections. With a Lock & Secure 5 mounting bracket, the screen is easily installed. The screen height is adjustable in several different positions.

For installing additional equipment such as mini pc's and wireless presentation equipment, Audipack provides several brackets, even with integrated power distribution.

- ▲ **Lockable wheels**
- ▲ **Easy equipment installation**
- ▲ **Powercon power, HDMI and RJ45 in wheelframe**
- ▲ **Integrated 3-fold power strip F, CEE 7/4**
- ▲ **Portrait or landscape flat panel positioning**
- ▲ **Integrated Audio elements**



To install your flat panel to the Audipack FSW-Atlas, an additional flat panel bracket is needed.

See "Mounting brackets for flat panels" section on page 47 for an overview of the available brackets.



Built-in speakers 2 x 30 Watt



Integrated 3-fold power strip to easily connect equipment



Source and various connections in wheel frame

ALL-IN-ONE TROLLEY

ALL-IN-ONE TROLLEY

**Ref.****FSW-ATLAS**

Dimensions in mm	W 976 x D 685 x H 1960
Presentation height in mm (<i>centre screen</i>)	1480 - 1590 mm
Mounting interface	L&S 5
Nett weight	31 Kg
Colour	Anodized aluminium, Black RAL 9005 or white RAL 9016
Max. audio output	2 x 30 Watt at 8 Ohm
Frequency	70 Hz - 20 KHz

**Ref.****FSW-ATLAS-XL**

Dimensions in mm	W 1789 x D 763 x H 1977
Presentation height in mm (<i>centre screen</i>)	1400 - 1613 mm
Mounting interface	L&S 3 & 5, VESA 400, 600
Nett weight	75 Kg
Colour	Anodized aluminium, Black RAL 9005 or white RAL 9016
Max. audio output	2 x 30 Watt at 8 Ohm
Frequency	70 Hz - 20 KHz



MOVE-IT



Ref.

Dimensions in mm
Mounting interface
Max. screen height
Max. screen weight
Max. screen power consumption
Internal charger
Battery

Move-It 4655-200,

W 440 x D 456 x H 1136
VESA 400x400 & 400x600
1300mm
30 Kg
150 watt
20A
Internal safe Lithium-ferro 200 AH battery with battery management system. Battery life 10 hours at 125 watt consumption.

ACCESSORIES

MOUNTING BRACKETS FOR FLAT PANELS (SEE PAGE 60 FOR THE FULL PROGRAM)



Mount any brand and type of flat panel on any Audipack system with the Audipack mounting brackets.



UPRO series




Brand related mounts



VESA mounts

MOUNTING CAMS FOR DIRECT VESA MOUNTING



Ref.

392618
M6x13



392318
M8x13

390618
M10x13

FOR RECESSED MOUNTING HOLES



392621
M6x35



392620
M8x35

EQUIPMENT HOUSINGS

Housing for Mac Mini, universal media player, Barco clickshare mini

Mounting interface: L&S 5



Ref.

Max. dimensions equipment in mm

EC-1
W 200 x D 48 x H 200



EC-1WLD (Wieland connection)
W 200 x D 48 x H 200

Height adjustable Trolleys

for Flat panels



Height adjustable Trolleys



- ▲ Lockable wheels
- ▲ Easy equipment installation
- ▲ Durable, well designed and slim constructions
- ▲ Safe and secure

Height adjustable trolleys, designed for flat panels and touch screens.

Flexible, durable and rigidly constructed these trolleys are an ideal solution for the education market.

Fit any (touch)screen to the trolley and with the optional Audipack audio solutions the total set-up is clean and well finished.

Audipack designs and manufactures in privately owned design studios and factories, so we can customise the system to suit individual customer's needs. We use our own durable materials that are easy to clean and highly scratch resistant.



ELECTRIC HEIGHT ADJUSTABLE DOUBLE COLUMN TROLLEY



Ref.

DFS-120E

Dimensions in mm	W 1400 x D 797 x H 1950
Nett weight in Kg	53
Presentation height in mm	700-1580 (centre screen)
Mounting interface	VESA 400x200, 400x400, 600x200, 600x400 and L&S5
Power supply	230 VAC 50-60 Hz



Mounting interface: VESA 400x200, 400x400, 600x200, 600x400 and L&S5



Lockable VESA mounting patterns



Electric control panel

PRESENTATION TROLLEYS FOR FLAT PANELS

ELECTRIC HEIGHT ADJUSTABLE TROLLEY



Ref.	FSW-T100V6
Dimensions in mm	W 739 x D 650 x H 1175-1835
Presentation height in mm	940-1600 (centre screen)
Mounting interface	VESA 200, 300, 400, 600 and L&S 5
Power supply	230 VAC 50-60 Hz



Ref.	FSW-T100V8
Dimensions in mm	W 939 x D 650 x H 1175-1835
Presentation height in mm	940-1600 (centre screen)
Mounting interface	VESA 200, 300, 400, 600, 800 and L&S 5
Power supply	230 VAC 50-60 Hz



TROLLEY STAND FOR TOUCH SCREENS UP TO 150 Kg



Ref.	FSW-T160B	FSW-T160B-XL
Dimensions in mm	W 1090 x D 716 x H 1255-1755	W 1090 x D 716 x H 1108-1848
Presentation height in mm	940 - 1440 (centre screen)	903 - 1643 (centre screen)
Mounting interface	Up to VESA 800x600	Up to VESA 800x600
Power supply	230 VAC 50-60 Hz	230 VAC 50-60 Hz

Includes wired hand control



Ref.	FSW-T160BT
Dimensions in mm	W 1090 x D 716 x H 993-1493
Presentation height in mm	788 - 1288 (centre screen, vertical)
Mounting interface	Up to VESA 800x600
Power supply	230 VAC 50-60 Hz

Includes wired hand control

**Optional:****FSS-160-LTS:**

Laptop shelf for FSW-T160B, FSW-T160-XL, FSW-T160BT.
Also suitable for FSL-160E & FSL-160E-XL. see page 89
for more info.

ELECTRIC HEIGHT ADJUSTABLE TOUCH TABLE



Ref.	FSW-Touch6065
Dimensions in mm	W 1106 x D 768 x H 968-1643
Nett stroke in mm	675
Presentation height in mm	1418
Max. mounting range in mm	W 810 x H 671
Mounting interface	Up to VESA 800x600
Angle adjustment in degrees	-5 - 95
Power supply	230 VAC 50-60 Hz



Ref.	FSW-Touch4055R(electric rotation)
Dimensions in mm	W 949 x D 768 x H 760-1435
Nett stroke in mm	675
Presentation height in mm	1418
Max. mounting range in mm	W 670 x H 446
Angle adjustment in degrees	-5 - 95 Electric tilt
Power supply	230 VAC 50-60 Hz



MOUNTING BRACKETS FOR FLAT PANELS



Mount any brand and type of flat panel on any Audipack system with the Audipack mounting brackets.



UFPRO series



Brand related mounts



VESA mounts

AUDIO SOLUTIONS



For every flat panel a made to measure soundbar is available. See chapter "Audio solutions" page 3 or more information

MOUNTING CAMS FOR DIRECT VESA MOUNTING

FOR RECESSED MOUNTING HOLES



Ref.



392618
M6x13

392318
M8x13

390618
M10x13



392621
M6x35



392620
M8x35

LAPTOP SUPPORT (SUITABLE FOR DFS-120E)



Ref.
Max. equipment dimensions in mm



P5355
W 450 x D 365



COVER PLATE (SUITABLE FOR DFS-120E)



Ref.

"Soft edge finishing"
ergonomic protection



DFS-CP



PC CABINET (SUITABLE FOR FSW-T100)



Ref.
Max. equipment dimensions in mm



EC-7
W 180 x D 514 x H 390



PEN TRAY (SUITABLE FOR FSW-T100)



Ref.



FSW-PT1



Mobile video wall

Display for Flat panels

The Mobile video wall display is a flexible solution that enables you to move your presentation to the desired location



MOBILE VIDEO WALL DISPLAY



The Mobile Video Wall Display is the flexible solution in comparison with a wall mounted or ceiling suspended video wall. The display is made on request and offers lots of possibilities.

As Basic model, Audipack supplies 3x3 and 4x4 configurations for screens of 46", 47", 55" and more. A rigid base frame with lockable wheels, aluminum powder coated frame (Black, RAL 9005) and high finishing grade.

Upgrade options:

- ▲ Column speaker 2 x 240 Watt
- ▲ Passive soundbar 2 x 60 Watt
- ▲ Electric height adjustment
- ▲ Active subwoofer
- ▲ Decor panel (to cover back of screens)
- ▲ Grill in order to cover the backside of screens

The electric height adjustment enables you to lower the video wall when moving the display to another location, or raise the video wall higher for a better view by the audience.

- ▲ ***Available for all screen sizes***
- ▲ ***High grade finishing***

Install the Audipack column speakers on both sides of the video wall for not only a perfect audio support for your presentation, but also for a neat side view finishing of the video wall. The vertical soundbars are customized to match the height of the video wall. The soundbar is customized to match the width of the video wall.

Please contact Sales for more information.



PROFILE SPEAKER SET (CUSTOM-BUILT)**Ref.**

Dimensions in mm
Max power
Connections
Colour

LSS-XXXXPR

W 147 x D 143 x H XXXX (height screen)
2 x 30 Watt RMS at 8 Ohm
wire connect & banana plug
Anodized aluminium with black or white speaker front



The Profile speaker set is a vertical orientated speaker set made to match the height of larger screens and videowalls. Internal speaker technology is based on the LSS/LST audio systems. The Profile speaker is installed on each side of the screen and is available in 2 x 30 Watt and 2 x 60 Watt or higher. Custom powered versions on request.

Check the Audipack website & price list for an updated product list.

ACTIVE SUBWOOFER**19" RACKING****BACK COVER****Ref.**

Max. power
Connection
Power supply

LSS-80SW

80 Watt
2 x cinch, wire connect & banana plug
100-230 VAC

**Ref.****19" racking**

Optional for Movable Video Wall Display
for installing equipment in cabinet.



Optional covering of back of the screens when Movable Video Wall Display is used as a room divider. Contact Sales for the possibilities.


Ref. FSW-VW-Backcover

Table stands and mounts

for Flat panels

The Audipack flat panel table stands,

highly flexible solutions for screens up to 50"

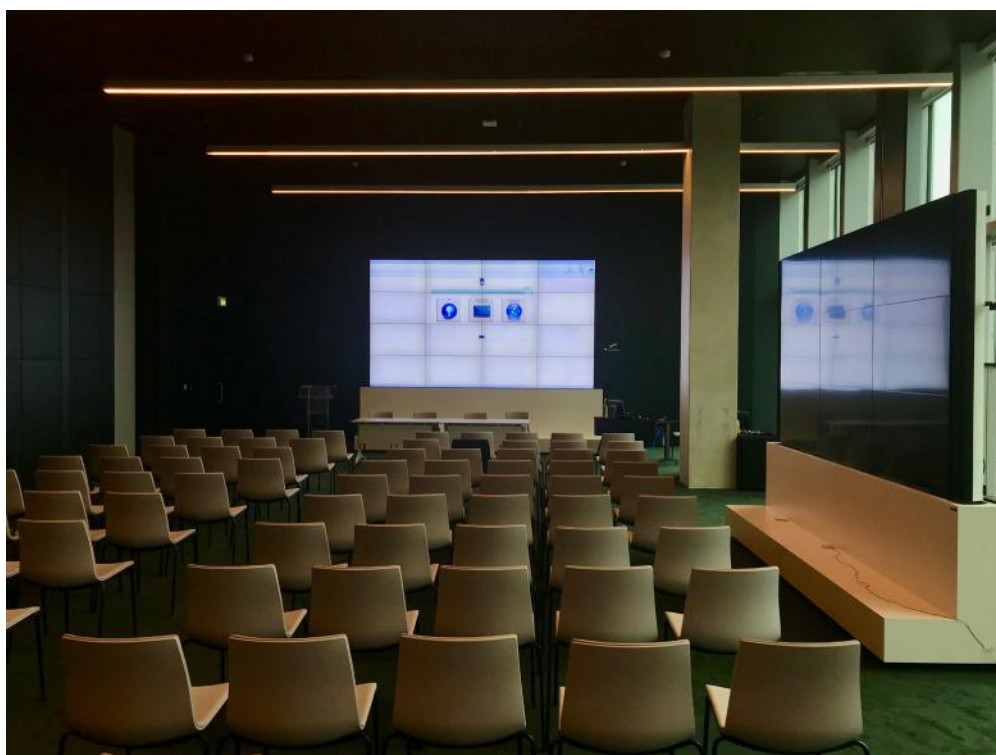

Audipack®

It's great to have solutions...

Free standing and low profile solution



The universal flat panel table stand is a solid, low profile, and freestanding presentation solution for flat panels up to 50 inch diagonal.

The discreet design of the product compliments any flat panel perfectly. These stands come equipped with the Lock&Secure mounting system.

To install your flat panel to an Audipack product, an additional flat panel bracket is needed.

- ▲ **Easy installation**
- ▲ **Discreet design**
- ▲ **2 height positions**
- ▲ **Rigid construction**
- ▲ **Vertical height adjustment**



The L&S 3 interface fits all Audipack mounting brackets



Easy mounting solution

TABLE STANDS AND MOUNTS



Ref.

390660

Dimensions in mm

W 490 x D 265 x H 539

Mounting interface

L&S 3

Max. screen height

ca. 700 mm (VESA in center)



Ref.

392551

Dimensions in mm

W 490 x D 265 x H 590

Mounting interface

L&S 3

Max. screen height

ca. 800 mm (VESA in center)



Ref.

DMV1-0500

Length in mm

500

Mounting interface

VESA 75 x 100




Video wall and Multi screen solutions

Create a video wall in any configuration...

The Audipack video wall mounting system is the most solid and adjustable system on the market.

Save time and money on the installation.

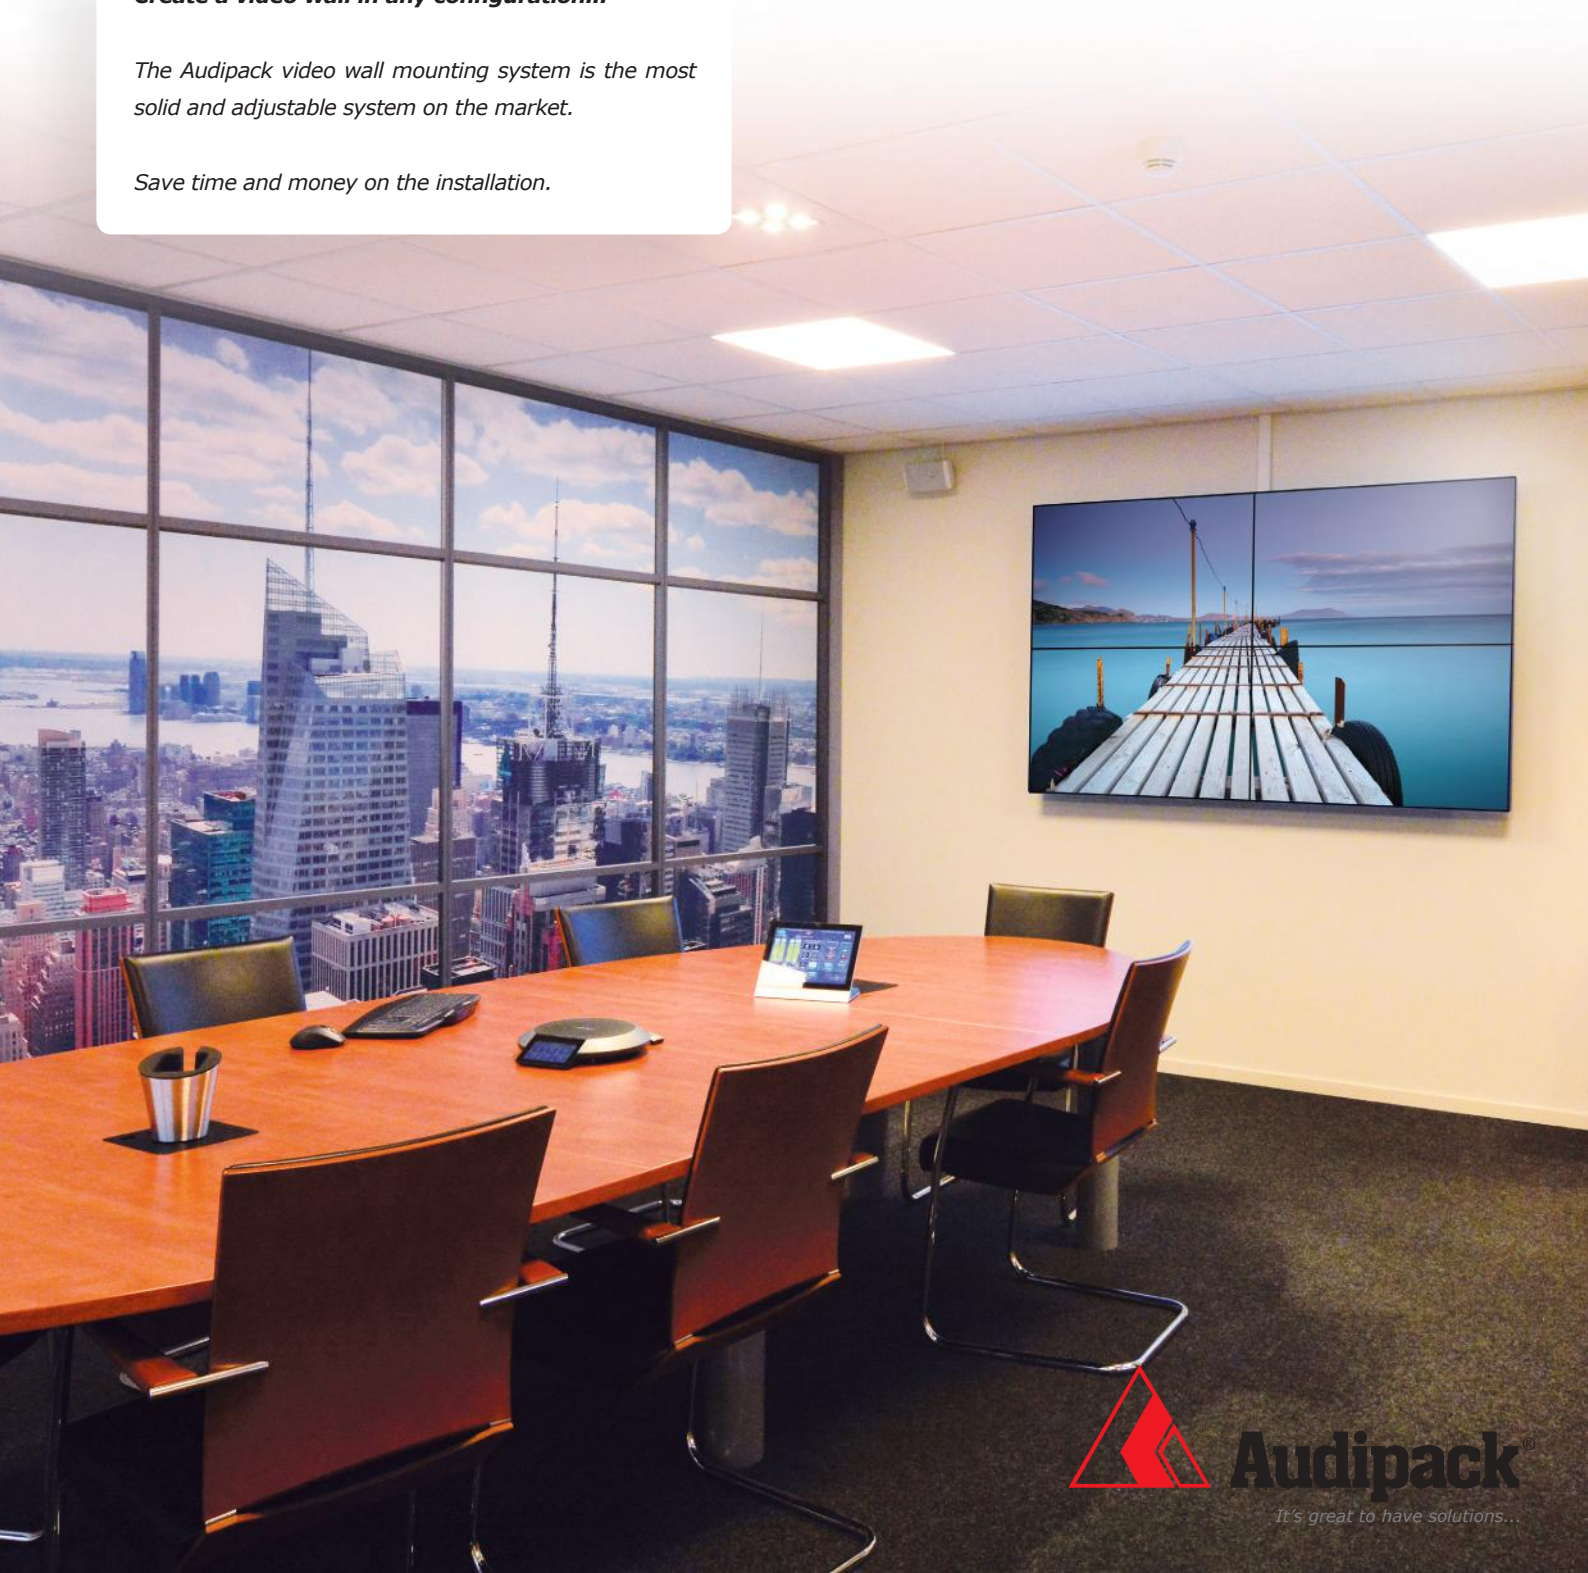

Audipack®

It's great to have solutions...

Create a **video wall** in any configuration

in next to **no time!**



Less effort for screen alignment perfection

Installing video walls with Audipack's installation systems saves time and money.

Audipack offers two systems:

VWM Basic system

The universal **VWM basic system** is a low cost, high value installation system that gives fast and precise installation.

The construction looks simple, but there is more than meets the eye. Each screen is separately adjustable when it is installed to the wall or rental flying frame.

The system copes easily with 2x2, 4x4 or even 8x4 configurations. With a simple addition of our screen installation cams, the screens are installed in an instant.

VWMS Serviceable system

The **VWMS serviceable system** is an impressive product that supports the installation of multiple screens on a wall whilst allowing individual screen access for servicing needs.

Each screen in the videowall can be pushed out from the wall, with the Push-to-Release system for service or repair. Simply push the screen back in when complete. The built-in adjustment feature means perfect alignment, even on a non-level wall.

The system copes easily with 2x2, 4x4 or even larger configurations. With a simple addition of our screen installation cams, the screens are installed in an instant.

BACK PLATES (BASIC SYSTEM)



Ref.	VWM-BPH-0800
Length in mm	800
Ref.	VWM-BPH-1000
Length in mm	1000

MOUNTING ARMS (BASIS SYSTEM)



Single vertical row
Video wall

Double vertical row
Video wall

Triple vertical row
Video wall

Screen sizes constantly change, visit our website for updated models and screen sizes

* For screens with non-centric placed VESA pattern

Ref.	MA-400	MA-2-46AS *	MA-3-46AS *
Max. screen size		H 576-593	H 576-593
Vertical VESA	300, 400	400	400

Ref.	MA-400	MA-2-46-V3	MA-3-46-V3
Max. screen size		H 578-608	H 578-608
Vertical VESA	300, 400	300	300

Ref.	MA-400	MA-2-55	MA-3-55
Max. screen size		H 684-714	H 684-714
Vertical VESA	300, 400	400	400

Ref.	MA-400	MA-2-60	MA-3-60
Max. screen size		H 754-784	H 754-784
Vertical VESA	300, 400	200	200

Ref.	MA-600	MA-2-46P
Max. screen size		H 1023-1084
Vertical VESA	400, 600	200, 400, 600

Ref.	MA-600	MA-2-55P
Max. screen size		H 1215-1275
Vertical VESA	400, 600	200, 400, 600



Upper screen position and
complete row height adjustment




Lower screen position &
offset adjustment

VIDEO WALL SYSTEMS

VIDEO WALL **PUSH TO RELEASE SYSTEM VOOR EASY SERVICE**Mounting head

Manually accessible, with Push to Release system

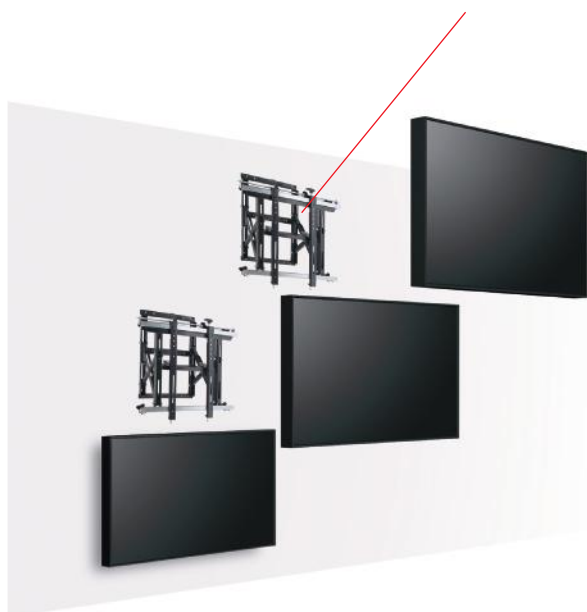


- ▲ **Short installation time due to "row installing"**
- ▲ **Push-to-Release system for easy flat panel access**
- ▲ **Compact offset dimensions (only) 80 mm**
- ▲ **Post-installation fine tuning of height and leveling for a seamless installation**
- ▲ **Standard multi-axis adjustable interface, extendable up to VESA 600 x 400**



A perfect aligned videowall, installed in a perfect time and all screens are serviceable. Those are the key elements of the VWMS videowall system. A system that installs with low effort featuring lots of alignment options in 6 axes, even when the wall is not finished well or is not perfectly level. The build-in 3D adjustment features deals with it all. Simply install the mounting heads with the use of the special installation ruler to the wall, mount the two brackets to the flat panel and hang the display on the mounting head. Align the display with the adjustment features.

PUSH TO RELEASE SYSTEM FOR EASY SERVICE**Ref.****VWM-MH3**


Dimensions in mm	W 560 x D 88 x H 550
Wall offset in mm	88
Nett weight	12 kg
Linear service travel in mm	290
Mounting interface	VESA 400
Optional	VESA 600 x 400, 800 x 400 (MH3-EV800)




- Post-installation fine tuning of height and leveling for a seamless installation;
- Post-installation lateral shift to easily slide screens apart or together for easy; maintenance and perfect alignment;
- Audible click when the screen safely engages with the mount;
- Fine-tuning adjustment in **6 axes** to ensure screens are perfectly vertical for a seamless install, to compensate for walls that are not perfectly flat;
- Push to Release for service access.

Ref.**VWM-MH4**

Dimensions in mm	W 560 x D 88 x H 550
Wall offset in mm	88
Nett weight	12 kg
Linear service travel in mm	290
Mounting interface	VESA 400
Optional	VESA 600 x 400, 800 x 400 (MH3-EV800)



- Never touch the screen. The VWM-MH4 **electric activated mounting head** is suitable for direct wall mounting. With the "electric release" mechanism the screen pops out of the videowall.
- The P7520 control unit, allows you to select and release, between multiple screens
- Post-installation fine tuning of height and leveling for a seamless installation;
- Post-installation lateral shift to easily slide screens apart or together for easy; maintenance and perfect alignment;
- Fine-tuning adjustment in **6 axes** to ensure screens are perfectly vertical for a seamless install, to compensate for walls that are not perfectly flat;

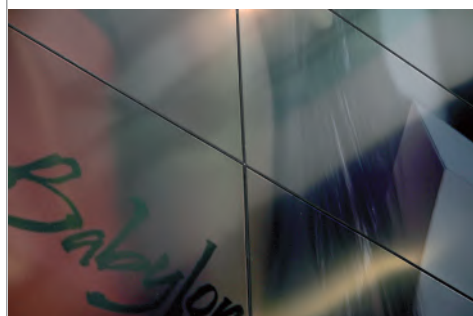

Perfect corner to corner
screen adjustment

ACCESSORIES

MOUNTING CAMS FOR MOUNTING ON BASIC SYSTEM

MOUNTING CAMS (RECESSED HOLES)

Cams to fill up recessed mounting holes.

Ref.

392618
M6 x 13

392318
M8 x 13

390618
M10 x 13

392621
M6 x 35

392620
M8 x 35

MOUNTING SET FOR VWM-MH3

Conversion set
from VESA 400
to 600, 800.


Adds 15 mm extra
wall offset (from 88
to 103 mm)



Ref

MH3-EV800

AUDIO SOLUTIONS



For every flat panel a made to measure soundbar is available. See chapter "Audio solutions" page 3 for more information

CONTROL UNIT FOR SELECTING AND ACTIVATING THE VWM-MH4

Ref.

P7520


Power supply:

24 volt

Channels:

16 (4x4 videowall or smaller)

Unit can be installed away from the videowall



UPGRADE SET FOR VWM-MH3 TO VWM-MH4

Ref.

P7521

Allows you to upgrade a VWM-MH3 to a VWM-MH4. The P7520 control unit is required for selecting and activating your VWM-MH4 unit.

Wall mount solutions

for flat panels

The Audipack wall mounts,

are a range of products that offer perfect solutions for Pro AV use or permanent installations.



Flexible, strong and Innovative!



The **Professional temporarily AV wall mounts** are specifically designed for professional installations. The special Lock&Secure mounting interfaces guarantees a quick installation and panel switch if required. Especially suitable for projects, public places, convention centres etc. To install your flat panel to an Audipack ProAV wall mount an additional flat panel bracket is needed.

- ▲ **Fast and easy installation**
- ▲ **Quick flat panel installation and removal**
- ▲ **Theft delay**
- ▲ **Very rigid design**



Screw cup detail ®



Flexible mounting range

The strongest and most innovative solutions for wall mounting screens

The Audipack **wall mounts** are specifically designed for quick and safe installations; see them as temporarily rental applications, or for permanent installations. Key benefits include durability, speed of installation and easy product access.

The **Universal wall mounts** offer a wide range for the safe and fast installation of flat panels. Durable, flexible and adjustable they offer the perfect solution for every screen. With the special build-in "align feature" drill mistakes can be solved easily.



(registered product)

A wide range of VESA and universal mounts is available. All our flat panels wall mounts are safe and easy to install and are available for flat panels up to 120 inch diagonal.

The professional wall mounts on the next pages are combined with L&S3 or L&S5 monitor brackets.



WALL MOUNTS

PERMANENT INSTALLATION - MULTI VESA

	Ref.	390838			
	Dimensions in mm	W 120 x D 22 x H 122			
	VESA	75 & 100			
	Ref.	390839			
	Dimensions in mm	W 120 x D 22 x H 162			
	VESA	75 & 100			
	Ref.	390840			
	Dimensions in mm	W 269 x D 28 x H 250			
	VESA	75, 100 & 200			
	2-POINT WALL MOUNT				
	Ref.	FWM-V402			
	Dimensions in mm	W 460 x D 21 x H 530			
	Max. mounting range in mm	W 400			
	Positioning	Landscape and portrait			
	Ref.	FWM-V600			
	Dimensions in mm	W 660 x D 21 x H 500			
	Max. mounting range in mm	W 600			
	Positioning	Landscape and portrait			

PERMANENT INSTALLATION - MULTI VESA

	<i>For Ultra thin LED screens</i>				
	Ref.	FWM-V400			
	Dimensions in mm	W 460 x D 12 x H 520			
	VESA width	200, 300 & 400			
	VESA height	200, 300 & 400			
	<i>Including flat panel installation materials</i>				
	Ref.	FWM-V900			
	Dimensions in mm	W 1004 x D 30 x H 966			
	Max. mounting range in mm	W 900 x H 600			
<i>Please refer to www.audipack.com for brand related large screen wall mounts</i>					

TILTABLE WALL MOUNT WITH EQUIPMENT CABINET BEHIND SCREEN

Inclusive Align® installation feature					
	Ref.	FWM-V400EC			
	Dimensions	W 605 x D 85 x H 480 mm			
	Max. range mounting points	W 470 x H 460 mm			
	Tilt adjustment in degrees	-15 / 0 / +15			
	Equipment cabinet behind screen				

PERMANENT INSTALLATION - PULL TO RELEASE - UNIVERSAL

	Ref.	FWM-V8SV			
	Max. mounting range in mm	W (free adjustable) x H 825 x			
	Depth in mm	flat 109, extended 320			
The FWM-V8SV is a heavy duty wall mount for large flat screens. By pulling the cords, the wall mount is released and comes forward to give access for service.					

PERMANENT INSTALLATION - UNIVERSAL



Ref.	392696	392698
Dimensions in mm	W 1550 x D 50 x H 800	W 1550 x D 50 x H 1290
Max. mounting range connected	W 1495 x H 740	W 1495 x H 1290
Max. mounting range open	W 2000 x H 740	W 3000 x H 1290



Ref.	392585
Dimensions in mm approx.	2 x W 139 x D 44 x H 830
Max. mounting range in mm	W 1500 x H 800



Heavy duty wall mount, easy to install.



Lock the bracket with the optional lock
Ref.: 230052(numeric)

Ref.	FWM-2688
Dimensions in mm	W 540 x D 60 x H 380
Max. mounting range in mm	W 470 x H 360
Min. mounting range in mm	W 80
Tilt adjustment in degrees	-10° / 0° / +10°



Ref.	FWM-2690
Dimensions in mm	W 740 x D 60 x H 500
Max. mounting range in mm	W 670 x H 446
Min. mounting range in mm	W 227,5
Tilt adjustment in degrees	-10° / 0° / +10°



Lock the bracket with the optional lock
Ref.: 230052(numeric)

Ref.	FWM-688
Dimensions in mm	W 530 x D 28 x H 400
Max. mounting range in mm	W 470 x H 360
Min. mounting range in mm	W 88



Ref.	FWM-690
Dimensions in mm	W 728 x D 28 x H 500
Max. mounting range in mm	W 670 x H 446
Min. mounting range in mm	W 174



Lock the bracket with the optional lock
Ref.: 230052(numeric)

Ref.	FWM-688P
Dimensions in mm	W 530 x D 28 x H 650
Max. mounting range in mm	W 470 x H 600
Min. mounting range in mm	W 88



Ref.	FWM-690P
Dimensions in mm	W 730 x D 28 x H 650
Max. mounting range in mm	W 670 x H 600
Min. mounting range in mm	W 174



SCREEN-CRAWLER (INSTALLATION AID)



The Screen-Crawler makes it possible to safely lift large screens, with a minimum of effort and less installers. You simply attach the screen with hoisting cables/bands to the hoist aid and hoist up the screen with the winch.

After placing the screen to the wall mount, you're done! With a WLL lifting capacity of 200 kg, it can handle mostly all big screens. It's easy to transport, due to its light weight.

Ref.	SC-190
------	--------

Max load	200 kg
Height (retracted)	1990 mm
Max. lift height (hook)	2900 mm



Optional: **P6611**, lifting aid with eyebolts for lifting loads with bands or chains (bands and chains not supplied)

- ▲ Complies with **NEN-EN-ISO 12100:2010NL**
- ▲ Yearly check-up required

Flat panel presentation board

Soundbar solutions,

the perfect quick-install all-in-one presentation solution.



Flat panel presentation board



The FBP series is a quick install wall mounted accessory to provide a compact and neatly organized presentation product for screens, audio and camera.

For small sized presentation solutions the FPB allows an easy installation. Just install the finishing board to the wall, the equipment in the monitor bracket and install the screen and camera.

Depending on the thickness of the extra equipment behind the screen, the screen distance to the panel can be adapted.

The FPB is standard equipped with space for an audio option and space for installing a VC camera.

The FPB boards are standard available in white, other colours or veneer on request available.

FLAT PANEL PRESENTATION BOARD WITH SOUNDBAR



Ref.	FPB-4046SB	
Panel dimensions in mm	W 1300 x H 800-875* x D 30-150	 
Wall offset	33 mm	
Max. screen size in mm	W 1190 x H 670 (aprox)	
Mounting interface in mm	Universal, max W 600 x H 400	
Max power	2 x 15 Watt	
		 
Ref.	FPB-5055SB	
Panel dimensions in mm	W 1350 x H 850-925* x D 30-150	 
Wall offset	33 mm	
Max. screen size in mm	W 1250 x H 750 (aprox)	
Mounting interface in mm	Universal, max W 600 x H 400	
Max power	2 x 15 Watt	
		 
Ref.	FPB-6065SB	
Panel dimensions in mm	W 1500 x H 900-975* x D 30-150	 
Wall offset	33 mm	
Max. screen size in mm	W 1400 x H 800 (aprox)	
Mounting interface in mm	Universal, max W 600 x H 400	
Max power	2 x 15 Watt	
		 

* Soundbar height add-on

Wall arms

for flat panels

Audipack flat panel swivelling wall arms;

a world standard in stability and ease of use.




Relax and enjoy the flexibility

Enjoy your flat panel from anywhere in the room.

Face the screen towards your kitchen, child's play area or your guests. The clean lines of the design negate the need for complex supports.

These extremely stable wall arms allow the flat panel to be set in any position. Their minimalistic looks and neat dimensions ensure the attention is focused on the screen rather than the wall arm. All cables are hidden in the arm itself, so unsightly wiring is out of sight.

Use the **Screen-Crawler** (SC-190) Installation Aid for safe installation of large, heavy screens. (See page 63)

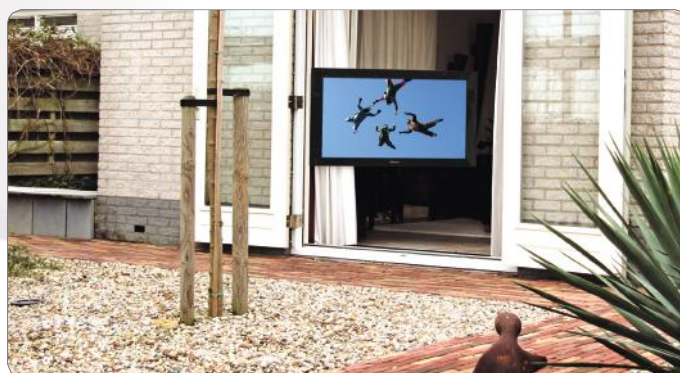

- ▲ **Rigid and safe construction**
- ▲ **Lockable in every position**
- ▲ **Very flexible in use**
- ▲ **Integrated cable duct in swing arms and wall plate**



All cables out of sight through the arm



Lockable in position



L&S 3 mounting interface

WALL ARMS


WALL ARMS ALL-IN-ONE PROJECT SOLUTION - UNIVERSAL

- ▲ **Swiveling wall arm, left/right orientation**
- ▲ **Universal mounting interface**
- ▲ **Integrated space for cables and equipment**

These wall arms have an integrated space for media player/pc and 3-way power strip (type F, CEE 7/4).



Ref.	FWA-500	FWA-700
Max. wall offset in mm	500	700
Mounting range	W 690 x H 446	W 690 x H 446
Mounting interface	Universal	Universal



Black version



Rear view




Integrated space for media player



Ref.	FWA-500i	FWA-700i
Max. wall offset in mm	500	700
Mounting range	W 690 x H 446	W 690 x H 446
Inclination angle	-10 / 0 / +10°	-10 / 0 / +10°
Mounting interface	Universal	Universal



WALL ARMS WITH L&S 3 + VESA



Ref.	390614
Dimensions in mm	W 801 x D 88 x H 310
Max. wall offset in mm	700
Nett weight	14 Kg
Mounting interface	VESA 75, 100 & 200 x 100



DOUBLE SWIVELLING WALL ARM WITH L&S 3 + VESA



Ref.

390695

Dimensions in mm

W 650 x D 115 x H 483

Max. wall offset in mm

1087

Nett weight

23 Kg

Mounting interface

VESA 75, 100 & 200 x 100



FLAT PANEL SWIVELING WALL ARM UP TO 120 KG



Ref.

FWA-120

Dimensions in mm

W 650 x D 115 x H 483

Max. wall offset in mm

1050

Nett weight

23 Kg

Max load

120 kg

Max screen size

aprox 120 inch

Mounting interface

L&S 5 for UFPRO mounts (be aware of load limit of brackets 80 kg)
170x170 M8/M10 brackets for large screens, load up to 120 kg



ACCESSORIES

MOUNTING BRACKETS FOR FLAT PANELS



Mount any brand and type of flat panel on any Audipack system with the Audipack mounting brackets.



UFP series



Brand related mounts



VESA mounts

Ceiling mounts

for flat panels

With flat panels becoming an increasingly important element of any professional install,

the installation speed, adjustability and stability of the accessories are important features.

Audipack introduces the new generation of ceiling mounts for flat panels.



Stylish and Professional!

Audipack's flat panel ceiling mounts are durable mounting solutions that allow height and angle adjustment of the flat panel.

The flat panel ceiling mounts are slim, discreet and suitable for any brand and type of panel. This product line enables quick installation and complements any installation. Flexible screen adjustment and neatly hidden cables within the tubes are standard features.

Fixed lengths and telescopic versions are available to position the screen perfectly for every height and location.

The colour of the mounting head is standard black RAL 9005

- **The CMV1 and CMV2 series** feature a new special ball-joint to easily direct and adjust the screen towards the viewer. This product line offers standard VESA 75, 100 and 200 mounting patterns.
- **The FCM and FCMD series** are durable and rigid product lines that offer flexibility for installing larger single or back-to-back screens. Perfect for pro AV installation projects.

With the standard available options it is very easy to adapt the ceiling mounts to meet your installation specifications.

The 800 series flat panel ceiling mounts are designed for installations with large screens installed onto high ceilings. The product stability allows a slim but long ceiling mount, hiding all cables and offering a continuous height adjustable mounting head with forward inclination.

With the Audipack Lock&Secure system the flat panel is easily mounted and quickly secured. Custom-made models are available in lengths up to 4 metres.

- ▲ **Telescopic models available**
- ▲ **Perfectly angle adjustment**
- ▲ **VESA and L&S 5 suited**
- ▲ **All cables hide through the tube**
- ▲ **VESA and L&S 5 in black**



Angle adjustment



Neatly installed cables



20° adjustment and standard lockable



Standard ceiling finishing on all models

CEILING MOUNTS

CMV1 SERIES: CEILING MOUNTS WITH VESA 75 & 100**Ref. CMV1-0300**

Length in mm	300
Tube diameter in mm	54
Tilt adjustment in degrees	0-27°

**Ref. CMV1-0500**


Length in mm	500
Tube diameter in mm	54
Tilt adjustment in degrees	0-27°

**Ref. CMV1-0800**

Length in mm	800
Tube diameter in mm	54
Tilt adjustment in degrees	0-27°

**Ref. CMV1-1000T**

Length in mm	604-1000 (Telescopic)
Tube diameter in mm	54-60
Tilt adjustment in degrees	0-27°

**CMV2 SERIES: CEILING MOUNTS WITH VESA 100 & 200****Ref. CMV2-0500**

Length in mm	500
Tube diameter in mm	54
Tilt adjustment in degrees	0-27°

**Ref. CMV2-0800**

Length in mm	800
Tube diameter in mm	54
Tilt adjustment in degrees	0-27°

**Ref. CMV2-1500T**

Length in mm	907-1500 (Telescopic)
Tube diameter in mm	54-60
Tilt adjustment in degrees	0-27°

**CMV4 SERIES: CEILING MOUNTS WITH VESA 200, 300 & 400****Ref. CMV4-0500**

Length in mm	500
Tube diameter in mm	54
Tilt adjustment in degrees	0-27°

**Ref. CMV4-0800**

Length in mm	800
Tube diameter in mm	54
Tilt adjustment in degrees	0-27°

**Ref. CMV4-1500T**

Length in mm	907-1500 (Telescopic)
Tube diameter in mm	54-60
Tilt adjustment in degrees	0-27°



CEILING MOUNTS

FCM SERIES: CEILING MOUNTS WITH L&S 5



5 point mounting system
Bracket is required for screen mounting (page 47)

**Ref. FCM-1000**

Length in mm	1000
Tube diameter in mm	54
Tilt adjustment in degrees	0-20°

**Ref. FCM-1500**

Length in mm	1500
Tube diameter in mm	54
Tilt adjustment in degrees	0-20°

**Ref. FCM-1500T**

Length in mm	909-1500 (Telescopic)
Tube diameter in mm	54-60
Tilt adjustment in degrees	0-20°




FCMD SERIES: BACK TO BACK SOLUTIONS



5 point mounting system
Bracket is required for screen mounting (page 47)

**Ref. FCMD-1000**

Length in mm	1000
Tube diameter in mm	54
Tilt adjustment in degrees	0-20°

**Ref. FCMD-1500**

Length in mm	1500
Tube diameter in mm	54
Tilt adjustment in degrees	0-20°

**Ref. FCMD-1500T**

Length in mm	909-1500 (Telescopic)
Tube diameter in mm	54-60
Tilt adjustment in degrees	0-20°



800 SERIES CEILING MOUNTS L&S 5

**Ref. FCM-800-1000**

Length in mm	1000
Tilt adjustment in degrees	0-15°
Optional lock	Numeric:230052
Optional ceiling finishing ring	CFR-800



5 point mounting system
Bracket is required for screen mounting

**Ref. FCM-800-XXXX CUSTOM-HEIGHT**

Length in mm	Custom, tot max. 3000 mm
Tilt adjustment in degrees	0-15°
Optional lock	Numeric:230052
Optional ceiling finishing ring	CFR-800



5 point mounting system
Bracket is required for screen mounting



CEILING MOUNTS


SQUARE CEILING MOUNT

**Ref.**

Dimensions in mm
Tilt adjustment in degrees
Mounting interface
Tube length

FCM4-XX

depends on dimensions flat screen
15
FWM - universal
available in several lengths,
order separately FCM4-XXXX



The FCM4 square ceiling mount is sturdy and easy to install. It supports four large flats screens. The FCM4 comes with a bracket to attach the tube to the ceiling. The FCM4-tube can be ordered in any size up to 3000 mm. The FCM4 is available for all screen sizes.

Order reference: **FCM4- XX(screen size)**

Tubes set and length custom available.

CUSTOM-MADE

ACCESSORIES

MOUNTING BRACKETS FOR FLAT PANELS



Mount any brand and type of flat panel on any Audipack system with the Audipack mounting brackets.



UFPRO series



Brand related mounts



VESA mounts

EQUIPMENT CABINET

**Ref.**

Max. equipment dimensions in mm

For above ceiling installation
Use with FCM, FCMD, CMV1, CMV2, CMV4

**EC-5**


W 350 x D 350 x H 100



CEILING MOUNTS

CEILING MOUNTS

EXTENSION TUBES



Diameter 54 mm.



Ref.

Length in mm
Length gain in mm

ET-1000

1000
940

ET-1500

1500
1440

ET-2000

2000
1940

ET-2500

2500
2440

TRUSS MOUNTS (Ø 50 MM TRUSS)



Ref.

Suitable for

TM-54

54 mm tubes

TM-54-200

Telescopic FCM-1500T, FCMD-1500T

TM-60 (Telescopic tube sets only)

60 mm tubes

Ceiling to floor solutions


for flat panels

The Audipack ceiling to floor solutions

A free standing and solid solution in any environment




Create a free standing solution...

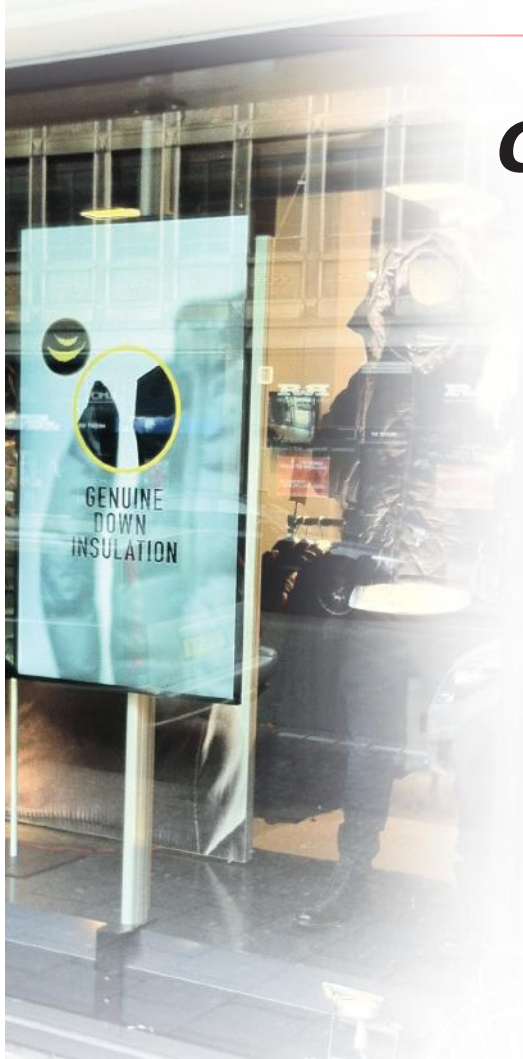

**The ceiling to floor solutions can be made in any length.
A perfect solution for any situation...**

Order explanation:

CTF-700D-3000

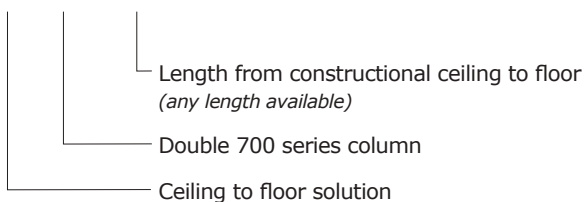

- ▲ **A free standing solution**
- ▲ **Rigid and flexible construction**
- ▲ **Single or multi-screen mounting**
- ▲ **Integrated cable duct all columns**

The ceiling to floor (CTF) and floor to wall (FTW) products are the ideal solutions for installing flat panels in a free standing position in a room or when a wall is too weak constructed to hold a rather large (touch) screen. The CTF and FTW products are manufactured from modern designed aluminium profiles with an integrated cable duct. For each application a choice, that's why Audipack offers 3 different contour shaped profiles.

Your choices:

The 700 series is the slimmest model which can be used in a single and double version. With its detachable cable duct covers it offers a slim but strong presentation solution.



700 series

The 800 series is a mid-size profile with 2 cable ducts and suitable for mid to large sized LED screens. The screens can be installed along the length of the column.



800 series

The 900 series is the most rigid and strong column. It's strong enough to hold the heaviest screens and rigid enough to handle the longest lengths. With its large internal cable duct the best solution for multiple screen installations like videowalls.



900 series

Choose your interface.

The FS series is available with 2 different screen interfaces.

The L&S 5 is the Audipack's AV cross rental solution with a wide variety of installation options on the job. The Multi-Vesa solution is a very cost effective mounting interface based on the Vesa mounting pattern on the screen. With mounting cams the screen can easily be locked in the mounting head.



Mounting interface: L&S 5



Multi functional mounting interface:
Multi-Vesa 400x400, 600x400, L&S 3, L&S 5

To install your flat panel to an Audipack product an additional flat panel bracket is needed.

CEILING TO FLOOR SOLUTIONS

CEILING TO FLOOR SINGLE 700

**Ref. CTF-700**

Standard length	2700 mm (max. 5000 mm)
Column size	60 x 110 mm
Max. load (approx)	1 x 50, 2 x 40, 3 x 30 Kg
Mounting interface	L&S5 - Multi-Vesa
Cable duct	2 removable covers

Bracket is required for screen mounting

CEILING TO FLOOR DOUBLE 700

**Ref. CTF-700D**

Standard length	2700 mm (max. 5000 mm)
Column size	2 x 60 x 110 mm
Max. load (approx)	1 x 60, 2 x 50, 3 x 30 Kg
Mounting interface	L&S5 - Multi-Vesa
Cable duct	4 removable covers

Bracket is required for screen mounting

CEILING TO FLOOR SOLUTIONS

FLOOR TO WALL SINGLE 700

**Ref. FTW-700**

Standard length	2000 mm (max. 5000 mm)
Column size	60 x 110 mm
Max. load (approx)	1 x 50, 2 x 40, 3 x 30 Kg
Mounting interface	L&S5 - Multi-Vesa
Cable duct	2 removable covers

Bracket is required for screen mounting

CEILING TO FLOOR SINGLE 800

**Ref. CTF-800**

Standard length	2700 mm (max. 5000 mm)
Column size	125 x 60 mm
Max. load	85 Kg
Mounting interface	L&S5 - Multi-Vesa
Cable duct	hinged door


Bracket is required for screen mounting

CEILING TO FLOOR SINGLE 900

**Ref. CTF-900**

Standard length	2700 mm (max. 5000 mm)
Column size	183 x 91 mm
Max. load	2 x 85 Kg
Mounting interface	L&S5 - Multi-Vesa
Cable duct	hinged door

Bracket is required for screen mounting

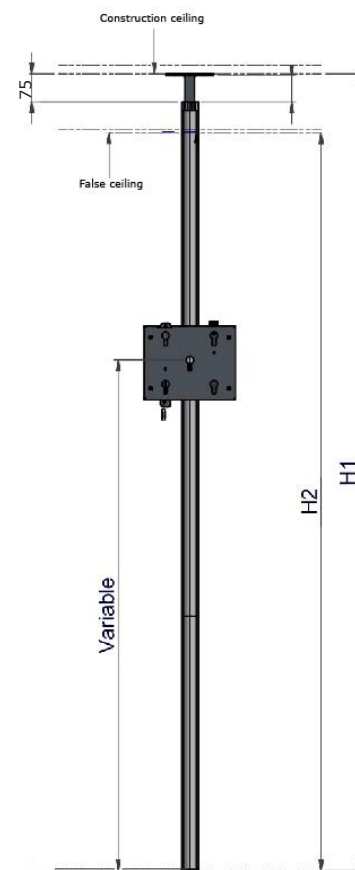

For ordering custom length CTF, please provide dimensions H1 and H2

Ceiling to Floor with integrated Audio



Permanent presentation solution with integrated audio.

The CTF-Atlas is a unique ceiling to floor solution for your flat panel up to 65 inch.
The secret of this presentation solution is the integrated audio feature of 2 x 30 Watt in the vertical column.
A LED screen can be installed via the L&S5 mounting interface and with an equipment holder EC-1 or EC-1WLD (optional) a Mac mini, mini PC or Barco Click- Share mini can be applied.

The CTF- ATLAS has a standard length that can be shortened if needed. Other lengths can be ordered custom-made to fit the specific ceiling height.

- ▲ Easy equipment installation
- ▲ Portrait or landscape flat panel positioning
- ▲ Integrated passive audio




Built-in speakers

CEILING TO FLOOR SOLUTION AUDIO




Ref.	CTF-ATLAS
Dimensions in mm	W 147 x D 143 x H 2700*
Suitable for ceiling height in mm	H 2716 - 2830
Presentation height in mm	1600-1900 (centre screen)
Mounting interface	L&S 5
Colour	Anodized Aluminium / black speaker front
Max power	2 x 30 Watt at 8 Ohm
Frequency	70 Hz - 20 KHz

*Custom lengths can be ordered to fit the specific ceiling height.



Ref.	CTF-ATLAS-XL
Dimensions in mm	W 955 x D 145 x H 2708*
Suitable for ceiling height in mm	H 2716 - 2830
Presentation height in mm	1800-2000 (centre screen)
Mounting interface	L&S 3 & 5, VESA 600 x 500/400, 400 x 500/400
Colour	Anodized Aluminium / black speaker front
Max power	2 x 30 Watt at 8 Ohm
Frequency	70 Hz - 20 KHz

*Custom lengths can be ordered to fit the specific ceiling height.



CEILING TO FLOOR SOLUTIONS

ACCESSORIES**MOUNTING BRACKETS FOR FLAT PANELS**

Mount any brand and type of flat panel on any Audipack system with the Audipack mounting brackets.



UFPRO series



Brand related mounts



VESA mounts

AUDIO SOLUTIONS

Interface for Soundbar
Ref.



700 series single
LSS-FS700



700 series double
LSS-FS700D

800 series
LSS-FS800


900 series
LSS-FS900

*For every flat panel a made to measure soundbar is available.
See chapter "Audio solutions" page 3 for more information*

EQUIPMENT HOUSINGS

Housing for Mac Mini,
universal media player,
Barco clickshare mini

Mounting interface:
L&S 5



Ref.
Max. dimensions equipment in mm

EC-1WLD (Wieland connection)
H 200 x B 200 x D 48

Column mounts

for flat panels

The Audipack column mounts for flat panels

are the most flexible solution for mounting onto pillars or columns



Audipack®

It's great to have solutions...



COLUMN MOUNTS

Stylish and Professional!



Order explanation:

FKM-0400B

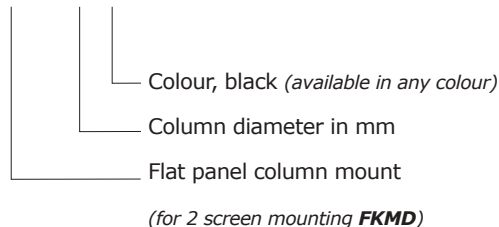

Available for multiple screen mounting



Available for multiple screen mounting

Audipack column mounts are ideal for installing flat panels onto round or square columns.

The metal clamp gives a flexible and secure method of mounting that does not undermine the column's strength. All Audipack Lock&Secure mounts can be used in conjunction with this product.

These mounts are custom made to the client's order. They are available in difference diameters for single or multiple flat panel installation.

A slim and solid solution for all situations. No drilling needed.

To install your flat panel to an Audipack product an additional flat panel bracket is needed.

See "Mounting brackets for flat panels" section on page 47 for an overview of the available brackets.

Check www.audipack.com for an updated product range

- ▲ **Does not affect constructional column strength**
- ▲ **Clamping installation**
- ▲ **Custom made for any situation**
- ▲ **Standard colour black RAL 9005**

STANDARD COLUMN MOUNTS



Standard column mount
FKM-2050 & FKM-5080

Ref.	FKM-2050
Mounting interface	Adjustable clamp with L&S5 mount
Max. load	60 Kg
Colour	Black RAL 9005, stainless steel clamp
Column diameter	200-500 mm

Ref.	FKM-5080
Mounting interface	Adjustable clamp with L&S5 mount
Max. load	60 Kg
Colour	Black RAL 9005, stainless steel clamp
Column diameter	500-800 mm

Truss mounts

for flat panels

The Audipack truss mounts for flat panels are

a sturdy solution for mounting flat panels to truss constructions.



Audipack®

It's great to have solutions...

TRUSS MOUNTS

Install flat panels to a *truss* *safely and quickly*



There is no easier way to mount flat panels to a truss than with one of the Audipack truss mounting solutions.

Audipack offers a range of flexible products that feature safety and speed as key elements. The low risk way to mount the flat panels with the minimal use of tools and external materials.

A fixed mount is available which is directly mounted to the truss. This product line is available with varying lengths of tubes for total flexibility.

To install your flat panel to an Audipack product an additional flat panel bracket is needed.

Stainless steel security cable: **399941**



800 SERIES TRUSS MOUNTS L&S 5



Ref.	FTC-800-XXXXB
Length in mm	custom
Truss diameter in mm	50
Tilt adjustment in degrees	0-15°
Rotation truss mount in degrees	-30-30°
Mounting interface	L&S 5
Optional	numeric lock Ref.: 230052



TRUSS TUBE SETS



Ref.	FTC-1500T
Length in mm	909-1500
Truss diameter in mm	50
Tilt adjustment in degrees	0-20°



Ref.	FTCD-1500T
Length in mm	909-1500
Truss diameter in mm	50
Tilt adjustment in degrees	0-20°



DIRECT TRUSS MOUNT



2 X



Ref.	390694
Dimensions in mm excl. clamps	W 450 x D 30 x H 450
Suitable for truss width in mm	250 - 300
Truss diameter in mm	50



Ref.	392560
Dimensions in mm excl. clamps	W 530 x D 30 x H 450
Suitable for truss width in mm	300 - 400
Truss diameter in mm	50



Lift system solutions

for flat panels

Have you ever thought about hiding your flat panel when not in use?

It's no problem with the Audipack lift system solutions. A push of a button lifts, lowers, hides and rotates a flat panel of any size.



Audipack®

It's great to have solutions...

Experience the magic of the unexpected

CUSTOM-MADE



Flat panels appear out of nowhere, impressively, silently and safely with Audipack lift system solutions.

There are multiple options to hide your flat screen when not in use. Because every situation and flat panel used in a project is unique, Audipack designs custom-made solutions.

Get inspired by the possibilities!

Vertical ceiling lifts

Our high quality and durable vertical ceiling lift lowers a flat panel silently from above the ceiling. The lift is standard equipped with a dropdown safety device and ceiling finishing kit. The lift is silent because of the low voltage motors. The use of high quality components guarantee you of a durable, reliable and low maintenance system. A ceiling hatch that opens before the flat panel is lowered is available as an option, as well as electric rotation and inclination of the panel.

High-end Pop up lift systems

These high-end flat panel pop up lifts provide a superb solution for the presentation of a flat panel, if space comes at a premium, or if aesthetics require that the flat panel is out of sight when not in use. These lifts are suitable for cabinet mounting and are operated by very silent electrical motor drives. Rotation and electric hatches are available as options.

"Please contact sales for additional technical information"

- ▲ Custom-made
- ▲ Available for any size of screen
- ▲ Very slim finishing
- ▲ Low noise lift mechanism



Wall mounted lift systems

for touch screens

The electric height adjustable wall lift systems,

allow you to use touch screen monitors in a more flexible way. Just push a button to change the user height. Ideal for schools or rooms with multiple users. The wall systems are easy to install and there are floor and ceiling options.



Audipack®

It's great to have solutions...

Plug & Play height adjustable wall lift systems

Height adjustable wall lift systems for touch screens

These wall lift systems are perfect for the education market, being flexible, durable and rigidly constructed.

Lift your large flat panel or touch screen in any position with just the touch of a button.

These lift systems offers a very short installation time! The lift systems are provided with an universal mounting systems to mount any brand and type of screen up to 160 Kg.

Audipack designs and manufactures in privately owned design studios and factories, so we can customise the system to suit individual customer's needs. We use our own durable materials that are easy to clean and highly scratch resistant.

Use the **Screen-Crawler** (SC-190/SC-200) Installation Aid for safe installation of large, heavy screens. (See page 63)



1 hour installation!

- ▲ **Short installation time**
- ▲ **Easy equipment installation**
- ▲ **Durable, well designed and slim constructions**
- ▲ **Safe and secure**



DWS-120E, DWS-160E



Mounting interface: VESA 400 x 200,
400 x 400, 600 x 200, 600 x 400 and L&S5

All products



Locked when mounted with
an Audipack mounting bracket

DWS-120E, DWS-160E



Lockable VESA
mounting patterns

WALL MOUNTED LIFT SYSTEM



Ref.	DWS-T100E
Height adjustable in mm	650
Wall offset in mm	100
Mounting interface	VESA 400 x 200, 400 x 400, and L&S5
Connectivity	Hand control included, contact relay Optional wall switch, RF remote or bluetooth receiver
Power	230 VAC 50-60Hz/24 VDC
Optional	soundbar, use LSS-DWS-T for mounting.




ELECTRIC HEIGHT ADJUSTABLE WALL LIFT SYSTEMS



Ref.	DWS-120E
Dimensions in mm	W1010 x H2300 x D125
Presentation height in mm	700-1580 (centre screen)
Mounting interface	VESA 400 x 200, 400 x 400, 600 x 200, 600 x 400 and L&S5
Connectivity	RF remote included
Power	230 VAC 50-60Hz



Ref.	DWS-160E
Dimensions in mm	W1010 x H2300 x D125
Presentation height in mm	700-1580 (centre screen)
Mounting interface	VESA 400 x 200, 400 x 400, 600 x 200, 600 x 400 and L&S5
Connectivity	Contact relay Optional wall switch & IR/RF remote
Power	230 VAC 50-60Hz



FLOOR LIFT SYSTEM FOR FLAT PANELS



Ref.	FSL-160E	FSL-160E-XL
Dimensions in mm	W 860 x H 1719 x D 147	W 860x H 1953 x D 147
Presentation height in mm	899 - 1399 (centre screen)	913 - 1653 (centre screen)
Mounting interface	Up to VESA 800x600	Up to VESA 800x600
Power	230 VAC 50-60Hz	230 VAC 50-60Hz



Optional:	
FSL-160-FMP:	Floor mounting plate for FSL-160E & FSL-160E-XL
FSL-160-WM:	Wall mounting set for FSL-160E & FSL-160E-XL
FSS-160-LTS:	Laptop shelf for FSL-160E & FSL-160E-XL. Also suitable for FSW-T160B, FSW-T160-XL, FSW-T160BT, see page 48 for more info.

WALL MOUNTED LIFT SYSTEMS

ACCESSORIES

MOUNTING BRACKETS FOR FLAT PANELS



Mount any brand and type of flat panel on any Audipack system with the Audipack mounting brackets.



UFPRO series



Brand related mounts



VESA mounts

MOUNTING CAMS FOR DIRECT VESA MOUNTING

RECESSED MOUNTING HOLES



Ref.

392618
M6 x 13392318
M8 x 13390618
M10 x 13392621
M6 x 35392620
M8 x 35

FLOOR TO CEILING MOUNTING SET



Ref.



CTF-700D-kit

Columns are custom made, to match required height

REMOTE CONTROLS



Ref.

Suitable for

261436
External 1-channel RF remote set.261318
DWS-T100 and DWS-160E260214 (IR)
DWS-160E260215 (RF)
DWS-160E

WALL MOUNT EXTENSION SET

Suitable for DWS-120E and DWS-160E



Ref.

Adjustable range in mm

DWS-WME
65-100

VESA EXTENSION SET TO 600x400

Ref.
Mounting range
Suitable forDWS-MEV6
Vesa 600x400
DWS-T100

Multimedia Trolley®



Audipack®

It's great to have solutions...

Multimedia Trolley

The trolley for multiple purposes



The multimedia trolley is the perfect addition for inside and outside and can be used for multiple purposes. The trolley is standard equipped with a build-in remote controlled lift system and is available for 46, 55 and 65 inch TV's. With the wireless remote, the TV pops up out of the furniture. A splash of rain is no problem because the multimedia trolley is splash water proof. The multimedia trolley is also custom build available.

Technical specifications:

- ▲ **Laminated finish as standard**
- ▲ **Electric lift inside**
- ▲ **Swivel / brake wheels**

Benefits:

- ▲ **Very nice finishing**
- ▲ **Also custom models available**

MULTIMEDIA TROLLEY



* See drawings at www.audipack.com

Ref.	GV-46E	Max. presentation height in mm	1300 (center screen)	Max. + 46		
		Max. screen thickness in mm	52 - 64*			
		Mounting interface	max VESA 400 x 400			
Ref.	GV-55E	Max. presentation height in mm	1700 (center screen)	Max. + 55		
		Max. screen thickness in mm	52 - 64*			
		Mounting interface	max VESA 400 x 400			
Ref.	GV-65E	Max. presentation height in mm	1700 (center screen)	Max. + 65		
		Max. screen thickness in mm	52 - 64*			
		Mounting interface	max VESA 400 x 400			

Pop up lift systems

for flat panels

Silently raises and lowers the TV out of the furniture

No jerky movement or unexpected sounds, just the silent, smooth appearance of the screen on demand.

This fast and rigid lift system complements interior furniture. Well designed, the plug and play lift is quick to install and robust in operation.

The telescopic Pop up lift systems

pops up your screen of up to 90°. Single, double and quad column models are available.



- ▲ ***Integrated cable guidance***
- ▲ ***Easy installation***
- ▲ ***Rigid build***
- ▲ ***Modern design***



Universal
mounting interface



Cable guidance

POP UP LIFT SYSTEMS

TELESCOPIC POP UP LIFT SYSTEMS

Power supply: 230 VAC 50-60 Hz/24 VDC

**Ref.**

Dimensions in mm
 Nett stroke
 Presentation height (centre screen)
 Mounting interface
 Connectivity

P3674 Single column lift

W 400 x D 213 x H 585-1260

675**1056**

VESA 75, 100, 200 & L&S 3

Contact relay

Optional wall switch, IR/RF remote or bluetooth receiver

**Ref.**

Dimensions in mm
 Nett stroke
 Presentation height (centre screen)
 Max. mounting range in mm.
 Min. mounting range in mm.
 Connectivity

P5321 Single column lift

W 860 x D 290 x H 880-1845

965**1465**

W 810 x H 446

W 130

Contact relay

Optional wall switch, IR/RF remote

**Ref.**

Dimensions in mm
 Nett stroke
 Presentation height (centre screen)
 Max. mounting range in mm.
 Min. mounting range in mm.
 Connectivity

FPL-1010

W 424 x D 249 x H min. 925

999**1533-1633**

W 670 x H 446

W 174 x H 100

Contact relay

Optional wall switch, IR/RF remote

**Ref.**

Dimensions in mm
 Nett stroke
 Presentation height (centre screen)
 Mounting interface

FPL-100E

W 716 x D 171 x H 1320

1300**2000**

VESA 400 x 200, 400 x 400,

600 x 200, 600 x 400

Contact relay

Optional wall switch & IR/RF remote

**Ref.**

Dimensions in mm
 Max screen size
 Mounting interface
 Connectivity
 Max load.

FTL-1510B

W 495x D 130 x H 600

W410 x D70 x H360

VESA 100 & 200

RS485/232, RF remote

8.5 KG

Anti-pinch, safety system



* Screen not included

Ref.

Dimensions in mm
 Max screen size
 Mounting interface
 Connectivity
 Max load.

FTL-2210B

W 615 x D 130 x H 660

W530 x D70 x H380

VESA 100

RS485/232, RF remote

8.5 KG

Anti-pinch, safety system



* Screen not included

Ref.

Dimensions in mm
 Max screen size
 Mounting interface
 Connectivity
 Max load.

FTL-2410B

W 675 x D 130 x H 660

W590 x D70 x H380

VESA 100

RS485/232, RF remote

8.5 KG

Anti-pinch, safety system



* Screen not included

ACCESSORIES

CONNECTIVITY


High end pop up lift systems:

Lift + hatch
Lift + rotation
Lift + rotation + hatch

1 receiver, 1 transmitter
2 receivers, 1 transmitter
2 receivers, 1 transmitter



Ref.	260214	260215	260218	260219	460286	261318
Description	IR remote (internal)	RF remote (internal)	IR remote (external)	RF remote (external)	RF remote	Wall switch
Suitable for	High end pop up lift systems	High end pop up lift systems	Telescopic lift systems	Telescopic lift systems	P3674, P5321, P5369, P5382	Telescopic lift systems



Ref.	261436
Description	External 1-channel RF remote set.
Suitable for	




Fold down ceiling lift systems

for flat panels

Ever thought of hiding your flat panel when not in use?

Audipack offers a neat solution

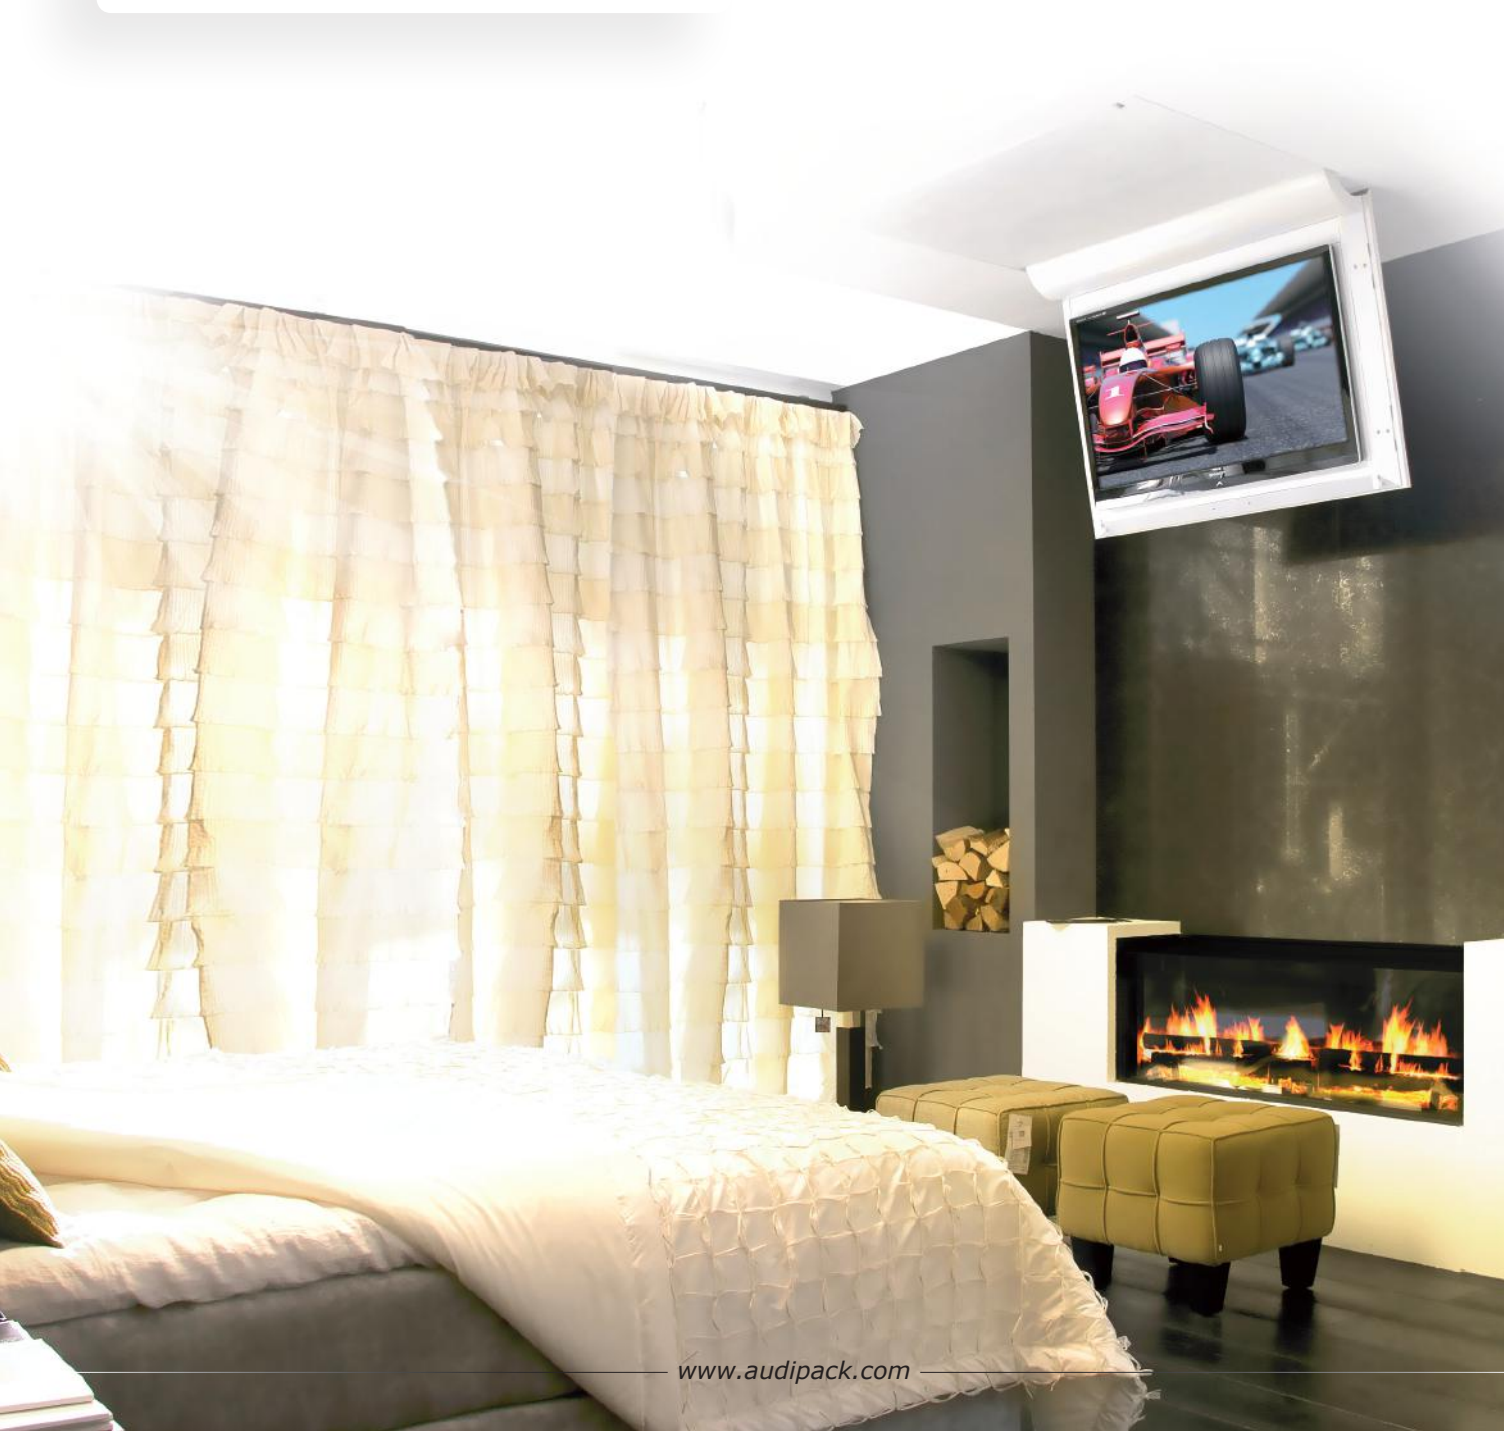

Flat panel *fold down* lift systems



A different thought about concealing your TV in the room...

When installing TV's on the wall, or popping out of a furniture is not an option or simply not possible, than the Audipack fold down lift systems are the best solution.

With this unique system the TV folds down from the ceiling with just a push on a button. The TV is mounted to the ceiling, but cause of the 100 degrees opening angle the TV aims perfectly to the viewing position.

The fold down lift systems are available in surface mounted and in-ceiling mounted units.


The **surface mounted** versions are very thin lift systems that can be installed in any room, from bed rooms to small offices. The lightweight lift enables an easy and quick installation for any installer.

The **in-ceiling mounted** versions are available up to almost any screen size. With these models an automatic lowering panel is optional available to close the ceiling above the TV; as if the TV has always been there....

In-ceiling mounted model with optional available ceiling closing unit

Surface mounted model


- ▲ **Ultra-thin installation height (surface mounted version)**
- ▲ **Perfect viewing angle**
- ▲ **Neatly finished, no mechanics visible**

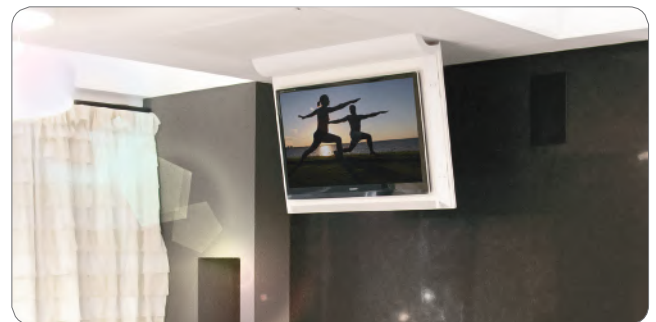

Minimalistic design and neatly finished



Optional ceiling closing unit



Neatly finished



Outdoor models, a water repellent rubber seal closes the lift up to IP 56.

FOLD DOWN CEILING LIFT SYSTEMS

SURFACE MOUNTED FOLD DOWN LIFT SYSTEMS

Standard VESA 100 x 200, 200 x 200, 200 x 400 and 400 x 400, no additional bracket required



"Registered design, patent pending"


Power supply: 100-240VAC/5A 50-60 Hz

Ref.

Dimensions in mm
Max. flat panel in mm
Connectivity

FFCL-3032S


Approx. W 1200 x D 750 x H 100
W 980 x D 50 x H 595
Contact relay, RS-232
Optional wall switch & IR/RF remote

**Ref.**

Dimensions in mm
Max. flat panel in mm
Connectivity

FFCL-4046S

Approx. W 1400 x D 1000 x H 100
W 1120 x D 50 x H 675
Contact relay, RS-232
Optional wall switch & IR/RF remote



FOLD DOWN LIFT SYSTEMS (IN-CEILING)

Standard VESA 200 x 200, 400 x 200, 600 x 200 and 800 x 400



Connectivity:
Contact relay, wall switch, IR/RF remote or bluetooth receiver

Power supply: 230 VAC 50-60 Hz/24 VDC

Ref.

Dimensions in mm
Max. flat panel in mm

FFCL-3032

W 1416 x D 963 x H 165
W 980 x D 140 x H 595

**Ref.**

Dimensions in mm
Max. flat panel in mm

FFCL-4042

W 1496 x D 1058 x H 165
W 1060 x D 140 x H 690

**Ref.**

Dimensions in mm
Max. flat panel in mm

FFCL-4650

W 1586 x D 1128 x H 165
W 1150 x D 140 x H 760

**Ref.**

Dimensions in mm
Max. flat panel in mm

FFCL-5255

W 1776 x D 1258 x H 210
W 1340 x D 175 x H 840

**Ref.**

Dimensions in mm
Max. flat panel in mm

FFCL-6065 (with safety clamp)

W 1972 x D 1520 x H 2
W 1620 x D 155 x H 1045



ACCESSORIES

WALL SWITCH

Only suitable for fold down ceiling lift with just falling ceiling part.



Ref. 261318

REMOTE CONTROL



Ref. 260214 (IR) 260215 (RF)

ELECTRIC CEILING CLOSING UNIT

The electric ceiling closing unit is an optional unit that closes the ceiling above the flat panel in opened position. This advantages in a continued ceiling structure above the screen and makes the lift almost invisible. Please refer to the price list for a model listing.



Ref.

FFCL-CF

Liftomatic®

rental systems

Protect your equipment by using the Audipack Liftomatic flat panel lifting range.

The flat panel Liftomatic® is an all in one transport and presentation solution for screens up to 90"

Audipack offers two types of Liftomatic® systems;

Flightcase Liftomatic® systems. This flightcase with built-in telescopic lift system accommodates flat panels with a diagonal up to 65 inch. With just the push of a button your screen rises to a presentation height of 1800 mm (centre screen). Inside the flightcase is a big accessory compartment. As option there is a cover plate to cover the top of the flightcase in open position during use.

Liftomatic® systems with retractable wheel

Audipack also engineers and manufactures custom rental systems for the easy transportation and set up of LED and OLED walls.

The high tech components and intuitive controls minimise the need for tools or the handling of products.



Flightcase Liftomatic®

Flightcase Liftomatic®



All in one
transport and presentation solution

Available with
optional cover plate

UNIVERSAL FLIGHTCASE LIFTOMATIC® SYSTEMS, A PERFECT RENTAL SYSTEMPower supply: **230 VAC 50-60 Hz****Including remote control**
 For screen installation, an Audipack bracket is required.

Ref.	FLM-4042		
Flightcase dimensions in mm	custom, depends on screen size	Max. "	Max. "
Max. flat panel dimensions in mm	W 980 x H 650	42	75
Presentation height (centre screen)	1735 mm		
Mounting interface	L&S 5		
Ref.	FLM-4650		
Flightcase dimensions in mm	custom, depends on screen size	Max. "	Max. "
Max. flat panel dimensions in mm	W 1160 x H 700	50	75
Presentation height (centre screen)	1735 mm		
Mounting interface	L&S 5		
Ref.	FLM-5055		
Flightcase dimensions in mm	custom, depends on screen size	Max. "	Max. "
Max. flat panel dimensions in mm	W 1350 x H 900	55	75
Presentation height (centre screen)	1735 mm		
Mounting interface	L&S 5		
Ref.	FLM-6065		
Flightcase dimensions in mm	custom, depends on screen size	Max. "	Max. "
Max. flat panel dimensions in mm	W 1725 x H 960	65	75
Presentation height (centre screen)	1735 mm		
Mounting interface	L&S 5		

FLIGHTCASE LIFTOMATIC® SYSTEMS, A PERFECT RENTAL SYSTEMPower supply: **230 VAC 50-60 Hz**

Ref.	FLM-5321		
Flightcase dimensions in mm	custom, depends on screen size	Max. "	Max. "
Presentation height (centre screen)	1890 mm	55	50
Max. mounting range in mm.	W 810 x H 446		
Built-in lift system	P5321 <u>single</u> column lift, page 95		
Ref.	FLM-5369		
Flightcase dimensions in mm	custom, depends on screen size	Max. "	Max. "
Presentation height (centre screen)	1890 mm	75	100
Max. mounting range in mm.	W 810 x H 446		
Built-in lift system	P5369 <u>double</u> column lift, page 95		

ACCESSORIES**COVER PLATE**Ref.
Suitable forP4270
FLM-4042P4271
FLM-4650P4272
FLM-5255

Indoor housings


for flat panels

The indoor housings are the perfect way to protect and brand your flat panel



Screens

in public places

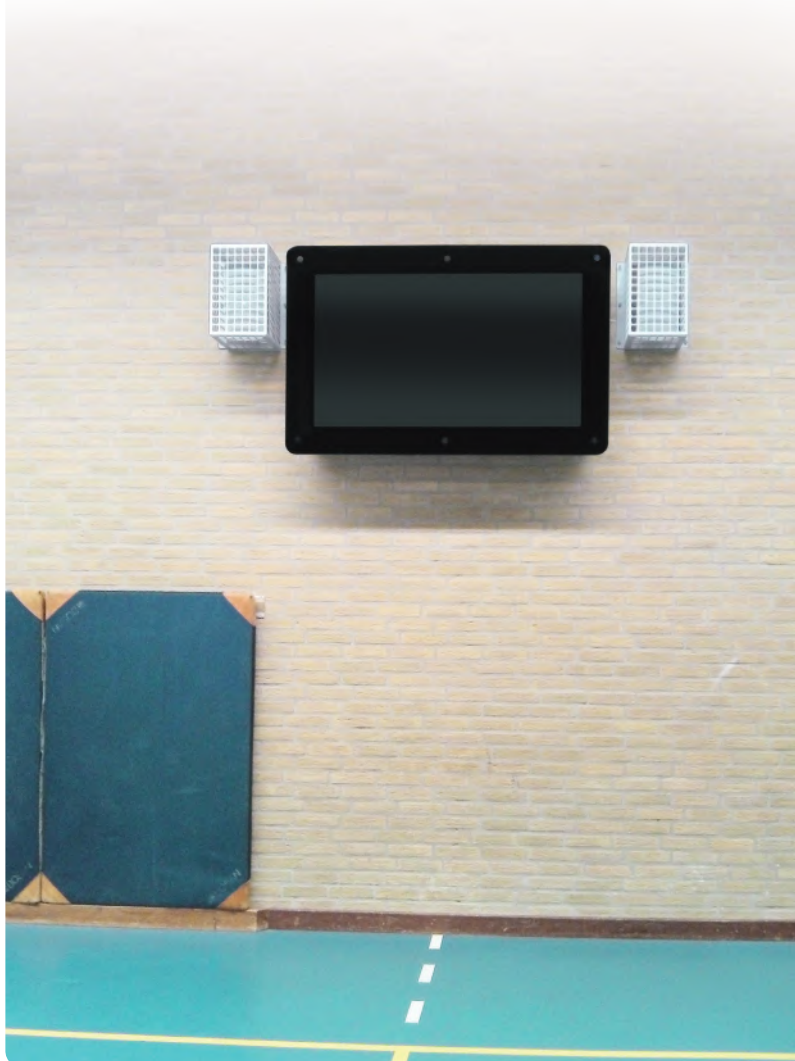

Screens mounted in public places demand protective solutions.

The Audipack lockable indoor housings offer heavy-duty protection for the flat panel, and a sleek, modern look that does not detract from the screen content.

The indoor theft delay housing is a security housing for digital signage projects. A fully removable front with hardened glass protects the monitor.

It is available in portrait or landscape models.

The stylish glass front is made from polished, coated and hardened glass and the housing also offers internal space for equipment such as players and switches.

Slim-line indoor theft delay housings are also available for LCD and LED screens with a reduction in depth of 50% to complement thinner panels.

- ▲ Suitable for any brand and type of flat panel
- ▲ Very easy installation
- ▲ Easy equipment and flat panel access
- ▲ Available in Any RAL colour and finishing



(FSMT-70) The flat panel is very easy accessible



High level finishing



Easy access after unlocking the glass front



Optional available in any RAL colour

Slim-line THEFT DELAY HOUSINGS

For screens up to 75 mm. depth

Max. brightness: 700 cd/m²

IP 30



Colour: **Black bezel, white housing, glass front**

	Landscape	Portrait		
Ref.	FSMT-N32S	FSMT-N32SP		Max. " 32
Max. screen size	W 730 x D 75 x H 430	W 430 x D 75 x H 730		
Ref.	FSMT-N40S	FSMT-N40SP		Max. " 40
Max. screen size	W 920 x D 75 x H 530	W 530 x D 75 x H 920		
Ref.	FSMT-N42S	FSMT-N42SP		Max. " 42
Max. screen size	W 965 x D 75 x H 560	W 560 x D 75 x H 965		
Ref.	FSMT-N46S	FSMT-N46SP		Max. " 46
Max. screen size	W 1050 x D 75 x H 605	W 605 x D 75 x H 1050		
Ref.	FSMT-N47S	FSMT-N47SP		Max. " 47
Max. screen size	W 1075 x D 75 x H 620	W 620 x D 75 x H 1075		
Ref.	FSMT-N49S	FSMT-N49SP		Max. " 49
Max. screen size	W 1130 x D 75 x H 640	W 640 x D 75 x H 1130		
Ref.	FSMT-N50S	FSMT-N50SP		Max. " 50
Max. screen size	W 1140 x D 75 x H 655	W 655 x D 75 x H 1140		
Ref.	FSMT-N55S	FSMT-N55SP		Max. " 55
Max. screen size	W 1250 x D 75 x H 715	W 715 x D 75 x H 1250		
Ref.	FSMT-N60S	FSMT-N60SP		Max. " 60
Max. screen size	W 1365 x D 75 x H 785	W 785 x D 75 x H 1365		
Ref.	FSMT-N65S	FSMT-N65SP		Max. " 65
Max. screen size	W 1460 x D 75 x H 835	W 835 x D 75 x H 1460		

CLASSIC THEFT DELAY HOUSINGS

For screens up to 150 mm. depth

Max. brightness: 700 cd/m²

Optional: non-reflective glass bezel

IP 30



Colour: **Black bezel, white housing glass front**

	Landscape	Portrait		
Ref.	FSMT-N32	FSMT-N32P		Max. " 32
Max. screen size	W 730 x D 150 x H 430	W 430 x D 150 x H 730		
Ref.	FSMT-N40	FSMT-N40P		Max. " 40
Max. screen size	W 920 x D 150 x H 530	W 530 x D 150 x H 920		
Ref.	FSMT-N42	FSMT-N42P		Max. " 42
Max. screen size	W 965 x D 150 x H 555	W 555 x D 150 x H 965		
Ref.	FSMT-N46	FSMT-N46P		Max. " 46
Max. screen size	W 1050 x D 150 x H 605	W 605 x D 150 x H 1050		
Ref.	FSMT-N47	FSMT-N47P		Max. " 47
Max. screen size	W 1075 x D 150 x H 620	W 620 x D 150 x H 1075		
Ref.	FSMT-N49	FSMT-N49P		Max. " 49
Max. screen size	W 1130 x D 150 x H 640	W 640 x D 150 x H 1130		
Ref.	FSMT-N50	FSMT-N50P		Max. " 50
Max. screen size	W 1140 x D 150 x H 645	W 645 x D 150 x H 1140		
Ref.	FSMT-N55	FSMT-N55P		Max. " 55
Max. screen size	W 1250 x D 150 x H 715	W 715 x D 150 x H 1250		
Ref.	FSMT-N60	FSMT-N60P		Max. " 60
Max. screen size	W 1365 x D 150 x H 785	W 785 x D 150 x H 1365		
Ref.	FSMT-N65	FSMT-N65P		Max. " 65
Max. screen size	W 1460 x D 150 x H 835	W 835 x D 150 x H 1460		
Ref.	FSMT-N70	FSMT-N70P		Max. " 70
Max. screen size	W 1575 x D 115/145 x H 905	W 905 x D 115/145 x H 1575		
Ref.	FSMT-N72	FSMT-N72P		Max. " 72
Max. screen size	W 1625 x D 115/145 x H 930	W 930 x D 115/145 x H 1625		
Ref.	FSMT-N75	FSMT-N75P		Max. " 75
Max. screen size	W 1680 x D 115/145 x H 940	W 940 x D 115/145 x H 1680		
Ref.	FSMT-N80	FSMT-N80P		Max. " 80
Max. screen size	W 1805 x D 115/145 x H 1030	W 1030 x D 115/145 x H 1805		

Screens in shops

FSMI housings with open front are suitable for installing screens in shop window environments. The open front structure allows to extract the heat radiation from the screen without using forced ventilation.

FSMI housing can be installed to 700 and 900 series floorstands and to the ceiling to floor CTF systems.

In combination with the ACG air curtain, the heat radiation of the shop window can be cooled down.



Slim-line **INDOOR HOUSINGS OPEN**

For screens up to 75 mm. depth

Max. brightness: **700 cd/m2**

Ideal for retail areas



Colour: **Black bezel, white housing, open front bezel, no glass**

	Landscape	Portrait	
Ref.	FSMI-N32S	FSMI-N32SP	
Max. screen size	W 800 x D 75 x H 500	W 500 x D 75 x H 800	Max. ° 32
Ref.	FSMI-N40S	FSMI-N40SP	
Max. screen size	W 990 x D 75 x H 600	W 600 x D 75 x H 990	Max. ° 40
Ref.	FSMI-N42S	FSMI-N42SP	
Max. screen size	W 1035 x D 75 x H 630	W 630 x D 75 x H 1035	Max. ° 42
Ref.	FSMI-N46S	FSMI-N46SP	
Max. screen size	W 1120 x D 75 x H 675	W 675 x D 75 x H 1120	Max. ° 46
Ref.	FSMI-N47S	FSMI-N47SP	
Max. screen size	W 1145 x D 75 x H 690	W 690 x D 75 x H 1145	Max. ° 47
Ref.	FSMI-N49S	FSMI-N49SP	
Max. screen size	W 1175 x D 75 x H 705	W 705 x D 75 x H 1175	Max. ° 49
Ref.	FSMI-N50S	FSMI-N50SP	
Max. screen size	W 1205 x D 75 x H 725	W 725 x D 75 x H 1210	Max. ° 50
Ref.	FSMI-N55S	FSMI-N55SP	
Max. screen size	W 1320 x D 75 x H 785	W 785 x D 75 x H 1320	Max. ° 55
Ref.	FSMI-N60S	FSMI-N60SP	
Max. screen size	W 1435 x D 75 x H 855	W 855 x D 75 x H 1435	Max. ° 60
Ref.	FSMI-N65S	FSMI-N65SP	
Max. screen size	W 1460 x D 75 x H 910	W 910 x D 75 x H 1460	Max. ° 65

ACCESSORIES

UNIFLATFIX PRO (UNIVERSAL FLAT PANEL BRACKETS)



Lock the bracket with the optional lock
Ref.: 230052



UFPRO-V400
W 430 x D 6 x H 430
W 400 x H 400
W 100 x 100



UFPRO-0500
W 516 x D 32 x H 382
W 470 x H 360
W 125

UFPRO-0700
W 716 x D 32 x H 502
W 670 x H 446
W 125

UFPRO-0800
W 860 x D 32 x H 502
W 810 x H 446
W 130

UFPRO-0801
W 860 x D 39 x H 727
W 810 x H 671
W 120



CEILING MOUNTS



Ref.
Tube length



FSM-CM600
600 mm



Custom ceiling mount length available on request

FSM-CM1000
1000 mm

SCREEN-CRAWLER (INSTALLATION AID)



Ref.

SC-190

SC-200

Max load

200 kg

200 kg

Height (retracted)

1990 mm

2200 mm

Max. lift height (hook)

2900 mm

3550 mm

▲ Complies with NEN-EN-ISO 12100:210NL

▲ Yearly check-up required





Outdoor housings

for flat panels

The Audipack outdoor housings

The Audipack outdoor solutions finish and protects flat panels in outdoor applications



Flat panels in open areas, and public places



Flat panels are being used more often for media systems in public spaces and outside areas, and need to be protected against the climate and vandalism. Each outdoor housing is custom -made for the specific flat screen and environmental circumstances

Audipack's flat panel housings enclose the panel in a sturdy, durable and easy to mount metal housing with a safety glass front.

The front of the housing is locked, opened with a unique key for maintenance and installation. Available with standard or custom built mounting accessories.

The standard outdoor housings are equipped with:

- ▲ thermostatically controlled ventilation and heating system
- ▲ safety glass
- ▲ replaceable filters

The standard active ventilation and heating system reduces condensation inside the housing, with Ip rating IP55.


The high brightness outdoor housings have IP rating IP65 and are equipped with:

- ▲ thermostatically controlled ventilation and heating system
- ▲ safety glass
- ▲ airconditioning (needed for high brightness screens)

- ▲ **Suitable for any brand and type of flat panel**
- ▲ **Very easy installation**
- ▲ **Easy equipment and flat panel access**
- ▲ **Available in Any RAL colour and finishing**
- ▲ **Landscape and portrait models available**



(FSMO-70) The flat panel is very easy accessible



High level finishing



Easy access after unlocking the glass front



Standard in RAL 9016
Optional available in any RAL colour

OUTDOOR HOUSINGS

Max. surrounding temp. -20°C to +30°C*

Optional: non-reflective glass bezel
Standard colour black RAL 9005
Suitable for shady environments



IP 55



Power supply:
230 VAC 50-60 Hz

	Landscape	Portrait	
Ref.	FSMO-N32	FSMO-N32P	Max. ° 32
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W730 x D110 x H430	W430x D150 x H730	
Ref.	FSMO-N40	FSMO-N40P	Max. ° 40
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W850 x D150 x H460	W460 x D150 x H850	
Ref.	FSMO-N42	FSMO-N42P	Max. ° 42
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W965 x D150 x H560	W560 x D150 x H965	
Ref.	FSMO-N46	FSMO-N46P	Max. ° 46
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W1050 x D150 x H605	W605 x D150 x H1050	
Ref.	FSMO-N47	FSMO-N47P	Max. ° 47
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W1075 x D150 x H620	W620 x D150 x H1075	
Ref.	FSMO-N49	FSMO-N49P	Max. ° 49
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W1105 x D150 x H635	W635 x D150 x H1105	
Ref.	FSMO-N50	FSMO-N50P	Max. ° 50
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W1135 x D150 x H655	W655 x D150 x H1135	
Ref.	FSMO-N55	FSMO-N55P	Max. ° 55
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W1250 x D150 x H715	W715 x D150 x H1250	
Ref.	FSMO-N60	FSMO-N60P	Max. ° 60
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W1365 x D150 x H785	W785 x D150 x H1365	
Ref.	FSMO-N65	FSMO-N65P	Max. ° 65
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W1460 x D150 x H840	W840 x D150 x H1460	
Ref.	FSMO-N70	FSMO-N70P	Max. ° 70
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	Vesa 400 & L&S 5	Vesa 400 & L&S 5	
Max. screen size	W1575 x D115/145 x H905	W905 x D115/145 x H1575	
Ref.	FSMO-N72	FSMO-N72P	Max. ° 72
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W1625 x D115/145 x H930	W930 x D 15/145 x H1625	
Ref.	FSMO-N75	FSMO-N75P	Max. ° 75
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W1680 x D115/145 x H960	W960 x D115/145 x H1680	
Ref.	FSMO-N80	FSMO-N80P	Max. ° 80
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W1805 x D115/145 x H1030	W1030 x D115/145 x H1805	
Ref.	FSMO-N85	FSMO-N85P	Max. ° 85
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W1915 x D115/145 x H1090	W1090 x D115/145 x H1915	

*The housing is intended to use the surrounding air for ventilation; the surrounding air may not exceed the allowed working temperature of the flat panel.

OUTDOOR HOUSINGS

Slim-line OUTDOOR HOUSINGS

For screens up to 75 mm. depth

Max. brightness: **700 cd/m²**Max. surrounding temp. **-20°C to +30°C***

Optional: non-reflective glass bezel
Standard colour black RAL 9005
Suitable for shady environments

**IP 55**

Power supply:
230 VAC 50-60 Hz

Audipack advises to use
screens with an output of 800+
nits with IPS technology for
outdoor and bright ambient
light applications.

	Landscape	Portrait	
Ref.	FSMO-N32S	FSMO-N32SP	Max. " 32
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 730 x D 75 x H 430	W 430 x D 75 x H 730	
Ref.	FSMO-N40S	FSMO-N40SP	Max. " 40
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 920 x D 75 x H 530	W 530 x D 75 x H 920	
Ref.	FSMO-N42S	FSMO-N42SP	Max. " 42
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 965 x D 75 x H 560	W 560 x D 75 x H 965	
Ref.	FSMO-N46S	FSMO-N46SP	Max. " 46
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1050 x D 75 x H 605	W 605 x D 75 x H 1050	
Ref.	FSMO-N47S	FSMO-N47SP	Max. " 47
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1075 x D 75 x H 620	W 620 x D 75 x H 1075	
Ref.	FSMO-N49S	FSMO-N49SP	Max. " 49
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1130 x D 75 x H 640	W 640 x D 75 x H 1130	
Ref.	FSMO-N50S	FSMO-N50SP	Max. " 50
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1140 x D 75 x H 655	W 655 x D 75 x H 1140	
Ref.	FSMO-N55S	FSMO-N55SP	Max. " 55
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1250 x D 75 x H 715	W 715 x D 75 x H 1250	
Ref.	FSMO-N60S	FSMO-N60SP	Max. " 60
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1365 x D 75 x H 785	W 785 x D 75 x H 1365	
Ref.	FSMO-N65S	FSMO-N65SP	Max. " 65
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1460 x D 75 x H 840	W 840 x D 75 x H 1460	



OUTDOOR HOUSINGS HIGH BRIGHTNESS SCREENS

LANDSCAPE

PORTRAIT

For screens up to 75 mm. depth

IP 55Max. surrounding temp. **-20°C to +30°C**

Suitable for full sunlight
Standard equipped with
thermostatically controlled heating
and ventilation.



* Audipack advises to use screens with an output of 800+ nits with IPS technology for outdoor and bright ambient light applications.

For these models refer to price list or website for brand related active ventilated monitor brackets

* Always check the maximum allowed temperature of the screen.

**CUSTOM-MADE
TO FIT ANY BRAND**

Power supply:
230 VAC 50-60 Hz

Ref.	FSMO-N46HBV	FSMO-N46HBVP	Max. °
Colour	Black bezel, white housing	Black bezel, white housing	
Max. screen dimensions approx.	W 1050 x D 150 x H 605	W 605 x D 150 x H 1050	46
Ref.	FSMO-N47HBV*	FSMO-N47HBVP*	Max. °
Colour	Black bezel, white housing	Black bezel, white housing	
Max. screen dimensions approx.	W 1050 x D 150 x H 605	W 605 x D 150 x H 1050	47
Ref.	FSMO-N49HBV*	FSMO-N49HBVP*	Max. °
Colour	Black bezel, white housing	Black bezel, white housing	
Max. screen dimensions approx.	W 1130 x D 150 x H 640	W 640 x D 150 x H 1130	49
Ref.	FSMO-N55HBV*	FSMO-N55HBVP*	Max. °
Colour	Black bezel, white housing	Black bezel, white housing	
Max. screen dimensions approx.	W 1230 x D 150 x H 620	W 620 x D 150 x H 1230	55
Ref.	FSMO-N60HBV*	FSMO-N60HBVP*	Max. °
Colour	Black bezel, white housing	Black bezel, white housing	
Max. screen dimensions approx.	W 1365 x D 150 x H 785	W 785 x D 150 x H 1365	60
Ref.	FSMO-N65HBV*	FSMO-N65HBVP*	Max. °
Colour	Black bezel, white housing	Black bezel, white housing	
Max. screen dimensions approx.	W 1460 x D 150 x H 835	W 835 x D 150 x H 1460	65
Ref.	FSMO-N72HBV*	FSMO-N72HBVP*	Max. °
Colour	Black bezel, white housing	Black bezel, white housing	
Max. screen dimensions approx.	W 1600 x D 135 x H 900	W 900 x D 135 x H 1600	72
Ref.	FSMO-N75HBV*	FSMO-N75HBVP*	Max. °
Colour	Black bezel, white housing	Black bezel, white housing	
Max. screen dimensions approx.	W 1625 x D 147 x H 903	W 903 x D 150 x H 1625	75
Ref.	FSMO-N85HBV*	FSMO-N85HBVP*	Max. °
Colour	Black bezel, white housing	Black bezel, white housing	
Max. screen dimensions approx.	W 1915 x D 147 x H 1090	W 1090 x D 147 x H 1915	85



OUTDOOR HOUSINGS

ACCESSORIES**UNIPLATFIX PRO** (UNIVERSAL FLAT PANEL BRACKETS)

Lock the bracket with the optional lock
Ref.: 230052



UFPRO-V400
W 430 x D 6 x H 430
W 400 x H 400
W 100 x 100

UFPRO-0500
W 516 x D 32 x H 382
W 470 x H 360
W 125

UFPRO-0700
W 716 x D 32 x H 502
W 670 x H 446
W 125



UFPRO-0800
W 860 x D 32 x H 502
W 810 x H 446
W 130

UFPRO-0801
W 860 x D 39 x H 727
W 810 x H 671
W 120

CEILING MOUNTS

Ref.
Tube length



FSM-CM-600
600 mm

Custom ceiling mount length available on request

FSM-CM-1000
1000 mm

Presentation

kiosks and displays

The Audipack presentation display is the ideal solution for an elegant, professional infotainment system

A perfect solution for every environment available in Indoor, outdoor and landscape models.



Let your **message** speak for itself

with the **Eye-Point®!**



The Outdoor Eye-points® are practical and beautiful. These slim built and neatly finished kiosks are available for 46" high brightness screens, and on request are available for any type and size.

- Safety glass front
- Swivelling flat panel arm for easy equipment access
- Suitable for any weather conditions

Thanks to the extensive choice of materials, colours and wrappings, the Eye-Point is applicable in any environment and situation.

- ▲ **Indoor and outdoor versions**
- ▲ **Available for many screen sizes**
- ▲ **Glass or open versions**
- ▲ **Custom colour designed**



All models integrated quick-installation L&S5 swivelling arm



Glass version


With its new-age design,

the Eye-Point® is a flexible, mobile presentation display that clearly communicates your message or information to your audience. The modern looks and distinguished design are at home in any environment – from the showroom to the supermarket. The flat panel is hidden and protected by the neatly assembled, strong casing.

The product serves the needs of you and your customers. The system achieves a high level of interactivity thanks to the built in digital signage software.

The indoor Eye-Points® are available for flat panel displays from 40" to 65" in both portrait and landscape orientation and are equipped with:


- Lockable castors
- Safety glass front
- Swiveling flat panel arm for easy equipment access

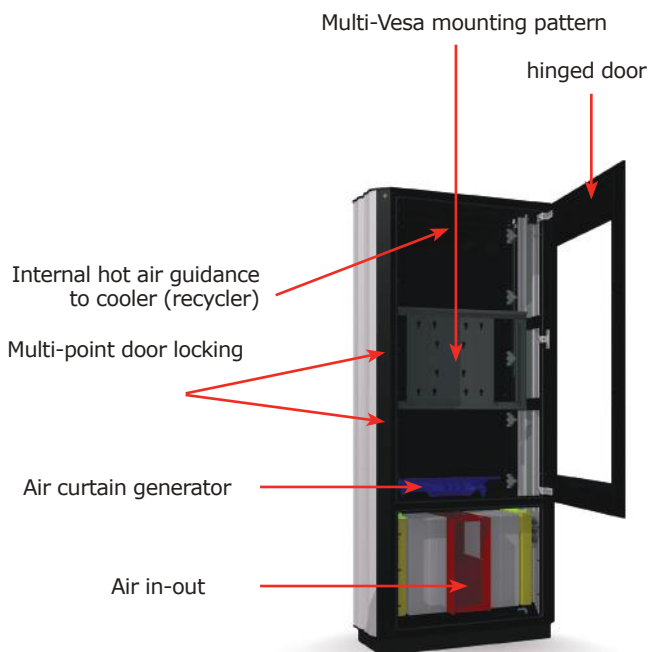

FOD-60HBD product explanation

Outdoor display suitable for 2 pieces 60" high brightness screens. Both display sides back to back installed and are accessible through the locked upper hinged glass doors.

PRESENTATION KIOSKS AND DISPLAYS

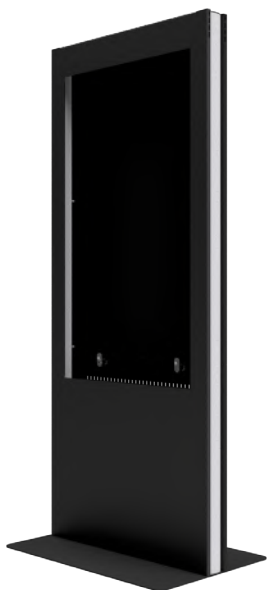FID INDOOR INFORMATION KIOSK**Glass****Open**Max. brightness: **700 cd/m2**

Ref.	FID-49P	FID-49PO	
Dimensions in mm	W 770 x D 510 x H 2005	W 770 x D 510 x H 2005	
Max. flat panel in mm	W 650 x D 60 x H 1100	W 650 x D 60 x H 1100	
Ref.	FID-55P	FID-55PO	
Dimensions in mm	W 852 x D 600 x H 2005	W 852 x D 600 x H 2005	
Max. flat panel in mm	W 731 x D 60 x H 1234	W 731 x D 60 x H 1234	
Ref.	FID-65P	FID-65PO	
Dimensions in mm	W 977 x D 600 x H 2005	W 977 x D 600 x H 2005	
Max. flat panel in mm	W 810 x D 60 x H 1435	W 810 x D 60 x H 1435	

FPD INDOOR PRESENTATION DISPLAY**Glass****Open**Max. brightness: **700 cd/m2**

- FPD-P with safety glass front
- FPD-PO with open bezel

Ref.	FPD-46P	FPD-46PO	
Dimensions in mm	W 830 x D 165 x H 2035	W 830 x D 165 x H 2035	
Max. flat panel in mm	W 675 x D 75 x H 1145	W 675 x D 75 x H 1145	
Presentation height in mm	1400 (center screen)	1400 (center screen)	
Ref.	FPD-47P	FPD-47PO	
Dimensions in mm	W 845 x D 165 x H 2060	W 845 x D 165 x H 2060	
Max. flat panel in mm.	W 690 x D 75 x H 1145	W 690 x D 75 x H 1145	
Presentation height in mm	1435 (center screen)	1435 (center screen)	
Ref.	FPD-55P	FPD-55PO	
Dimensions in mm	W 940 x D 165 x H 2235	W 940 x D 165 x H 2235	
Max. flat panel in mm.	W 785 x D 75 x H 1320	W 785 x D 75 x H 1320	
Presentation height in mm	1500 (center screen)	1500 (center screen)	
Ref.	FPD-60P	FPD-60PO	
Dimensions in mm	W 1010 x D 165 x H 2350	W 1010 x D 165 x H 2350	
Max. flat panel in mm.	W 855 x D 75 x H 1435	W 855 x D 75 x H 1435	
Presentation height in mm	1550 (center screen)	1550 (center screen)	
Ref.	FPD-65P	FPD-65PO	
Dimensions in mm	W 1065 x D 165 x H 2450	W 1065 x D 165 x H 2450	
Max. flat panel in mm.	W 905 x D 75 x H 1320	W 905 x D 75 x H 1320	
Presentation height in mm	1605 (center screen)	1605 (center screen)	

EYE-POINT® LANDSCAPE INDOOR**Glass**Max. brightness: **700 cd/m2**

Ref.	P3968	
Dimensions in mm	W 1326 x D 299 x H 1728	
Max. flat panel in mm	W 1050 x D 150 x H 643	
Mounting interface	L&S 5	

PRESENTATION KIOSKS AND DISPLAYS

EYE-POINT® OUTDOOR HIGH BRIGHTNESS

Ref.	FOD-55HBVP	FOD-55HBVPD
Presentation height	1475 (middle screen)	1475 (middle screen)
Max. flat panel in mm	W 700 x D 150 x H 1120	W 700 x D 150 x H 1120
Mounting interface	L&S 5	2 x VESA + L&S 5
Power consumption	610 Watt	1300 Watt
Power supply	230 VAC 50-60Hz	230 VAC 50-60Hz
Max. surrounding temp.	-20°C to +35°C	-20°C to +35°C



Ref.	FOD-65HPVB	FOD-65HPVBD
Presentation height	1580 (middle screen)	1580 (middle screen)
Max. flat panel in mm	W 700 x D 150 x H 1120	2 x W 700 x D 150 x H 1120
Mounting interface	L&S 5	2 x VESA + L&S5
Power consumption	610 Watt	1300 Watt
Power supply	230 VAC 50-60Hz	230 VAC 50-60Hz
Max. surrounding temp.	-20°C to +35°C	-20°C to +35°C



Ref.	FOD-75HBVP	FOD-75HPVBD
Presentation height	1690 (middle screen)	1690 (middle screen)
Max. flat panel in mm	W 800 x D 150 x H 1385	W 800 x D 150 x H 1385
Mounting interface	VESA + L&S 5	2 x VESA + L&S 5
Power consumption	650 Watt	1300 Watt
Power supply	230 VAC 50-60Hz	230 VAC 50-60Hz
Max. surrounding temp.	-20°C to +35°C	-20°C to +35°C



Suitable for full sunlight

Other screen sizes on request. Check www.audipack.com for an updated product range

ACCESSORIES**UNIFLATFIX PRO (UNIVERSAL FLAT PANEL BRACKETS)**

Lock the bracket with the optional lock
Ref.: 230052



Ref.	UFPRO-0500	UFPRO-0700	UFPRO-0800	UFPRO-0801	UFPRO-0900
Dimensions in mm	W 516 x D 32 x H 382	W 716 x D 32 x H 502	W 860 x D 32 x H 502	W 860 x D 39 x H 727	W 960 x D 39 x H 727
Max. mounting range in mm	W 470 x H 360	W 670 x H 446	W 810 x H 446	W 810 x H 671	W 910 x H 671
Min. mounting range in mm	W 125	W 125	W 130	W 120	W 120


Projector

mounts

Mount any brand and type of projector to any Audipack system.

Being one of the first to offer professional projector presentation accessories, Audipack products are state-of-the-art and are proven high quality.

The Audipack range of projector accessories and system varies from standard products, such as ceiling mounts, lifts and housings, to custom-built stack frames and flight cases with integrated lift systems.

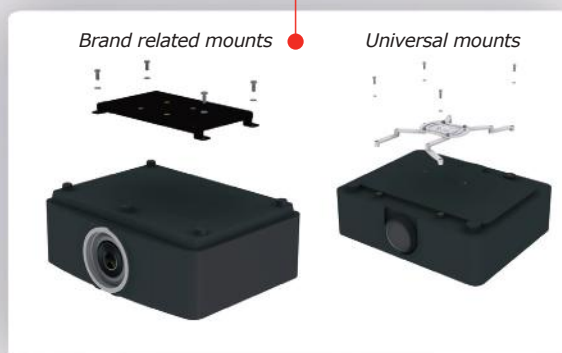

Audipack®

It's great to have solutions...

Mounts any **brands** and **type** of projector

With an Audipack projector mount, your projector is quickly and easily mounted to create a presentation solution. Audipack projector amounts are designed to precisely fit any brand or type of projector.

The interface makes it possible to swap projectors without the need to change the ceiling mount or lift. When necessary, switching the projector takes little time. Audipack designs and manufactures all mounts in- house and includes the manufacturers' recommendations in the product characteristics. The result is a perfect fit between mount and projector, ensuring the safest and most rigid product built.

QUATRO-FIX 1, 2 & 3

	Ref.	QFIX-1		
	Max. mounting range in mm	440		
	max. load	10-20 kg		
	Suitable for	Tube sets and products with ball-joint		
	Ref.	QFIX-2		
	Max. mounting range in mm	440		
	max. load	10-20 kg		
	Suitable for	Ceiling lifts		
	Ref.	QFIX-3		
	Max. mounting range in mm	100		
	max. load	20-30 kg		
	Suitable for	all purposes		

QUATRO-FIX 4 & 5

	Ref.	QFIX-4		
	Max. mounting range in mm	345 x 280		
	max. load	30 kg		
	Suitable for	large projector situations		
	Ref.	QFIX-5		
	mounting range in mm	min. 268 x 243 - max. 430 x 360		
	max. load	30 kg		
	Suitable for	large projector situations		

QUATRO-FIX 6 & 7

	Ref.	QFIX-6		
	mounting range in mm	min. 200 x 85 - max. 410 x 475		
	max. load	80 kg		
	Suitable for	large projector situations		
	Ref.	QFIX-7		
	Min - max mounting range in mm	200 x 85 - 620 - 735		
	Max. load	80 kg		
	Suitable for	large projector situations		

Ceiling mounts

for projectors

The projector is not only important element in a professional installation.

Features such as fast installation, easy adjustment and stability of any accessories are just as important.



Audipack®

It's great to have solutions...

Ultimate flexibility

with Audipack ceiling mounts



Quatro-Fix®, the allrounder

The Quatro-Fix projector mounts offers maximum flexibility to set up any projector up to 20kg within the most complex of installs.

The Quatro-Fix® ceiling mounts and the brand compatible mounts are equipped with a special newly designed ball joint that allows you to position the projector with minimal effort. The ball joint is designed to rotate from its own point of gravity. This results in a flexible and almost friction free adjustment capability.

UTS, for projector mounts and more.

Audipack also offers brand compatible projector mounts combined with the UTS (**U**niversal **T**ube **S**et) for any brand or type of projector, from stock. Brand compatible mounts are always a perfect fit and comply with manufacturers' installation guides and standards. For this type of ceiling mount an additional projector or camera mount is needed to complete the set.

UTS + brand related mount = the perfect solution



- ▲ **Rigid and safe construction**
- ▲ **Any configuration possible**
- ▲ **Very flexible**
- ▲ **Integrated cable ducts**




Angle adjustment



Perfect adjustment with telescopic feature



Cable passage



Cable passage

CEILING MOUNTS

QUATRO-FIX

Max. load



Mounting range in mm
440 in diameter



Angle adjustment in degrees 15° + 15°

Ref. QFIX-0100

Length in mm 100
Tube diameter in mm 54

**Ref. QFIX-0300**

Length in mm 300
Tube diameter in mm 54

**Ref. QFIX-0500T**

Length in mm 355-500
Tube diameter in mm 54-60

**Ref. QFIX-0700T**

Length in mm 450-700
Tube diameter in mm 54-60

**Ref. QFIX-1000T**

Length in mm 604-1000
Tube diameter in mm 54-60



QUATRO-FIX XL

Max. load



20 Kg.

30 kg



Mounting range in mm
W336 x D 382



Angle adjustment in degrees 15° + 15°

Ref. QFIX3-0100

Length in mm 100
Tube diameter in mm 54

**Ref. QFIX3-0300**

Length in mm 300
Tube diameter in mm 54

**Ref. QFIX3-0500T**

Length in mm 355-500
Tube diameter in mm 54-60

**Ref. QFIX3-0700T**

Length in mm 450-700
Tube diameter in mm 54-60

**Ref. QFIX3-1000T**

Length in mm 604-1000
Tube diameter in mm 54-60



UNIVERSAL TUBE SET

Ref. UTS-0100

Length in mm 100
Tube diameter in mm 54

**Ref. UTS-0300**

Length in mm 300
Tube diameter in mm 54

**Ref. UTS-0500T**

Length in mm 355-500
Tube diameter in mm 54-60

**Ref. UTS-0700T**

Length in mm 450-700
Tube diameter in mm 54-60

**Ref. UTS-1000T**

Length in mm 604-1000
Tube diameter in mm 54-60



Angle adjustment in degrees 15° + 15°

Quick Release,

the perfect **AV** solution ...

Look no further for a ceiling mount that allows the fast and easy exchange of projectors. The quick release ball joint allows swift and safe installation.



HEAVY DUTY PROJECTOR CEILING MOUNT



Ref.	390065
Length in mm	164
Tube diameter in mm	45
Angle adjustment in degrees	20° + 20°



Ref.	390061
Length in mm	697-937
Tube diameter in mm	45-50
Angle adjustment in degrees	20° + 20°



QUICK RELEASE PROJECTOR CEILING MOUNT



Ref.	392165
Length in mm	142
Tube diameter in mm	45
Angle adjustment in degrees	30° + 30°



Ref.	392161
Length in mm	675-915
Tube diameter in mm	45-50
Angle adjustment in degrees	30° + 30°





The **heavy duty** universal ceiling mount is a TÜV certified rigid and strong ceiling mount suited for suspending projectors up to 70 kg from the ceiling. The ceiling mount is standard equipped with the patented Audipack ball-joint, which features the unique possibility **to line out** the projector to the projection screen. De cable-outlets enable a neat and safe installation of all the necessary connections.



The **Quick Release** ceiling mounts are ergonomic solutions especially designed for rental and stage use. The special releasable ball joint allows the projector up to 50 kg to be **installed quickly without any tools**. The ingenious construction releases the ball joint adjustment and makes swapping and positioning the projector easy.



The **Quick Release Plus** projector ceiling mounts are ergonomic solutions designed for rental and stage use. The special releasable ball joint allows the projector up to 50 kg to be **installed quickly without any tools**. The ingenious construction releases the ball joint adjustment and makes swapping and positioning the projector easy.

The Plus version has an additional adjustment platform with **3 adjustment knobs**, with which the projector position can be adjusted highly accurate. Ideal for those who use more than 1 projector in one and the same set up!

QUICK RELEASE *PLUS* PROJECTOR CEILING MOUNT WITH 3D ADJUSTMENT



3D
ADJUSTMENT

Ref. **392365**

Length in mm	193
Tube diameter in mm	45
Angle adjustment in degrees	30° + 30°
Fine tune adjustment in degrees	-3°, +3°



Ref. **392361**

Length in mm	726-966
Tube diameter in mm	45-50
Angle adjustment in degrees	30° + 30°
Fine tune adjustment in degrees	-3°, +3°



Projector mount

for **vertical** positioning



An elegant and rigid solution for installing projectors to the ceiling, with the minimalistic design well known from the 800 series product line.

This mount is specially designed for projectors with a special lens that allow a vertical installation.

The ceiling mount is equipped with features to line out the projector to the projection screen. De cable management system in the tube enables a neat and safe installation of all the necessary connections.

The mounting interface has a square 90 mm pattern on which the projector can be mounted with additional cams **392618** for an easy installation without tools.

- ▲ **Slim and minimalistic design**
- ▲ **Easy cable management**
- ▲ **Available in many sizes**
- ▲ **Adjustable in height**

CEILING MOUNT FOR VERTICAL PROJECTION



CUSTOM-HEIGHT

Ref.	PCM-800-1000
Length in mm	1000
Tube	800 series with cable management
Angle adjustment in degrees	-3° + 7°
Mounting interface	L&S 4 - square pattern 90 mm



Ref.	PCM-800-XXXX
Length in mm	custom
Tube	800 series with cable management
Angle adjustment in degrees	-3° + 7°
Mounting interface	L&S 4 - square pattern 90 mm



ACCESSORIES

PROJECTOR MOUNTS

Mount any brand and type of projector on any Audipack system with the Audipack projector mounts.




Quatro-Fix®



Brand related mounts



EXTENSION TUBES (ONLY SUITABLE FOR HEAVY DUTY AND QUICK RELEASE TUBE SETS)



Diameter 45 mm.



Ref.

Length in mm

Length gain in mm

390022

750

350

390066

1000

600

390367

1250

850

390210

1500

1100

390321

1750

1350

390211

2000

1600

EQUIPMENT CABINET



For above ceiling installation



Ref.

Max. equipment dimensions in mm

EC-5

W 350 x D 350 x H 100

CEILING MOUNTS

SHOCK ABSORBER FOR CEILING MOUNTS



Ref.
Suitable for

392193
390065, 390061, 392165, 392161, 392365,
392361, 392665, 392661

3D ADJUSTMENT FOR BALL JOINTS



Ref.
Feature
Suitable for



BJ-3D1
3D fine tuning
Q-fix, UTC, UTS



BJ-3D1S
3D fine tuning & side shift
Q-fix, UTC, UTS



TRUSS MOUNTS



Ref.
Suitable for

TM-54
54 mm (Q-fix & UTS only)



TM-60 (Telescopic tube sets only)
60 mm (Q-fix & UTS only)



260140
All "39....." products

SEVERAL OPTIONS



Ref.
Type
Suitable for

390199
Manual rotation
All "39....." tube sets



392150
Construction clamp
All



399941
Stainless steel security cable

Truss mounts

for projectors

Audipack truss mounts, ideal for rental & staging

Audipack truss mounts offer flexible installation options and secure features



Safe and solid

truss mounting



Do you need easy and quick projector truss mounting? Use the Audipack truss mounts!

Audipack offers a wide range of truss mountable projector mounts and solutions. To address different applications, Audipack offers specific solutions, from a simple projector mount to sophisticated 3D adjustment features. The mounts allow a quick and safe installation to be performed every time.

The **UTC range** offers a universal but very flexible and well-designed mounting range for projectors up to 30kg. Light weight, tolerance free and with integrated ball joints for perfect screen alignment.

The **Quick release** product line is distinguished by its unique separable ball joint and is the safest way for installing projectors up to 52kg to trusses. After installing the tube set, just click the projector to the tube set - 'click and go'.

Align the projector to the screen with the ball joint or even with the optional 3D adjustment (**QR-plus**) or linear adjustment (**QR-plus+**); ideal for seamless projection.

- ▲ **Fine pitch, pixel on pixel adjustment**
- ▲ **Rigid and safe construction**
- ▲ **Any configuration possible**
- ▲ **Very flexible**
- ▲ **Integrated cable ducts**



399941
Stainless steel
security cable

Quick release, the perfect AV rental solution ...

Look no further for a ceiling mount that allows the fast and easy exchange of projectors. The quick release ball joint allows swift and safe installation. Especially designed for professional rental and stage use.



Perfect adjustment with
telescopic feature



Cable passage



Cable passage

TRUSS MOUNTS

TRUSS MOUNTS

TRUSS MOUNTS WITH STANDARD BALL JOINT

**Ref. UTC-0150B**

Length in mm	150
Angle adjustment in degrees	15° + 15°

**Ref. UTC-0300B**

Length in mm	300
Angle adjustment in degrees	15° + 15°

**Ref. UTC-1000TB**

Length in mm	604-1000
Angle adjustment in degrees	15° + 15°



QUICK RELEASE TRUSS MOUNT

**Ref. 392167**

Length in mm	252
Angle adjustment in degrees	30° + 30°

**Ref. 392166**

Length in mm	760-1000
Angle adjustment in degrees	30° + 30°



QUICK RELEASE PLUS TRUSS MOUNT WITH 3D ADJUSTMENT

**Ref. 392367**

Length in mm	303
Angle adjustment in degrees	30° + 30°
Fine tune adjustment in degrees	-3°, +3°

**Ref. 392366**

Length in mm	811-1051
Angle adjustment in degrees	30° + 30°
Fine tune adjustment in degrees	-3°, +3°



BJ-PRO PROJECTOR TRUSS MOUNT

**Ref. BJ-PRO-1 single truss hook**

Height in mm	330
Angle adjustment in degrees	25° / 0° / 25°
Fine tune adjustment in degrees	5° / 0° / 5°
Truss - diameter	50 mm

**Ref. BJ-PRO-2 double truss hook**

Height in mm	330
Angle adjustment in degrees	25° / 0° / 25°
Fine tune adjustment in degrees	5° / 0° / 5°
Truss - diameter	50 mm



TRUSS MOUNTS

PROJECTOR TRUSS MOUNT 800 SERIES

**Ref.**

Length in mm

Tube

Angle adjustment in degrees

Mounting interface

Compatibility

PTCV-800-XXXX

custom

800 series with cable management

-3° + 7°

L&S 4 - square pattern 90 mm

Audipack projector mounts

**CUSTOM-HEIGHT**

ACCESSORIES

PROJECTOR MOUNTS

Mount any brand and type of projector on any Audipack system with the Audipack projector mounts.



Quatro-Fix®



Brand related mounts

3D FINE TUNE ADJUSTMENT, ADD ON



Ref.
Suitable for
Description



BJ-3D1
UTC range
3D adjustment



BJ-3D1S
UTC range
3D adjustment and horizontal shift

QUICK RELEASE COUPLER




Ref.
Suitable for
Max. load



BJ-1QR
Q-fix, UTC, UTS
10 Kg



EXTENSION TUBES (SUITABLE FOR THE UTC)



Diameter 54 mm.



Ref.
Length in mm
Length gain in mm


ET-1000
1000
940

ET-1500
1500
1440

ET-2000
2000
1940

ET-2500
2500
2440

EXTENSION TUBES (ONLY SUITABLE FOR QUICK RELEASE TUBE SETS)



Diameter 45 mm.



Ref.
Length in mm
Length gain in mm

390022
750
350

390066
1000
600

390367
1250
850

390210
1500
1100

390321
1750
1350

390211
2000
1600

Short throw wall mounts

for projectors

The Audipack short throw wall mounts

are ideal to mount your projector directly on the wall or to an Audipack projection set up.



Audipack®

It's great to have solutions...

Easy installation with Audipack wall mounts



Audipack short throw wall mounts with universal projector mount is a most flexible yet durable solution.

Audipack short throw wall mounts have slim dimensions, a modern design and provide 100% tolerance free projector mounting. The easily accessible hidden cable ducts are ideal for hiding projector cabling and routing it to the wall.

The projector is mounted onto the famous Audipack Quatrofix, with a ball joint that allows for a rigid, steady projector mounting.

The short throw mount can be easily attached directly to the wall or onto a frame, whichever is the best solution for the projection screen.

- ▲ **Easy installation**
- ▲ **Rigid wall mounting**
- ▲ **Accurate projector adjustment**
- ▲ **Universal or brand related projector mounts**

SHORT THROW ARMS



Ref.	PWM-ST0600
Adjustment range in mm	360-600
Max. mounting range in mm	440 in diameter

Ref.	PWM-ST1200
Adjustment range in mm	960-1200
Max. mounting range in mm	440 in diameter

Ref.	PWM-ST0800T
Adjustment range in mm	500-800
Max. mounting range in mm	440 in diameter

Ref.	PWM-ST1500T
Adjustment range in mm	800-1500
Max. mounting range in mm	440 in diameter

Including Universal Quatro-Fix



WALL MOUNT



Ref.	PWM-0450
Length in mm	450

See page for 123 for a projector mount, to mount your projector




Stack- and rigging frames

for projectors

The Audipack stack and rigging frames

a sturdy solution to meet your needs

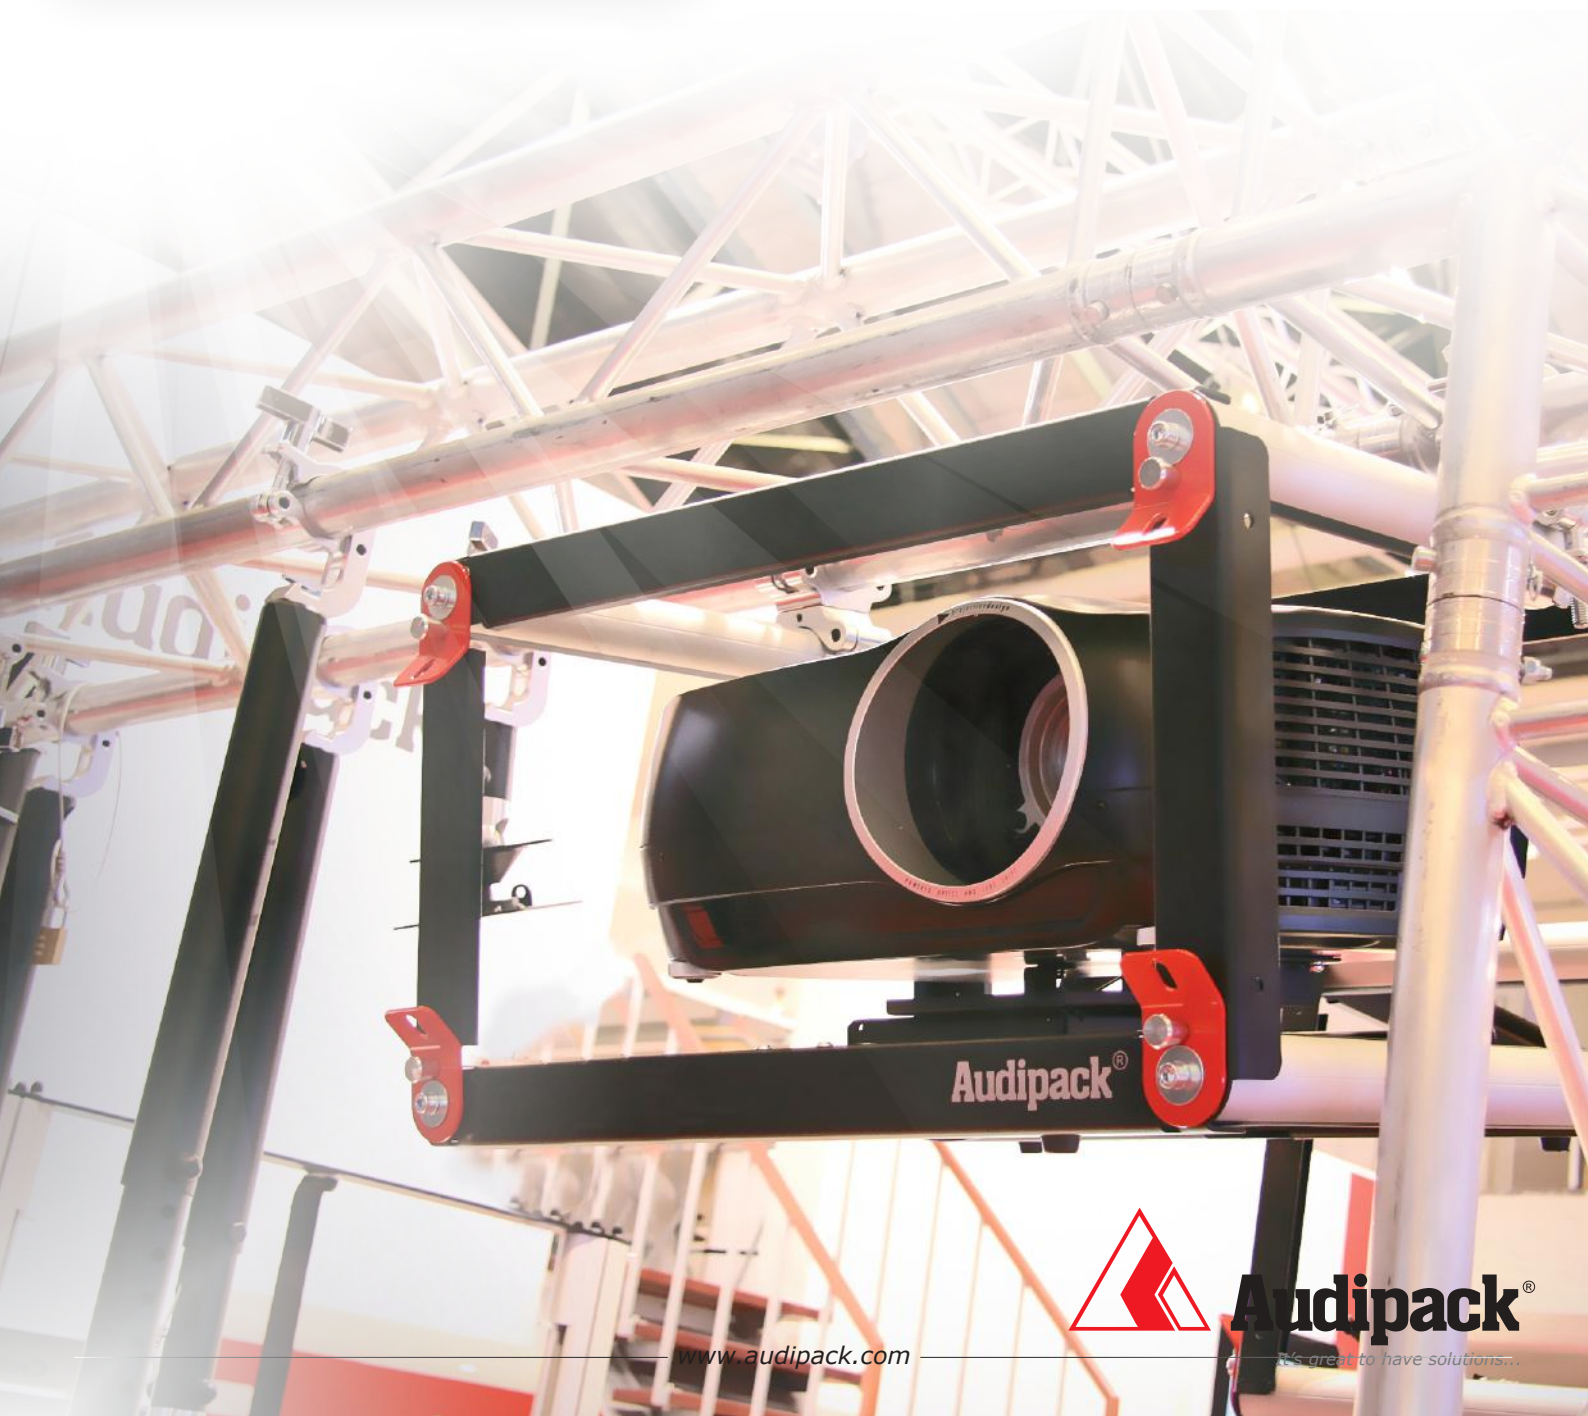

Audipack®

www.audipack.com

It's great to have solutions...

A **NEW** view on **projector rigging and stacking**

The Audipack PSF stack frame series is the safest way for handling a projector in rental and staging applications.

Audipack has developed a special lightweight frame that fits the projector like a glove. The strong, aluminium, light weight construction gives a good grip for lifting, table installation or installing the frame and projector to a truss.


The projector is fitted to the bottom frame on adjustable axes, which allow the projector to be lined up to the screen with high accuracy. Multiple frames can be easily connected and stacked for high output projection. The PSF stack-frames are available in standard sizes, and are also available in custom sizes on request.

- ▲ **New and modern design**
- ▲ **Lightweight 50 mm tubular construction**
- ▲ **Easy to adapt to any projector brand and type**
- ▲ **Integrated fine tune 3D adjustment**
- ▲ **Rotating mounting points for flying installation**
- ▲ **T-Slot mounting in tubes for accessory installation**
- ▲ **5 times overload Safety factor**
- ▲ **Custom models available on request**

Visit www.audipack.com for product wizard and list of models

Optional:

Double coupler truss clamp: **260210**
Stainless steel security cable: **399941**



STACK FRAMES



Order explanation:

PSF-608525

- Height size of the projector in cm.
- Depth size of the projector in cm.
- Width size of the projector in cm.
- Projector Stack Frame

***Note:**

To order your stack frame make sure that your projector including cables and lens fits in the internal dimensions of the stack frame



Ref.	PSF-374418	PSF-465422	PSF-504216	PFS-504718	PFS-505218	PFS-505620
Including extra space for max projector dimension	W 370 x D 440 x H 180	W 460 x D 540 x H 220	W 500 x D 420 x H 160	W 500 x D 470 x H 180	W 500 x D 520 x H 180	W 500 x D 560 x H 200
Ref.	PSF-547417	PSF-554422	PSF-578030	PFS-608525	PFS-655830	PFS-658530
	W 540 x D 740 x H 170	W 550 x D 440 x H 220	W 570 x D 800 x H 300	W 600 x D 850 x H 250	W 650 x D 580 x H 300	W 650 x D 850 x H 300

STACK FRAMES CLASSIC

Custom sizes available on request



Ref.	P3478	P5348	P5217	P5343	P2895	P3723
Max. projector dimensions in mm	W 320 x D 430 x H 170	W 400 x D 525 x H 235	W 500 x D 425 x H 160	W 520 x D 600 x H 255	W 570 x D 783 x H 243	W 570 x D 783 x H 293
Ref.	P3593	P3657	P5045	P5406	P5515	
Max. projector dimensions in mm	W 579 x D 641 x H 270	W 580 x D 860 x H 243	W 605 x D 565 x H 293	W 650 x D 860 x H 305	W 385 x D 1015 x H 385	

Projector housings



Projector housings, *because your projector*

must deliver under any circumstances ...

- ▲ **Protection of your projector**
- ▲ **Custom build**
- ▲ **Easy to install**
- ▲ **Easy access for service and maintenance**



General technical specifications:

- Constructed from light weight alloy aluminum
- Exchangeable HEPA filters
- Thermostatic controlled heating
- Thermostatic controlled ventilation
- Projector placed on drawer
- Air curtain heating (*Kryo*)
- Double roof (*Saharan* & optional for *Kryo*)
- Recirculating mini AC (*Saharan*)



The **hurricane, Kryo or Saharan** housings are specially designed to install projectors in outdoor applications or in projector hostile environments.

The latest generations of Audipack housings are unique of its kind and offer a perfect protective solution for any kind of projector.

Audipack offers 4 different builds each specified for a certain specific environment.

The **Hurricane** is a housing used in applications such as outdoor, partially covered, no direct sunlight.

The **Kryo** housing is construction technical equal but has an enhanced temperature module to be used in general outdoor positions with very low temperatures and usage in snow, mountains etc.

The **Saharan** housing is suitable for outdoor projection in warm, dusty environments, not covered or shady environments with direct sunlight and high UV radiation.

The **Pollutio** housing is a special enclosure to protect and use projectors in production environments and polluted air with dirt particles.

In general these 4 housing types are in basic all build equally but enhanced at specific parts to fit their application.





PROJECTOR OUTDOOR HOUSING HURRICANE

Ref.	POH-HXXXXXX
Application area	General outdoor, shady environments, preferabel under roof, dusty, wind
Max. temperature range	-20 up to +30 Celcius
Power consumption	Approx. 150 watt.



PROJECTOR OUTDOOR HOUSING SAHARAN

Ref.	POH-SXXXXXX
Application area	High temperatures, no shadow, high UV, dusty, wind
Max. temperature range	-20 up to +30 Celcius
Power consumption	Approx. 150 - 500 watt.



PROJECTOR OUTDOOR HOUSING KYRO

Ref.	POH-KXXXXXX
Application area	Low temperatures, yes / no shadow, high UV, snow, cold, dusty, wind
Max. temperature range	-20 up to +30 Celcius
Power consumption	Approx. 150 - 250 watt.



PROJECTOR OUTDOOR HOUSING POLLUTIO

Ref.**POH-PXXXXXX**

Application area

General outdoor, shady environments, preferabel under roof, dusty, wind

Max. temperature range


0 up to +25 Celcius

Power consumption

Approx. 100 watt.

Projector housings,

to ensure branding and special effects

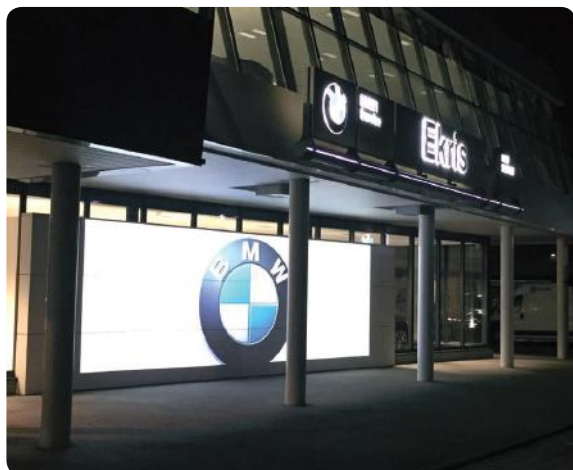


Projectors are more often used outdoors for branding and special effects on buildings and for events.

Audipack has a lot of experience in building protective housings. We custom-build them for many projector brands and types. Our technicians can tell you what is necessary in your situation.

Indoor events

Theaters, museums and many other events use projectors for projection of images and special effects. Audipack's Silencers ensures that visitors enjoy the show without disturbing noise.

All silencing projector housings are tested to check the noise reduction. You receive a full report of the testing results.

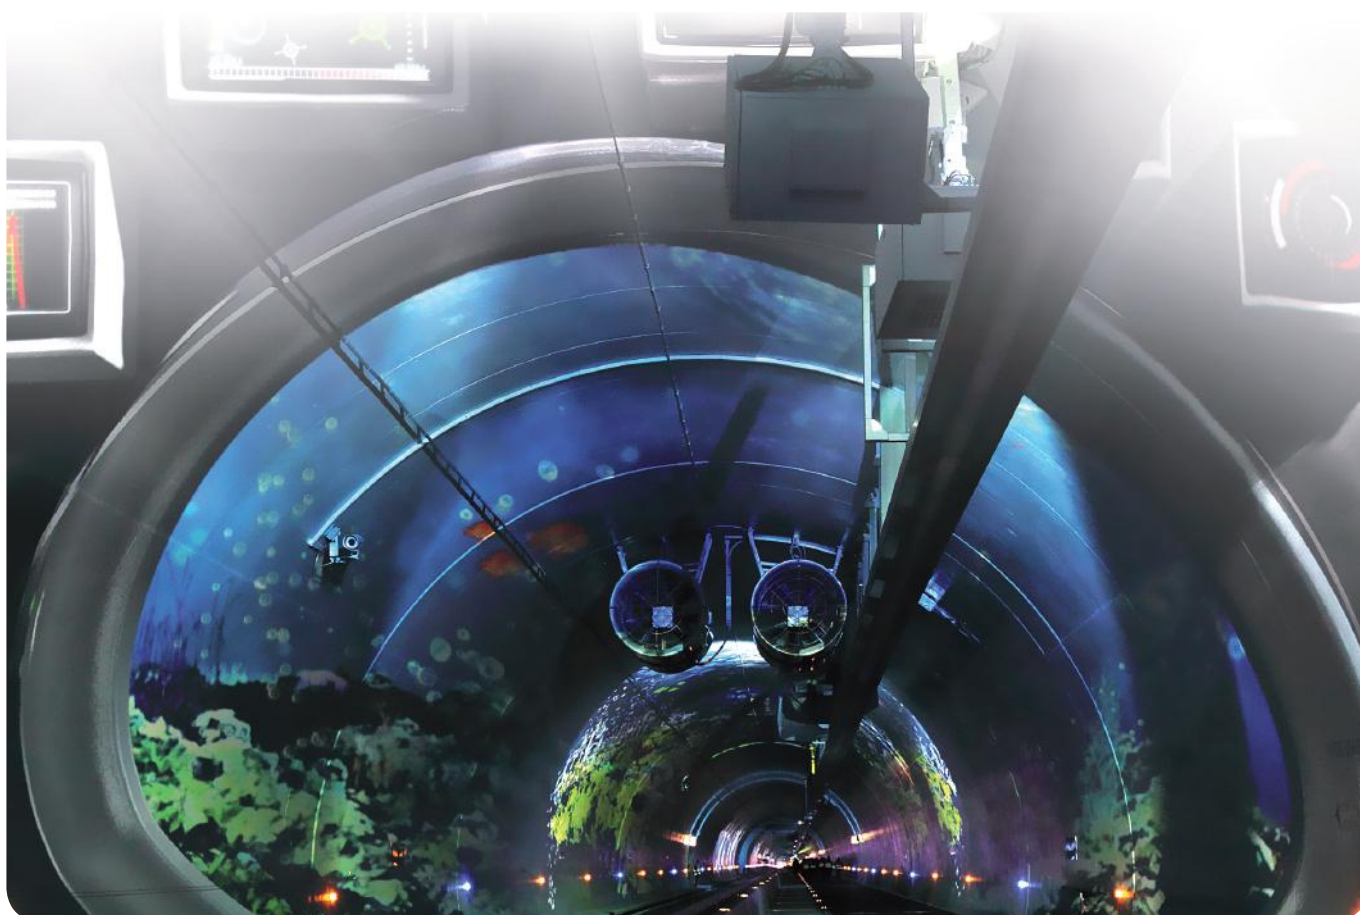



Custom housings in any environment

Projector or equipment housings can be made for any application, cold, rocky, moist, hot and noise cancelling. Audipack uses her 30 years of proven experience of building custom housings.



Silencing housings

Projectors produce noise. In some situations too much noise is not acceptable. A Silencing housing is a perfect solution to solve the problem.

Gain maximum result of your projector in any application. Special adapted airflow and ventilation make sure the projector inhales fresh air and exhausts the hot air. In this way the best balance between sound insulation and ventilation has been reached at low costs. The Silencer is equipped with special fans and a special projection glass window in front of the projector lens. The housing reduces audible noise by approx. 16 – 20 dBA. It is suitable for inside use only and is available in the standard colours black, white or grey. Other colours are available on request. The projector is mounted with a standard Audipack projector mount in the silencer.

Please visit our product wizard on www.audipack.com for an updated model list.



Ceiling lift systems

for projectors

Integration of projectors into the ceiling

For example, in a board room, home cinema, auditorium or conference hall

The interior finish looks more streamlined with the projector out of sight – and the equipment is more secure



The solution for **integrating** projectors in **ceilings**

The Audipack projector lift systems have a reputation as durable systems for lowering a projector from the ceiling.

These ceiling lift systems are the perfect solution for integrating projectors into ceilings in board rooms, home cinemas, auditoriums and conference halls. Not only does the interior look better but the projector is less prone to theft.

Well-made and safe, the Audipack ceiling lift system requires little maintenance. With each use, the lift moves precisely to its pre-set position, every time. You can be confident that the projected image will centre perfectly on the screen.



3rd service position (Various lift systems are supplied with this feature)
With the 3rd service position it is possible to let the projector run through the maximum length.


This length is determined by the number of scissors that the lift is provided.

1 - Stored position 2 - Presentation position 3 - Service position



- ▲ **Durable build**
- ▲ **Low maintenance**
- ▲ **Quick installation**
- ▲ **Low noise engine**

Technical information:

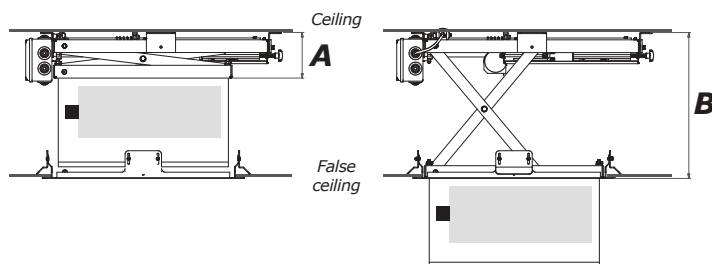

A) Construction height

distance from top to bottom of lift when fully retracted
(projector, projector mount and ceiling finishing mask not included)

B) Overall stroke

distance from top to bottom of lift when fully extended
(projector, projector mount and ceiling finishing mask not included)



Safety device



Accurate projector positioning



Ceiling finishing



Smooth finishing

PCL-X355 SCISSOR LIFT SYSTEMS Movable frame dimensions: **W 490 x D 490 mm****Including white ceiling finishing mask**

Power supply:

110-230 VAC 50-60 Hz/24 VDC**Ref.****PCL-X355-1**

Overall stroke in mm

370

Dimensions in mm

W 590 x D 490 x H 90

Number of scissors

1

Nett weight

11 Kg

Connectivity

Contact relay

Optional wall switch or IR/RF remote

**Ref.****PCL-X355-2**

Overall stroke in mm

700

Dimensions in mm

W 590 x D 490 x H 115

Number of scissors

2

Nett weight

13 Kg

Connectivity

Contact relay

Optional wall switch or IR/RF remote



CEILING LIFT SYSTEMS

PCL-3050 SCISSOR LIFT SYSTEMS Movable frame dimensions: **W 450 x D 590 mm**

Very silent lift system



Including white ceiling finishing mask
Power supply: **230 VAC 50-60 Hz**

Ref.	PCL-3050-1
Overall stroke in mm	500
Dimensions in mm	W 571 x D 707 x H 115
Number of scissors	1
Nett weight	26 Kg
Connectivity	Contact relay Optional wall switch or IR/RF remote



Ref.	PCL-3050-2
Overall stroke in mm	985
Dimensions in mm	W 571 x D 707 x H 170
Number of scissors	2
Nett weight	27 Kg
Connectivity	Contact relay Optional wall switch or IR/RF remote



Ref.	PCL-3050-3
Overall stroke in mm	1445
Dimensions in mm	W 571 x D 707 x H 200
Number of scissors	3
Nett weight	28 Kg
Connectivity	Contact relay Optional wall switch or IR/RF remote



Ref.	PCL-3050-4
Overall stroke in mm	1910
Dimensions in mm	W 571 x D 707 x H 240
Number of scissors	4
Nett weight	29 Kg
Connectivity	Contact relay Optional wall switch or IR/RF remote

**PCL-5050 SCISSOR LIFT SYSTEMS** Movable frame dimensions: **W 560 x D 560 mm**

Very silent lift system



**Fits directly
a standard 600x600
ceiling tile cut-out**



Including white ceiling finishing mask
Power supply: **230 VAC 50-60 Hz**

Ref.	PCL-5050-1
Overall stroke in mm	490
Dimensions in mm	W 691 x D 688 x H 115
Number of scissors	1
Nett weight	25 Kg
Connectivity	Contact relay Optional wall switch or IR/RF remote



Ref.	PCL-5050-2
Overall stroke in mm	900
Dimensions in mm	W 691 x D 688 x H 155
Number of scissors	2
Nett weight	27,5 Kg
Connectivity	Contact relay Optional wall switch or IR/RF remote



Ref.	PCL-5050-3
Overall stroke in mm	1350
Dimensions in mm	W 691 x D 688 x H 200
Number of scissors	3
Nett weight	30 Kg
Connectivity	Contact relay Optional wall switch or IR/RF remote



Ref.	PCL-5050-4
Overall stroke in mm	1800
Dimensions in mm	W 691 x D 688 x H 230
Number of scissors	4
Nett weight	33,5 Kg
Connectivity	Contact relay Optional wall switch or IR/RF remote



PCL-5070 SCISSOR LIFT SYSTEMS Movable frame dimensions: **W 560 x D 700 mm**

**Including
3rd service
position**

Including white ceiling finishing maskPower supply: **230 VAC 50-60 Hz**

Connectivity: contact relay,

Optional: wall switch or IR/RF remote

Ref.	PCL-5070-1		
Overall stroke in mm	550		
Built-in height	150		
Number of scissors	1		
Ref.	PCL-5070-2		
Overall stroke in mm	1100		
Built-in height in mm	180		
Number of scissors	2		
Ref.	PCL-5070-3		
Overall stroke in mm	1620		
Built-in height in mm	210		
Number of scissors	3		
Ref.	PCL-5070-4		
Overall stroke in mm	2140		
Built-in height in mm	235		
Number of scissors	4		
Ref.	PCL-5070-5		
Overall stroke in mm	2660		
Built-in height in mm	270		
Number of scissors	5		
Ref.	PCL-5070-6		
Overall stroke in mm	3180		
Built-in height in mm	300		
Number of scissors	6		
Ref.	PCL-5070-7		
Overall stroke in mm	3700		
Built-in height in mm	335		
Number of scissors	7		
Ref.	PCL-5070-8		
Overall stroke in mm	4200		
Built-in height in mm	365		
Number of scissors	8		
Ref.	PCL-5070-9		
Overall stroke in mm	4680		
Built-in height in mm	390		
Number of scissors	9		
Ref.	PCL-5070-10		
Overall stroke in mm	5380		
Built-in height in mm	425		
Number of scissors	9		

1060 SCISSOR LIFT SYSTEMSMovable frame dimensions: **W 570 x D 900 mm**

**Optional ceiling finishing mask,
Ref: P3136 (CFM-1060) see page 142**

Power supply: **230 VAC 50-60 Hz**

Ref.	P1982		
Overall stroke in mm	675		
Dimensions in mm	W 630 x D 1117 x H 110		
Number of scissors	1		
Nett weight	44 Kg		
Connectivity	Contact relay Optional wall switch or IR/RF remote		
Ref.	P3610		
Overall stroke in mm	1200		
Dimensions in mm	W 630 x D 1117 x H 165		
Number of scissors	2		
Nett weight	45 Kg		
Connectivity	Contact relay Optional wall switch or IR/RF remote		

CEILING LIFT SYSTEMS

1070 SCISSOR LIFT SYSTEMS

Movable frame dimensions: **W770 x D900 mm**

Connectivity: Contact relay
Optional wall switch or IR/RF remote



Including 3rd service position

Optional ceiling finishing mask,
Ref: P3733 (CFM-1070) see page 142


Power supply: **230 VAC 50-60 Hz**

Ref.	P1983			
Overall stroke in mm	776			
Dimensions in mm	W770 x D1017 x H160			
Number of scissors	1	Nett weight	57 Kg	Max. 100
Ref.	P3612			
Overall stroke in mm	1455			
Dimensions in mm	W770 x D1017 x H210			
Number of scissors	2	Nett weight	61 Kg	Max. 100
Ref.	P3613			
Overall stroke in mm	2130			
Dimensions in mm	W770 x D1017 x H237			
Number of scissors	3	Nett weight	65 Kg	Max. 100
Ref.	P3614			
Overall stroke in mm	2805			
Dimensions in mm	W770 x D1017 x H260			
Number of scissors	4	Nett weight	69 Kg	Max. 100
Ref.	P3615			
Overall stroke in mm	3480			
Dimensions in mm	W770 x D1017 x H290			
Number of scissors	5	Nett weight	73 Kg	Max. 100
Ref.	P3616			
Overall stroke in mm	4170			
Dimensions in mm	W770 x D1017 x H325			
Number of scissors	6	Nett weight	77 Kg	Max. 100
Ref.	P3617			
Overall stroke in mm	4785			
Dimensions in mm	W770 x D1017 x H355			
Number of scissors	7	Nett weight	81 Kg	Max. 100
Ref.	P3618			
Overall stroke in mm	5460			
Dimensions in mm	W770 x D1017 x H382			
Number of scissors	8	Nett weight	85 Kg	Max. 100

1090 SCISSOR LIFT SYSTEMS

Movable frame dimensions: **W 815 x D 1000 mm**

Connectivity: Contact relay
Optional wall switch or IR/RF remote

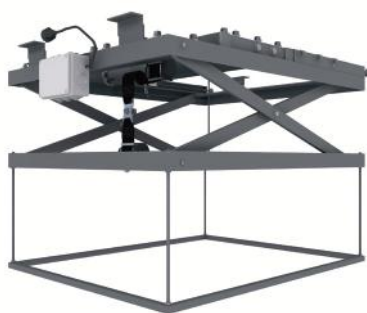

Including 3rd service position

Optional ceiling finishing mask,
Ref: P3732 (CFM-1090) see page 142

Power supply: **230 VAC 50-60 Hz**

Ref.	P1984			
Overall stroke in mm	700			
Dimensions in mm	W 815 x D 1117 x H 185			
Number of scissors	1	Nett weight	67 Kg	Max. 300
Ref.	P3602			
Overall stroke in mm	1522			
Dimensions in mm	W 815 x D 1117 x H 235			
Number of scissors	2	Nett weight	71 Kg	Max. 300
Ref.	P3603			
Overall stroke in mm	2100			
Dimensions in mm	W 815 x D 1117 x H 255			
Number of scissors	3	Nett weight	75 Kg	Max. 290
Ref.	P3604			
Overall stroke in mm	2800			
Dimensions in mm	W 815 x D 1117 x H 285			
Number of scissors	4	Nett weight	79 Kg	Max. 280
Ref.	P3605			
Overall stroke in mm	3500			
Dimensions in mm	W 815 x D 1117 x H 315			
Number of scissors	5	Nett weight	83 Kg	Max. 270
Ref.	P3606			
Overall stroke in mm	4200			
Dimensions in mm	W 815 x D 1117 x H 345			
Number of scissors	6	Nett weight	87 Kg	Max. 260
Ref.	P3607			
Overall stroke in mm	4900			
Dimensions in mm	W 815 x D 1117 x H 375			
Number of scissors	7	Nett weight	91 Kg	Max. 250
Ref.	P3608			
Overall stroke in mm	5600			
Dimensions in mm	W 815 x D 1117 x H 420			
Number of scissors	8	Nett weight	95 Kg	Max. 240

SCISSOR LIFT WITH INTEGRATED ROTA-KITMovable frame dimensions: **W 700 x D 700 mm**Power supply: **230 VAC 50-60 Hz****Ref.****P3310**


Overall stroke in mm
Dimensions in mm
Number of scissors
Connectivity

1275
W 822 x D 811 x H 375
2
Contact relay
Optional wall switch or IR/RF remote

**Ref.****P5357**

Overall stroke in mm
Dimensions in mm
Number of scissors
Connectivity

2300
W 822 x D 811 x H 430
4
Contact relay
Optional wall switch or IR/RF remote

**ACCESSORIES****SERVICE HATCHES**Internal hatch dimensions:
430 x 430 mmRef. **P1913**Ref. **P5066****SILENCER MOUNTING BRACKET**Ref.
Suitable for
Max. weight

P7010
1070 & 1090
70 Kg



P6491
1090
125 Kg

CEILING FINISHING MASKRef.
Suitable for

P3136 (CFM-1060)
1060




P3733 (CFM-1070)
1070

P3732 (CFM-1090)
1090

CEILING LIFT SYSTEMS

CONNECTIVITY

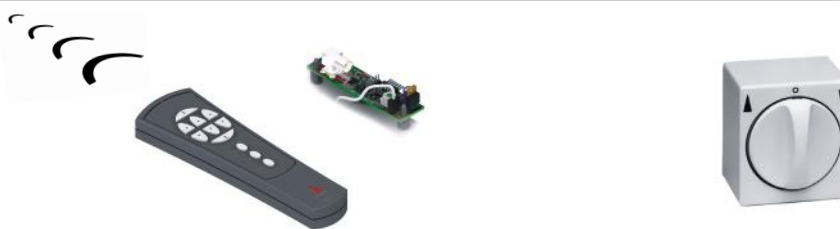

Ref.
Description

260214
IR remote (internal)

260215
RF remote (internal)

261318
Wall switch

SHOCK ABSORBER, SET OF 4




Absorbs disturbing vibrations caused by traffic, air conditioner systems etc. Only suitable for PCL lifts.



Ref.

P5547

SPACER FRAME



With large internal spacings between the structural ceiling and false ceiling, it is better to use a spacer frame to position your Audipack product just above the false ceiling.

Installing your product with long windings or rods ends up in an unstable and flexible set-up. Using the spacer frame prevents choosing large lift systems with long travels and saves costs at the end.

Pulley service lift systems

for projectors

Integrate a projector in the ceiling,

for example, in a board room, auditorium or conference hall.

These lift systems are especially designed to lower projectors from the ceiling for fast maintenance in a safe and controlled manner.



Bring projectors to *service* height

in **10 minutes...**



Save time and money by using the Audipack pulley lift systems

These lift systems are especially designed to lower projectors from the ceiling for fast maintenance in a safe and controlled manner.

The projector receives power and data signals through special connectors, which are disconnected when it is lowered and which restore contact when the lift is fully retracted. You can even connect HD signals with the standard supplied connector sets.

Pulley lifts are equipped with safety hooks to secure the projector in the retracted position. The projector will return to this exact position in the ceiling thanks to four centring points on the lift, ensuring the correct position of the projected image.

All this contributes to a safer, more flexible way of presenting and servicing.

The combination lift systems are available as standard in two models, in different sizes and lifting capacities.

An Audipack projector mount is needed to fix the projector to the system.

Note:

For distribution HD signal use standard available "long distance HDMI twisted pair extender" solutions!

- ▲ **Durable built**
- ▲ **Low maintance**
- ▲ **Quick installation**
- ▲ **Low noise engine**

Standard connector configuration

Top D-sub connector


1-phase 230 V 16 A with 1 early make, late break ground pin

Middle & lower connector

6 coaxial contacts 75 Ohm

1 early make, late break ground pin

17 signal pins

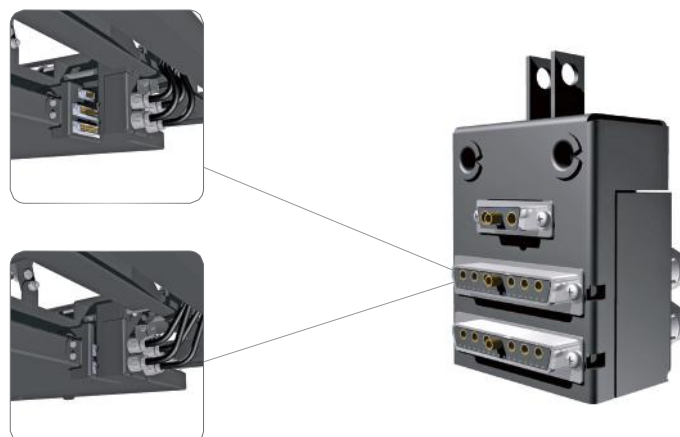

SERVICE LIFT SYSTEMS

**Ref.****P2687**

Dimensions in mm.
Max. projector size in mm
Max. service stroke in mm
Number of cables

W 400 x D 630 x H 225
W 500 x D 600
4000
2

**Ref.****P2271**

Dimensions in mm.
Max. projector size in mm
Max. service stroke in mm
Number of cables

W 770 x D 980 x H 230
W 650 x D 800
6000
4



Connectivity

Contact relay

Power supply: **230 VAC 50-60 Hz**

SERVICE AND SCISSOR COMBINATION LIFT SYSTEMS

Connectivity: Contact relay
Optional wall switch or
IR/RF remote (not for service stroke)

Max. projector size **W 500 x D 600 mm****Ref.****P1678**

Dimensions in mm.
Max. scissor stroke in mm
Number of scissors
Max. service stroke in mm
Number of cables

W 762 x D 770 x H 265
1070
2
4000 mm
2

**Ref.****P3802**

Dimensions in mm.
Max. scissor stroke in mm
Number of scissors
Max. service stroke in mm
Number of cables

W 762 x D 770 x H 305
2085
4
4000 mm
2

**Ref.****P3804**

Dimensions in mm.
Max. scissor stroke in mm
Number of scissors
Max. service stroke in mm
Number of cables

W 762 x D 770 x H 385
3100
6
4000 mm
2



Connectivity: Contact relay
Optional wall switch or
IR/RF remote (not for service stroke)

Max. projector size **W 650 x D 800 mm****Ref.****P2685**

Dimensions in mm
Max. scissor stroke in mm
Number of scissors
Max. service stroke in mm
Number of cables

W 976 x D 770 x H 305
700
1
6000 mm
4

**Ref.****P3806**

Dimensions in mm
Max. scissor stroke in mm
Number of scissors
Max. service stroke in mm
Number of cables

W 976 x D 770 x H 305
1400
2
6000 mm
4

**Ref.****P3808**

Dimensions in mm
Max. scissor stroke in mm
Number of scissors
Max. service stroke in mm
Number of cables

W 976 x D 770 x H 305
2800
4
6000 mm
4

**Ref.****P3810**

Dimensions in mm
Max. scissor stroke in mm
Number of scissors
Max. service stroke in mm
Number of cables

W 976 x D 770 x H 305
4200
6
6000 mm
4

**Ref.****P3812**

Dimensions in mm
Max. scissor stroke in mm
Number of scissors
Max. service stroke in mm
Number of cables

W 976 x D 770 x H 305
5600
8
6000 mm
4

Power supply: **230 VAC 50-60 Hz**

Mirror-Kit systems

for projectors

Mirror-Kit systems for projectors

For the integration of projectors in the ceiling,

for example in the board room, home cinema, auditorium or conference hall.

The interior finish looks more streamlined with the projector out of sight – and the noise is reduced



Integration of a projector

into the Ceiling...



or in a cabinet or table, so that the projector is out of sight and less audible!


The Mirror-Kit is a practical and durable solution for the integration of a projector into the ceiling. For example in a boardroom, home cinema, auditorium or conference hall.

The projector is fixed permanently above the ceiling, resulting in less noise to detract from the presentation and invisibility of the projector.

Audipack Mirror-Kits are available in various dimensions and versions. They are available in dynamic (motorised) and static (non-motorised) versions.

How does it work

The Mirror-Kit works like a periscope. The projected image from the projector is deflected by two highly reflective mirrors onto the projection screen. The larger, lower mirror is motorised and can be activated by a general control system.

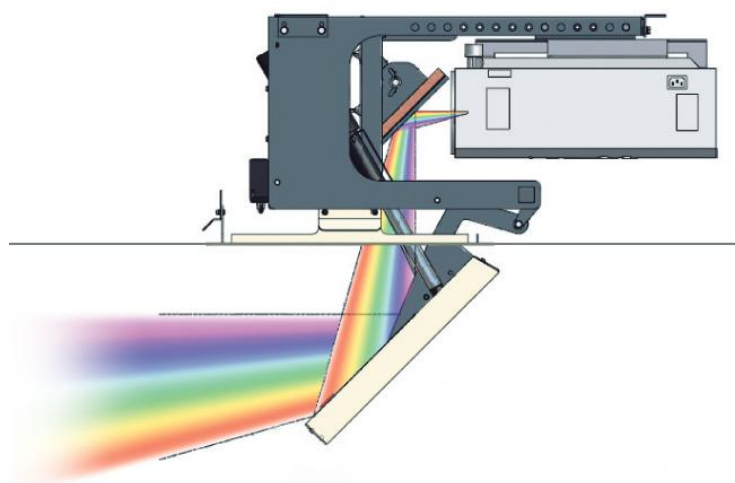

- ▲ **Motorized table and ceiling versions**
- ▲ **Static ceiling versions**
- ▲ **Quick installation**
- ▲ **Low noise engine**



Table Mirror-Kit versions available



Standard ceiling finishing



Special projection mirror

WIDE SCREEN MOTORIZED CEILING MIRROR-KITS



Power supply:

110-230 VAC 50-60 Hz/24 VDC

Ref.	MKT-150WS
Dimensions in mm	W 620 x D 741 x H 368
Max. projector dimensions in mm	W 500 x D 600 x H 150
Min. allowed lens ratio from approx.	1.3:1
Nett weight	35 Kg
Aspect ratio	4:3, 16:9, 16:10
Connectivity	Contact relay, Optional: wall switch or IR/RF remote



Ref.	MKT-200WS
Dimensions in mm	W 660 x D 751 x H 418
Max. projector dimensions in mm	W 500 x D 600 x H 200
Min. allowed lens ratio from approx.	1.3:1
Nett weight	37 Kg
Aspect ratio	4:3, 16:9, 16:10
Connectivity	Contact relay, Optional: wall switch or IR/RF remote



Ref.	MKT-250WS
Dimensions in mm	W 650 x D 751 x H 470
Max. projector dimensions in mm	W 550 x D 650 x H 250
Min. allowed lens ratio from approx.	1.3:1
Nett weight	26 Kg
Aspect ratio	4:3, 16:9, 16:10
Connectivity	Contact relay, Optional: wall switch or IR/RF remote



Ref.	MKT-265WS
Dimensions in mm	W 735 x D 1040 x H 500
Max. projector dimensions in mm	W 600 x D 650 x H 265
Min. allowed lens ratio from approx.	1.3:1
Nett weight	60 Kg
Aspect ratio	4:3, 16:9, 16:10
Connectivity	Contact relay, Optional: wall switch or IR/RF remote



COMPACT MOTORIZED MIRROR-KIT



Ref.	MKT-C150
Dimensions in mm	W 560 x D 790 x H 211
Max. projector dimensions in mm	W 465 x D 450 x H 150
Min. allowed lens ratio from approx.	1.3:1
Aspect ratio	4:3, 16:9, 16:10
Connectivity	Contact relay Optional wall switch or IR/RF remote



STATIC CEILING MIRROR-KITS (NON-MOTORIZED)



Ref.	MKT-S195
Dimensions in mm	W 415 x D 555 x H 325
Mirror dimensions	Square W 300 x H 250
Min. / Max. projector height in mm	95 / 195
Max. allowed lens ratio from aprox.	1.3:1
Nett weight	8 Kg
Aspect ratio	4:3, 16:9, 16:10



Ref.	P2883*
Dimensions in mm	W 150 x D 150 x H 480
Mirror dimensions	Square W 250 x H 250
Min. / Max. projector height in mm	95 / 200
Nett weight	12 Kg
Aspect ratio	4:3, 16:9, 16:10



* The projector is mounted vertically and must be able to work in that position

MIRROR-KIT SYSTEMS

FLOOR PROJECTION UNIT



Ref.

P2817

Dimensions in mm

W 465 x D 250 x H 225-260

Mirror dimensions in mm

Square W 200 x H 200

Nett weight

10 Kg

Aspect ratio

4:3, 16:10

Max. lens offset in mm

90



To be used with the Audipack ceiling mounts **390061** and **390065**, page 127.

ACCESSORIES

PROJECTOR MOUNTS

Mount any brand and type of projector on any Audipack system with the Audipack projector mounts.



Quatro-Fix3®



Brand related mounts



CONNECTIVITY



261436

External 1-channel RF remote set.



260214

IR remote control (internal)



260215

RF remote control (internal)



261318

Wall switch

SERVICE HATCHES

Internal hatch dimensions:
430 x 430 mm



Ref.

P1913

Type

Service hatch for normal ceilings

P5066

Service hatch for plastered ceilings

Pop up lift systems

for projectors

The Audipack projector Pop Up lift system

lets your projector pop up out of your desk, cabinet or table



Audipack®

It's great to have solutions...

Projector *Pop up* lift systems

for your **convenience**



Why not integrate your projector into the table and lift it from below when needed?

A projector is essential in any conference table boardroom or home cinema. However it's not always in use and can get in the way, or be tempting to steal, when not needed.

Audipack projector Pop Up lift systems are the easy to install solution for this problem. They are available in three different sizes and are fully positioning.

To control the system other than relays contact, please select from the below list.

Ref. 260214 (Internal IR remote control set)

Ref. 260215 (Internal RF remote control set)

Ref. 261318 (Wall switch)

- ▲ **Plug & Play**
- ▲ **Low maintenance**
- ▲ **Quick installation**
- ▲ **Silent motor drive**

PROJECTOR POP UP LIFT SYSTEMS



Power supply:

110-230 VAC 50-60 Hz/24 VDC

Ref. M-1-400

Max. stroke in mm	400
Projector platform in mm	W 400 x D 500
Construction height in mm	150
Number of scissors	1



Ref. M-1-500

Max. stroke in mm	500
Projector platform in mm	W 400 x D 600
Construction height in mm	150
Number of scissors	1



Ref. M-2-900

Max. stroke in mm	900
Projector platform in mm	W 400 x D 600
Construction height in mm	250
Number of scissors	2



Liftomatic® rental systems

for projectors

Above the crowd - with the Audipack Liftomatic®



Ease of *transport*,

ease of *Presentation!*



Liftomatics are the ideal all-in-one solution for transporting, lifting and presenting.

The only effort required is to remove the lid and connect the Liftomatic to a power outlet. The integrated lift raises the projector to its presentation position.

Using the Liftomatic reduces the risk of personal injury and equipment damage, as well as the time needed for installation. The integrated electric platform tilt mechanism allows the projector to be lined up perfectly with the projection screen.

- ▲ **Anti pinching security device**
- ▲ **Electric platform angle adjustment**
- ▲ **Low maintenance**
- ▲ **Supplied with rigid brake/swivel castors**



Integrated stabilizer
(Liftomatic HE-3000)



Control panel

MANUAL LIFTOMATIC®



Ref.	HM-2000
Max. lift height in mm	2000
Platform size in mm	W 520 x D 1010
Number of scissors	2



Accessory compartment



Manual pump



LIFTOMATIC RENTAL SYSTEMS, ELECTRIC HYDRAULIC



Ref.	T-1900
Max. lift height in mm	2050
Platform size in mm	W 640 x D 1030
Stabilizers	no
Number of scissors	2
Angle adjustment	-2 to +10 degrees



Ref.	HE-2000
Max. lift height in mm	2250
Platform size in mm	W 720 x D 1290
Stabilizers	no
Number of scissors	2
Angle adjustment	-2 to +10 degrees



Ref.	HE-3000
Max. lift height in mm	3000
Platform size in mm	W 720 x D 1290
Stabilizers	yes
Number of scissors	3
Angle adjustment	-2 to +10 degrees



Rota-Kit®

rotates your projector

The Rota-Kit,

*helps you position your projector in any direction with
just one push of a button*



Audipack®

It's great to have solutions...

Rotate your projector in every direction



Turn any room into a multi-functional space by rotating your projector.

Rota-Kit is an electric rotating system with 4 freely reprogrammable pre-set positions.

A contact control allows the projector to be rotated to one of the four preset positions, for flexibility of the projection direction.

The Rota-Kit comes in three standard versions, with different tube lengths.

- ▲ **Accurate repositioning**
- ▲ **Compact system dimensions**
- ▲ **Slow start and slow stop motion**
- ▲ **Available in several lengths**

ACCESSORIES

To control the system other than through relay contact:

Ref. 260214 (Internal IR remote control set, 2 positions)

Ref. 260215 (Internal RF remote control set, 2 positions)


Ref. 261227 (External IR remote control set, 4 positions)

Ref. 261228 (External RF remote control set, 4 positions)

Ref. P3630

Installation aid for accurate installation

Also suitable for metal supported ceilings



To install your projector to an Audipack product an additional projector mount is needed.
See "Projector mounts" section on page 121 for an overview of the available projector mounts.

ROTA-KIT

Connectivity: Contact relay, RS-232
Optional IR/RF remote



Power supply:

110-230 VAC 50-60 Hz/24 VDC

Ref.	PRK-250
Built-in height in mm	200
Tube length in mm	50
Dimensions in mm	W 373,3 x D 332 x H 250



Ref.	PRK-500
Built-in height in mm	200
Tube length in mm	300
Dimensions in mm	W 373,3 x D 332 x H 500



Ref.	PRK-750
Built-in height in mm	200
Tube length in mm	550
Dimensions in mm	W 373,3 x D 332 x H 750



ROTA-KIT XL



Ref.	PRK-500XL
Built-in height in mm	200
Tube length in mm	50
Dimensions in mm	W 424 x D 409 x H 500



Ref.	PRK-750XL
Built-in height in mm	200
Tube length in mm	300
Dimensions in mm	W 466 x D 409 x H 750



Tablet housings


Tablet housings,

a smart solution for digital signage, POS and interactive communication with customers



Tablets in public places

and in **rental** applications

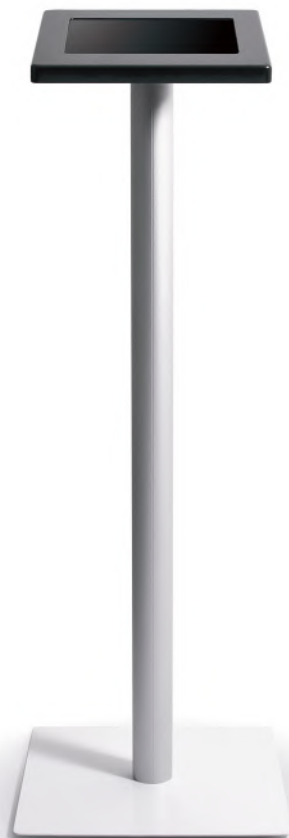

Tablets are more often used for digital signage, POS and interactive communication with customers.

Audipack offers standard and custom-made anti-theft tablet casings for all brands and versions. It is the perfect way to cover, finish and protect tablets in public places and retail outlets.

The Audipack solutions provide both a standard and customisable display that can be installed in various environments. Install it directly into the wall or have it free standing on the floor, for example in car showrooms or stores. The quality high-grade finishing gives this product a luxury appearance.

A modern design combined with practical elements; the tablet, including power cable, is completely concealed in the casing and Wi-Fi accessible.

It's great to have solutions.

- ▲ **Invisible locking system**
- ▲ **High level finishing**
- ▲ **Available with white floorplate and aluminium column**



TABLET HOUSINGS - PRO

Ref.	TC-IPad-Pro
Dimensions in mm	W 274,5 x D 22 x H 430
External access	Home button & camera
Suitable for	iPad 12.9"
Mounting interface	VESA 75 & 100 Audipack Ball joint mount (BJ-1)



Ref.	TC-IPad-Pro
Dimensions in mm	W 274,5 x D 22 x H 430
External access	Home button & camera
Suitable for	iPad 12.9"
Mounting interface	VESA 75 & 100 Audipack Ball joint mount (BJ-1)

**TABLET HOUSINGS - IPADHOUSING**

Ref.	IPADHOUSING i9.7
Dimensions in mm	W215 x H305 x D22
External access	Home button & camera
Suitable for	iPad Air 1 & 2, iPad 9.7", iPad Pro 9.7"
Mounting interface	Audipack Ball joint mount (BJ-1) with 641091 mounting plate



Ref.	IPADHOUSING iMINI
Dimensions in mm	W175 x H274 x D22 mm
External access	Home button & camera
Suitable for	iPad mini 1-4
Mounting interface	Audipack Ball joint mount (BJ-1) with 641091 mounting plate



ACCESSORIES

UNIVERSAL WALL MOUNT WITH ANGLE ADJUSTMENT



Ref.

Wall offset: 45 mm
Angle adjustment -15 / +15 degrees



BJ-1



641091



FLOOR STAND



Ref.

Colour: Floorplate is white,
Column is aluminium



FS-TC950



DESK MOUNT



Ref.

Colour: Tableplate is white,
Column is aluminium



DMV-0500



DM-TC100



TS-TC150



Video conference

solutions

Video conference solutions

Communication was never easier than with the Audipack videoconferencing solutions. Furniture, camera drawers, camera lift systems for every situation ideal solution



Audipack®

It's great to have solutions...

Let's

Communicate...

...with an Audipack video conference solution. Audipack video conferencing solutions are a great addition to your boardroom.

The video conference furniture

VCF-SL series: A slim and solid furniture available for 1 or 2 screens and 1 camera. Equipment is easy installed behind the removable rear panel, internal cables can be neatly organized.

Included:

Camera mount

Codec mount

Equipment mount



Optional:

Soundbar mounting brackets, (below screen installation)

19" codec mounting set

Passive Audipack sound bar (in cabinet installation)



The video conference floor stands

These versions are based on the standard 700 and 900 series floor stands (700 series page 16 and 900 series page 28).

Besides the fixed models, there are quick release models available that are ideal for rental purposes.

The video conference camera lift systems or drawers

Perfect solutions for installing and hiding cameras in furniture or a wall. With a push of a button the camera silently reveals itself.

- ▲ **Suitable for any brand flat panel, camera and codec**
- ▲ **Modern and timeless design**
- ▲ **Generous access by removable rear panel to all the equipment (VCF-SL)**
- ▲ **Custom solutions available on request**




Many practical accessories included (VCF-SL)



Very stylish designed (VCF-SL)



Very stylish designed (VCF-SL)



Generous access by removable rear panel

VIDEO CONFERENCE FURNITURE



Ref.	VCF-SL1
Dimensions in mm	W 970 x D 600 x H 1647
Suitable for	1 screen
Presentation height (centre screen)	Min. 1282 mm - Max. 1476 mm
Mounting interface	VESA 300 x 300, 400 x 200, 400 x 400, 600 x 200, 600 x 400 and L&S 5
Inside cabinet dimensions in mm	W 584 x D 200
Included	VCF-SL-CP , Camera mount VCF-SL-CM , Codec mount VCF-SL-UMP , Universal equipment mount
Optional	VCF-SL-SBB , Soundbar mounting brackets (below screen installation) VCF-SL-3U , 19 inch, 3U equipment mount



(larger screens possible)



Ref.	VCF-SL2-55
Dimensions in mm	W 2070 x D 600 x H 1647
Suitable for	2 screens (max. screen width 1270 mm)
Presentation height (centre screen)	Min. 1252 mm - Max. 1538 mm
Max. mounting range in mm	W x H 446
Inside cabinet dimensions in mm	W 584 x D 200



Ref.	VCF-SL2-65
Dimensions in mm	W 2310 x D 600 x H 1647
Suitable for	2 screens (max. screen width 1450 mm)
Presentation height (centre screen)	Min. 1252 mm - Max. 1538 mm
Max. mounting range in mm	W x H 446
Inside cabinet dimensions in mm	W 584 x D 200



Ref.	VCF-SL2-75
Dimensions in mm	W 2515 x D 600 x H 1647
Suitable for	2 screens (max. screen width 1700 mm)
Presentation height (centre screen)	Min. 1252 mm - Max. 1538 mm
Max. mounting range in mm	W x H 446
Inside cabinet dimensions in mm	W 584 x D 200



CAMERA LIFT



Ref.	P5110
Max. camera dimensions in mm	W 190 x D 250 x H 220
Stroke in mm	320
Camera shape	Round camera's
Connectivity	Contact relay Optional wall switch & IR/RF remote
Power supply	110-230 VAC 50-60 Hz/24 VDC
Custom models available on request	



CAMERA LIFT SYSTEMS



Power supply:
110-230 VAC 50-60 Hz/24 VDC

Ref.	P5414
Dimensions in mm	W 400 x D 200 x H 751-1426
Max. camera dimensions in mm	W 245 x D 180 x H 155
Stroke in mm	675
Connectivity	Contact relay
Ref.	P5466
Dimensions in mm	W 360 x D 245 x H 778-1453
Max. camera dimensions in mm	W 296 x D 180 x H 181
Stroke in mm	675
Connectivity	Contact relay
Optional wall switch & IR/RF remote	



VIDEO CONFERENCE SOLUTIONS

ACCESSORIES**INTERNAL SOUNDBAR SYSTEM**

Optional for video conference furniture VCF-SL1 & VCF-SL2



Ref.
Description
Max. power

LSS-SB20
mono internal soundbar
1 x 30 Watt RMS

LSS-SB40
stereo internal soundbar
2 x 20 Watt RMS

MOUNTING BRACKETS FOR FLAT PANELS

See "Mounting brackets for flat panels" for the full program see page 45



Mount any brand and type of flat panel on any Audipack system with the Audipack mounting brackets.



Universal mounts



Brand related mounts



VESA mounts

MOUNTING CAMS FOR DIRECT VESA MOUNTING

Ref.

392618
M6x13

392318
M8x13

390618
M10x13

FOR RECESSED MOUNTING HOLES

392621
M6x35



392620
M8x35

MOUNTING EQUIPMENT FOR VCF-SL1, VCF-SL2, VCF-SL2 -XL

VCF-SL-CM
Universal mounting set for a codec equipment



VCF-SL-3U
19 inch/3U mounting set



VCF-SL-UMP
Mounting plate for additional

CAMERA WALL MOUNT

Ref. **P6447**

CONNECTIVITY

Ref.
Description
Suitable for

260218
IR remote (external)
P5110, P5414, P5466

260219
RF remote (external)
P5110

Transport- and Flightcases

Audipack specialises in manufacturing transport and flight cases for all kinds of products.

For rental and staging, endurance sports, events or personal use. Large flat panel, LED walls and other audio visual equipment, sales representative demo sets or professional racing teams. Anything is possible.



Audipack®

It's great to have solutions...

Audipack - the No.1

flightcase manufacturer

All Audipack flight cases are custom made and are available as a one off or series production.

Special features such as motorised or hydraulic lift systems and shock absorbers can be integrated into cases, which can even be made water resistant if required. All cases can be finished in specific colours with special graphics or logos to reinforce a corporate image.

The interior of a transport or flight case is one of the most important factors for the safe transport of your product. The ease of inserting and removing the item from the case is essential to its ergonomics. Audipack is an expert in creating advanced interiors. Audipack interiors are used in our own cases but can also be used in other case shells.

For the AV market Audipack has a vast range of case designs for all brands of flat panel, projectors, mixers and other equipment.

Flight and transport cases can be designed to your precise requirements, and to match other Audipack accessories. Audipack is unique in offering several different types of custom-made flight and transport cases.



Flightcase for 105 inch curved screen



Front loader flightcase for floor stands 700 and 900 series



PACKER®



The Packer is the top of the range in small, ultra-light, custom made portable cases. The perfect solution for transportation, presentation and demonstration of fragile or valuable products.

Max. load 8 kg
Available as transport case
Panel thickness 4 mm



TOPLINE®



The TOPLINE is a light and stylish case and offers the strength and durability normally associated with a conventional transport- and flightcase.

Max. load 35 kg
Available as transport- and flightcase
Panel thickness 7 mm



SOLID FRAME SF7



The SF7 also known as the Solid frame 7 is comparable with the construction method of the Topline Flightcase only suited with metal corner parts and finishings.

Max. load 35 kg
Available as transport- and flightcase
Panel thickness 7 mm



HEAVY DUTY FLIGHTCASES



This range of flightcases is mainly used in AV rental and pro-audio applications. From LED video walls to high end video camera's; the Audipack heavy duty flightcases stand for their job.


Available as transport- and flightcase
Panel thickness 7-10-16-19 mm, depends on load




Type B	Type BK	Type E	Type K	Type KM
Hinged lid on top	Detachable lids on top, front and back	Detachable lid on top, low body	Detachable lids on front and back	Detachable lids on top, front and back
Type L	Type M	Type J	Type JM	Type T
Detachable lid on front with loading ramp	Detachable lid on top, high body	Detachable lid on front	Detachable lid on top and front	Detachable and dividable lid on top

Audipack flightcase colours, *samples are available on request*

Standard colours

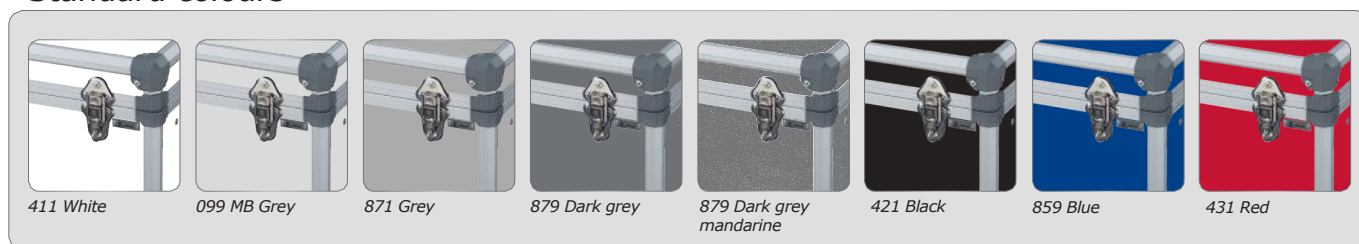

Colours against additional costs

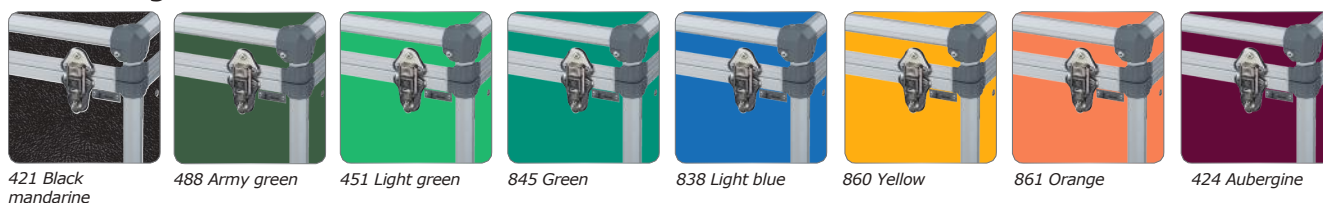

Smooth surface



Mandarine grain surface

The structure of the colour laminates is smooth.

Black and dark grey are available in smooth and mandarine grain versions.

There are several options for supporting corporate identities:

Screening

Audipack offers logo screening onto any size of case. The in-house silk screening process is incorporated into the manufacture of the case. A wide range of colour options, and 3-colour screening per image is available.



Engraving

An alternative way of displaying your company logo or safety symbols is engraving. With a CNC controlled production method, we can engrave directly onto the panels of the case. The advantage of this method is that the engraving is less prone to scratching. Engraving in a coloured finish is available.



Stickers

Audipack also offers custom vinyl stickers and digitally printed logos. Either supply us with the artwork or let us design it for you. From custom graphics to simple warning signs, we have the experience to design and apply with almost limitless design and colour options.



AV Furniture

Audipack has an in-house furniture department

*creating everything that offers added value for
boardrooms and interiors*



Audipack®

AV systems and more solutions...

Project line **AV furniture**



Audipack Project-Line furniture has been one of Audipack's specialisms for many years.

The Project-Line furniture range is individually designed, exclusively for you. Ideal whether you are looking for a single unique item or decorating the interior of an entire studio. Available as individual pieces or as a series.

Audipack specialises in high-quality commercial, studio and office furniture and can supply boardroom tables, commercial furniture, product displays, lecture stands and much more.

Design, functionality and durability are the main benefits. All furniture is manufactured to your individual taste and style and your requirements are our priority. We will incorporate any suggestions, shapes or designs to meet our customer's expectations.

Combine different facilities and standard or customised Audipack products to create a plug and play product such as furniture with built-in flat panel lift, video conferencing systems, or hideaways.



- ▲ **25 years of experience in furniture manufacturing**
- ▲ **Highly skilled timber craftsmen create custom design furniture of finest quality**
- ▲ **Installation on site can be performed to achieve maximum result.**



Silent series

interpreter booths

The highest ISO standards and requirements as requested by users have resulted in the Audipack "Silent Series" interpreter booths. The Silent Series consists of three versions: Silent 6300, Silent 9600 and 9700 series. All versions are fully transportable in optional flightcases.



Audipack®

It's great to have solutions.

The **Silent Series** are **easy and quick to install**



- ▲ **ISO 4043:2016 (latest version) approved**
- ▲ **Panoramic view windows**
- ▲ **Advanced cable management**
- ▲ **Quick installation**

For effective interpretation, silence is required.

The best solution is an Audipack interpreter booth.

In developing these booths, Audipack has paid full attention to a number of requirements e.g. flexibility, weight, good looks, high-quality materials, ease of use and durability. The scratch resistant surface combined with anodised aluminium frame, gives an attractive and professional appearance.

The Silent Series are easy and fast to install.

One person can do the job.

All elements and panels are interchangeable, so there is no difficulty in adapting the construction to local conditions. Even the door can be placed on any side. The roof elements are connected to each other in the same way as the wall, resulting in a safe and solid construction.

Silent 9600 and 9700 series interpreter booths comply with the ISO 4043:2016 standard. Silent 6300 complies with ISO 4043:1998.


For more information, ask for our Silent Series brochure.



9600 SILENT SERIES, ISO 4043:2016, INTERPRETER BOOTH



Silent series sound insulation capacity

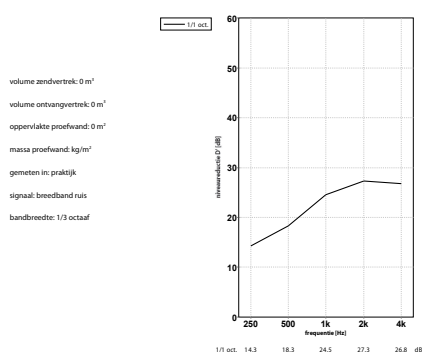

Ref.

External dimensions in mm
 Internal dimensions
 Weight incl. safety glass and table
 Colour exterior


Colour interior
 Sound insulation capacity
 Number of booth parts incl. table
 Table dimensions in mm
 Ventilation
 Lights
 Door

P4600


W 1682 x D 1682 x H 2041 excl. ventilation
 W 1600 x D 1600 x H 2000
 210 Kg
 Light grey (approx. RAL 7042)
 Other colours available on request
 Dark grey and white
 Better than ISO 4043:2016
 11
 1600 x 500
 Ventilation B2, detachable (height: 170 mm)
 LED light*
 Option to either place the door at the left, right or at the back side of the cabin



* Also available with ventilation B and without LED light: **P4601**

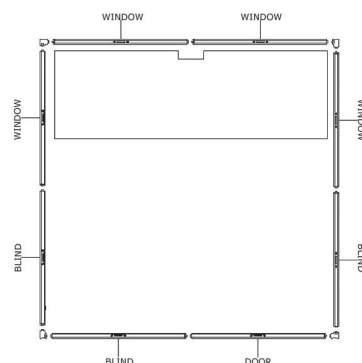

Cable passage



LED light



Table




Ventilation



9700 SILENT SERIES, ISO 4043:2016, COMPACT IN TRANSPORT



Silent series sound insulation capacity

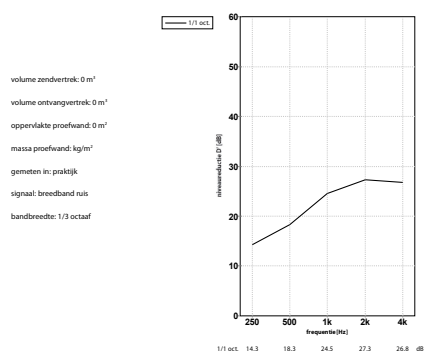


Ref.

External dimensions in mm
 Internal dimensions
 Weight incl. safety glass and table
 Colour exterior

Colour interior
 Sound insulation capacity
 Number of booth parts incl. table
 Table dimensions in mm
 Including floor
 Ventilation
 Lights
 Door

P4602

W 1682 x D 1682 x H 2041 excl. ventilation
 W 1600 x D 1600 x H 2000
 210 Kg
 Light grey (approx. RAL 7042)
 Other colours available on request
 Dark grey and white
 Better than ISO 4043:2016
 16
 1600 x 500
 no
 Ventilation B2, detachable (height: 170 mm)
 LED light*
 Option to either place the door at the left, right or at the back side of the cabin

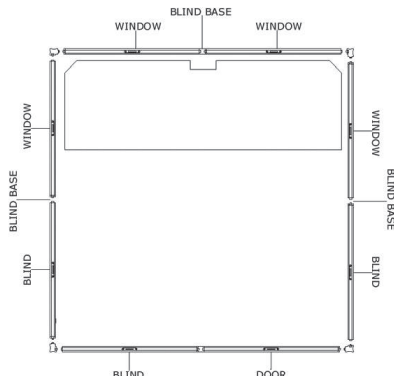

Cable passage



LED light



Table



Ventilation



6300 SILENT SERIES, ISO 4043:1998



Ref.

External dimensions in mm

Internal dimensions

Weight incl. safety glass and table

Colour

Sound insulation capacity

Number of booth parts incl. table and floor

Table dimensions in mm

Including floor

Ventilation

Optional

* DIN 56924 approved only when the optional double glass is mounted

P1483

W 1720 x D 1720 x H 2280

incl. ventilation and adjustable feet

W 1600 x D 1600 x H 2000

340 Kg

Light grey (approx. RAL 7042)

Other colours available on request

Better than ISO 4043:1998

According DIN 56924*

13

1600 x 500



yes

Included

Extension sets to 3 or 4 person booth




Silent series sound insulation capacity - ISO 4043:1998

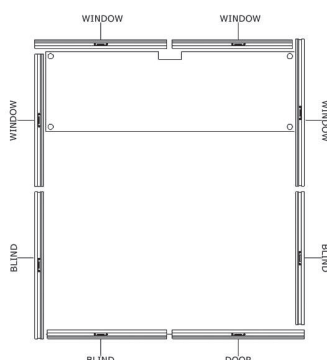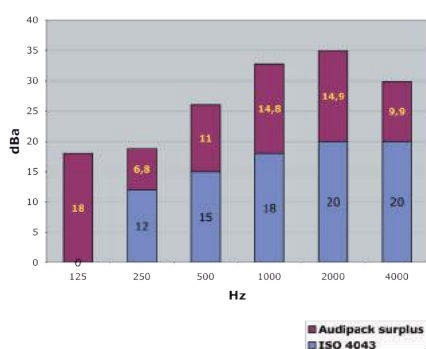

Adjustable feet



Ventilation A



Rear view



Cable passage



9300 SILENT SERIES, 1 PERSON BOOTH

Ref.

Type

External dimensions in mm

Weight incl. safety glass and table

P4019

1 person booth

W 814 x D 1682 x H 2041 excl. ventilation

150 Kg

ACCESSORIES

FLIGHTCASES

Transport your interpreter booth nice and safe in a Audipack flightcase.



Ref.

Suitable for Booth
Description

5604+5887

6300
Set of 2

15645

9600
Front loader

17495

9300 1 person (P4019)
Front loader

8969

9700
Front loader (standing model)

ASSEMBLY AID



Ref.

P1866

Specials and Projects

Audipack, designing your special projects

With almost 30 years of experience, Audipack can offer AV project management and project or product consultancy. Our specialist knowledge of product implementation can find you the best solution for any situation.

We will make products especially for you!

Our wide range of modern machinery and skills are at your disposal to create any type of bespoke product or solution.



Audipack®

It's great to have solutions...

AV special project solutions



We will make products especially for you!


Our use of in-house electronics and production methods ensure that products are well built and reliable.

Audipack primarily uses self-designed electronic PCB's to ensure a high level of product control, from simple single motor drives to complex multi-directional products with safety features. We build in a way that allows external engineers to implement connection and control without the need for PLC (programmable logic controller) programming knowledge.




The basic elements of any Audipack solution are:

- ▲ **Cost efficiency**
- ▲ **Product durability**
- ▲ **Top class components**
- ▲ **User ergonomics**
- ▲ **Preventing product complexity**
- ▲ **Product design**
- ▲ **Product quality**

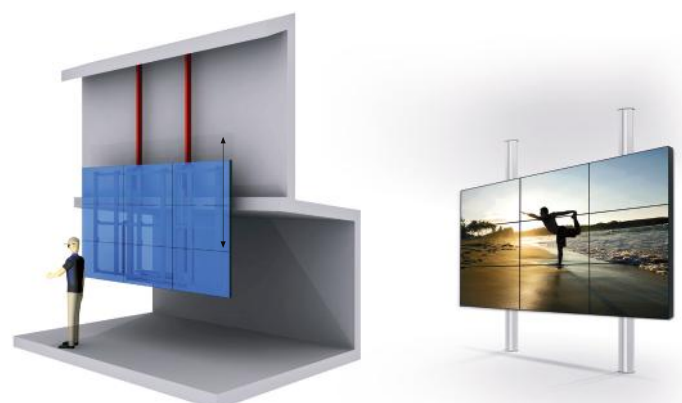

1.5 Km seamless projection set-up

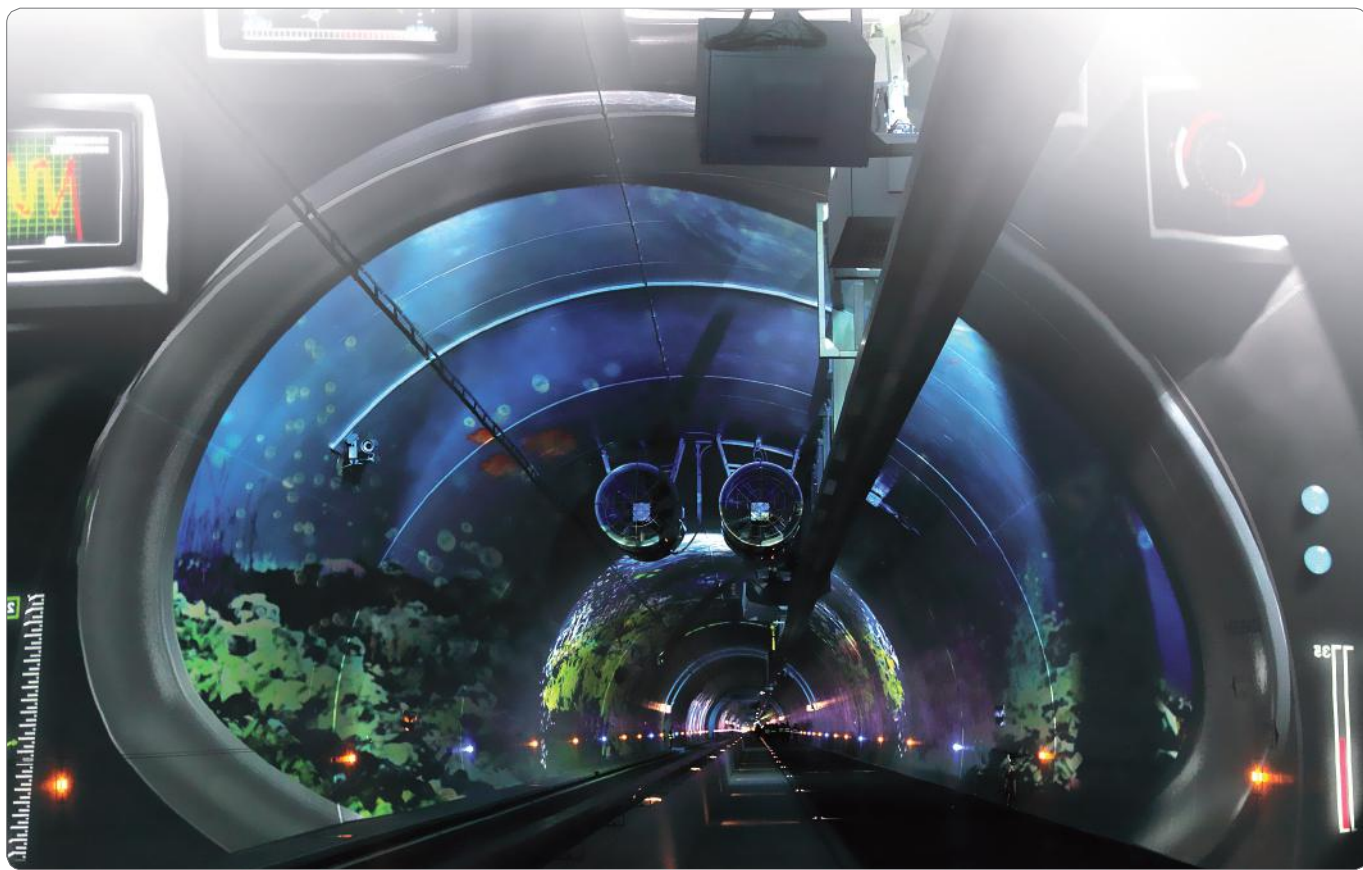

"An impressive project can only be made with impressive products"

For the city of Lyon, together with a French AV partner, Audipack has created a 1.5 Km seamless projection set-up with amongst 16K lumen projectors.

The specials designed outdoor housing not only protect the expensive and vulnerable projectors, but also protect them from external environmental influences. Together with special designed 3D adjustable ceiling mounts the housings are accurately installed for the best seamless result.

Not to forget the perfect service access for each projector. With an power drill activated drawer the projectors are pulled out under strict control; some projectors are installed under steep angles of more than 30 degrees in 2 or 3 axis.

Pedestrians, cyclists and public transportation travellers are being impressed with a fantastic engineered presentation with beautiful images and impressions.

Back-to-back indoor housings



The standard Audipack product program is always a very good base to start from to create a new one.

With little effort existing product- advantages and know-how can be used to modify the base to a complete new product. With a natural synergy between architects and engineers most sophisticated products are generated and fitted for every unique application.

In this case for museums a double screen solution with door entry keyboard and build-in fire department evacuation panel.




Tamina canyon projection



Audipack and distributor Lang Baranday have advised and manufactured, special outdoor projector casings. The casings were used to install projectors in the Tamina canyon.

The Canyon is created by the water of the Tamina river by splitting the rocks for over 15.000 years. The canyon is a popular place where people can enjoy the Tamina water, which has a temperature of 36.5 degrees Celsius. The water is also being used for wellness purposes. The installed projectors create a unforgettable scene in the rock formation by projecting specials designed images on the rock walls. The purpose of the audio-visual enhancement is attract more visitors and to inform and show the visitors the history and the uses of the Tamina canyon.


Gamma, the largest paint and DIY specialist of the Netherlands

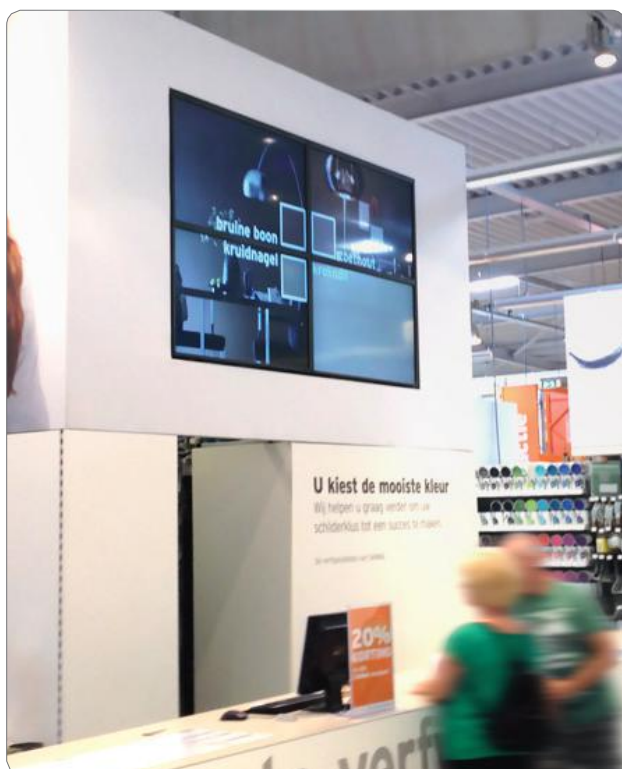

In collaboration with Audipack, Mood Media has transformed all Gamma retail shops into some of the most innovative specialists for paint advice and selection.

Gamma selected Mood Media for the implementation of, among other things, 2 x 2 video walls in all shops. These video walls are used to display commercial content, but also for true colour imaging of colours selected by clients.

For this, Audipack developed a quick to install system that can also easily bring two panels forward for easier access. The Audipack solution included cabinets for the entire video wall to turn the complete system into an easy to install plug-and-play solution.



Brand related

Samsung OMN solutions

Audipack Brand related solutions

Audipack has designed several solutions for the installation of the Samsung OMN double-sided screens. The screens can be easily installed and the cables can be hidden from sight. Due to the slim design, all the attention will be drawn to the screen



SAMSUNG OMN-D FLOORSTAND

Ref.	P7515
Suitable for	OMN-D46
Colour	RAL 9005 or RAL 9016
Profile dimension in mm	W40 x D70 mm
Distance middle screen to floor	1700 mm (easy to modify).

Ref.	P7517
Suitable for	OMN-D46
Colour	RAL 9005 or RAL 9016
Profile dimension in mm	W40 x D70 mm
Distance middle screen to floor	1700 mm (easy to modify).

SAMSUNG OMN-D CEILING

Ref.	P7514
Suitable for	OMN-D46
Colour	RAL 9005 or RAL 9016
Column size in mm	W40 x D70
Distance bottom screen to constructional ceiling	2000 mm (easy to modify).

Ref.	P7516
Suitable for	OMN-D55
Colour	RAL 9005 or RAL 9016
Column size in mm	W40 x D70
Distance bottom screen to constructional ceiling	2000 mm (easy to modify).

SAMSUNG OMN-D CEILING TO FLOOR

Ref.	P7508
Suitable for	OMN-D46
Colour	RAL 9005 or RAL 9016
Column size in mm	W40 x D70
Total column length	min - max 2700mm

Ref.	P7507
Suitable for	OMN-D55
Colour	RAL 9005 or RAL 9016
Column size in mm	W40 x D70
Total column length	min - max 2700mm