

Fold down ceiling lift systems

for flat panels

Ever thought of hiding your flat panel when not in use?

Audipack offers a neat solution



Audipack®

It's great to have solutions...

Flat panel *fold down* lift systems

A different thought about concealing your TV in the room...

When installing TV's on the wall, or popping out of a furniture is not an option or simply not possible, than the Audipack fold down lift systems are the best solution.

With this unique system the TV folds down from the ceiling with just a push on a button. The TV is mounted to the ceiling, but cause of the 100 degrees opening angle the TV aims perfectly to the viewing position.

The fold down lift systems are available in surface mounted and in-ceiling mounted units.

The **surface mounted** versions are very thin lift systems that can be installed in any room, from bed rooms to small offices.

The lightweight lift enables an easy and quick installation for any installer.

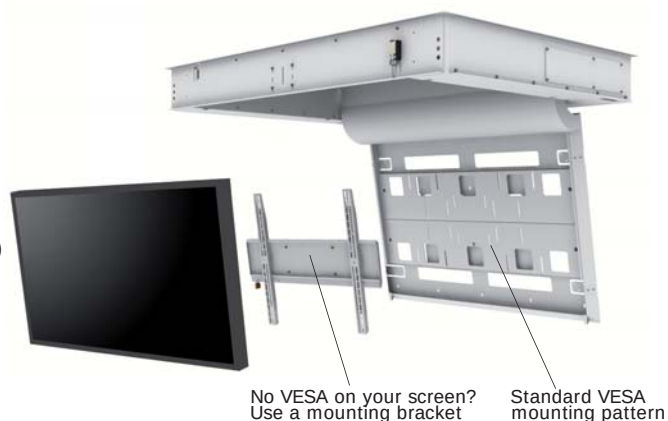
The **in-ceiling mounted** versions are available up to almost any screen size and applicable also in off-shore environments; also outdoor (!). Even better: with these models is an optional automatic lowering panel available that closes the ceiling above the TV; as if the TV has always been there....

Surface mounted model

In-ceiling mounted model with optional available ceiling closing unit




- ▲ **Ultra thin installation height (surface mounted version)**
- ▲ **Perfect viewing angle**
- ▲ **Neatly finished, no mechanics visible**
- ▲ **Marine and outdoor models available**



Minimalistic design and neatly finished



Optional ceiling closing unit



Neatly finished



Outdoor models, a water repellent rubber seal closes the lift up to IP 56.

SURFACE MOUNTED FOLD DOWN LIFT SYSTEMS

Standard VESA 100x200, 200x200, 200x400
and 400x400, no additional bracket required




"Registered design, patent pending"

Power supply: **100-240VAC/5A 50-60 Hz**

Ref.**FFCL-3032S**


Dimensions in mm
Max. flat panel in mm
Connectivity

Approx. W 1200 x D 750 x H 100
W 980 x D 50 x H 595
Contact relay, RS-232
Optional wall switch & IR/RF remote

**Ref.****FFCL-4046S**

Dimensions in mm
Max. flat panel in mm
Connectivity

Approx. W 1400 x D 1000 x H 100
W 1120 x D 50 x H 675
Contact relay, RS-232
Optional wall switch & IR/RF remote

**FOLD DOWN LIFT SYSTEMS (IN-CEILING)**

Standard VESA 200 x 200, 400 x 200,
600 x 200 and 800 x 400



Connectivity:
Contact relay, wall switch, IR/RF remote

Power supply: **230 VAC 50-60 Hz / 24 VDC**

Ref.**FFCL-3032**


Dimensions in mm
Max. flat panel in mm

W 1416 x D 963 x H 165
W 980 x D 140 x H 595

**Ref.****FFCL-4042**

Dimensions in mm
Max. flat panel in mm

W 1496 x D 1058 x H 165
W 1060 x D 140 x H 690

**Ref.****FFCL-4650**

Dimensions in mm
Max. flat panel in mm

W 1586 x D 1128 x H 165
W 1150 x D 140 x H 760

**Ref.****FFCL-5255**


Dimensions in mm
Max. flat panel in mm

W 1776 x D 1258 x H 200
W 1340 x D 175 x H 840

**Ref.****FFCL-6065 (with safety clamp)**

Dimensions in mm
Max. flat panel in mm

W 1972 x D 1520 x H 286
W 1620 x D 155 x H 1045

**STAINLESS STEEL FOLD DOWN LIFT SYSTEMS (WITH SAFETY CLAMP)**

Standard VESA 200 x 200, 400 x 200,
600 x 200 and 800 x 400



Connectivity:
Contact relay, wall switch, IR/RF remote

Power supply: **230 VAC 50-60 Hz / 24 VDC**

Ref.**FFCL-3032-OD**


Dimensions in mm
Max. flat panel in mm

W 1416 x D 1148 x H 165
W 980 x D 140 x H 595

**Ref.****FFCL-4042-OD**

Dimensions in mm
Max. flat panel in mm

W 1496 x D 1243 x H 165
W 1060 x D 140 x H 690

**Ref.****FFCL-4650-OD**

Dimensions in mm
Max. flat panel in mm

W 1586 x D 1313 x H 165
W 1150 x D 140 x H 760

**Ref.****FFCL-5255-OD**


Dimensions in mm
Max. flat panel in mm

W 1776 x D 1443 x H 200
W 1340 x D 175 x H 840

**Ref.****FFCL-6065-OD**

Dimensions in mm
Max. flat panel in mm

W 1972 x D 1705 x H 286
W 1620 x D 155 x H 1045



FOLD DOWN CEILING LIFT SYSTEMS

FOLD DOWN LIFT SYSTEMS WITH ROTATION



Power supply: 230 VAC 50-60 Hz/24 VDC

Ref.**FFCL-6065-R**

Dimensions in mm

W 1900 x D 1616 x H 316

Max. flat panel in mm

W 1542 x D 156 x H 898

Standard VESA 200 x 200, 400 x 200,
600 x 200 and 800 x 400**Ref.****FFCL-5255-OD-R**

Dimensions in mm

W 1842 x D 1629 x H 316

Max. flat panel in mm

W 1440 x D 122 x H 850

Standard VESA 200 x 200, 400 x 200,
600 x 200 and 800 x 400

Fold down ceiling lift systems

ACCESSORIES

MOUNTING BRACKETS FOR FLAT PANELS, NOT SUITABLE FOR SURFACE MOUNTED MODELS

**Ref.**Type of material
Max. mounting range in mm
Min. mounting range in mm**P2825**mild steel
W 470 x H 360
W 125**P2826**mild steel
W 670 x H 446
W 125**P3560**mild steel
W 810 x H 671
W 120**P3399**stainless steel
W 470 x H 360
W 125**P3304**stainless steel
W 670 x H 446
W 125**P3595**stainless steel
W 810 x H 671
W 120

WALL SWITCH



Ref.

261318

REMOTE CONTROL



Ref.

260214 (IR)

260215 (RF)

ELECTRIC CEILING CLOSING UNIT



The electric ceiling closing unit is an optional unit that closes the ceiling above the flat panel in opened position. This advantages in a continued ceiling structure above the screen and makes the lift almost invisible. Please refer to the price list for a model listing.



Ref.

FFCL-CF