



Konnect flex 45 click & CablePort standard²

Modern integration of connection systems in media furniture

Konnect flex 45 click & CablePort standard²

Modern integration of connection systems in media furniture



Konnect flex 45 click

User-friendly click system

Further compatible products for the Konnect flex 45 click system

CablePort flex

The high-value model for individual desktops



CablePort desk + module holder

The flexible solution for varying locations



Easy mounting & perfect integration!



CablePort standard²
available in stainless steel or powder-coated steel (RAL 9006)

CablePort frame
For flexible and low-cost installation



CablePort manager / team
Spacious interface management



Konnect flex 45 click

Easy click mounting on the front of the module holder

- Easy and quick installation possible without requiring any tools
- Multiple connectivity
- Improved design. Interface for level integration, no screws are visible.
- Frontwise dismounting of the adapter plates (only CablePort standard²)
- Available versions: cable+plug connection, soldering connection and gender changer connection
- Also suitable for cable channels 45 with mind. 60 mm installation depth



Konnect flex 45 click - Miscellaneous

Illustration	Model	Connection, rear side	Ref. No.
	Faceplate		7464 000 400
	Faceplate (full size)		7464 000 500
	Push-button, stainless steel, 48 VDC/125 mA	screw connection	7464 000 441
	Push-button, stainless steel, 30 VDC/500 mA	Euro plug	7464 000 442
	Push-button, stainless steel with blue LED light ring, 48 VDC/500 mA light ring 9 - 12 VDC, (1 x open/close)	Euro plug	7464 000 443
	NEU Push-button, stainless steel with blue LED light ring, 48 VDC/500 mA light ring 5 VDC, (1 x open/close)	cable+plug, 3 m with open ends	7464 000 448
	Faceplate with cable outlet with metal reinforcement on the rear	opening: 8 mm	7464 000 446
		opening: 12 mm	7464 000 447
	Double switch e. g. for controlling screens etc. via low voltage relais		7449 000 448
	EnOcean radio button with 1-fold / 2-fold switch		7464 000 449
	Media control Neets Echo Media control Neets SieRRa needs the space of 4 half plates		7464 000 591 7464 000 590



- socket/socket, 30 cm



- 13/19-pin, round cable



- socket/plug, 100 - 300 cm

The adapter plates are available
in 4 versions

Konnect flex 45 click - Digital

Illustration	Model	Connection, rear side	Ref. No.
	HDMI - high speed with Ethernet	cable+plug: short - socket cable+plug: 1 m - plug cable+plug: 3 m - plug	7464 000 542 7464 000 842 7464 000 942
	DVI-I (24 + 5-pin)	cable+plug: short - socket cable+plug: 3 m - plug	7464 000 502 7464 000 902
	DVI-D to HDMI	cable+plug: short - socket	7464 000 580
	DisplayPort	cable+plug: short - socket cable+plug: 1 m - plug cable+plug: 3 m - plug	7464 000 588 7464 000 888 7464 000 988

Konnect flex 45 click - Digital to 19-pin system cable

Illustration	Model	Connection, rear side	Ref. No.
	HDMI to 19-pin DIN plug	cable+plug: short - socket cable+plug: 3 m - plug	7464 000 561 7464 000 961
	DVI to 19-pin DIN plug	cable+plug: short - socket cable+plug: 3 m - plug	7464 000 560 7464 000 960


Konnect flex 45 click - Analogue to 13-Pin system cable

Illustration	Model	Connection, rear side	Ref. No.
	VGA (HD15 fully configured) to 13-pin DIN plug	cable+plug: short - socket cable+plug: 3 m - plug	7464 000 552 7464 000 952
	VGA (HD15), video (cinch), audio (3.5 mm jack) to 13-pin DIN plug	cable+plug: short - socket cable+plug: 3 m - plug	7464 000 551 7464 000 951


Konnect flex 45 click - VGA/Video

Illustration	Model	Connection, rear side	Ref. No.
	VGA (HD15)	gender changer cable+plug: short - socket cable+plug: 1 m - plug cable+plug: 3 m - plug	7464 000 601 7464 000 501 7464 000 801 7464 000 901
	VGA active (full size plate) with integrated VGA amplifier 1:1 400 MHz with external power supply	cable+plug: short - socket	7464 000 509
	VGA/audio/push-button (full size plate) with illuminated stainless steel button, perfect solution for switch with StepIn technology, e.g. VGA audio Share Pro 8 to 1 (5816000001), (requires fully configured VGA cable, e.g. 74830002xx) to transmit the change-over command	cable+plug: short - socket	7464 000 585
	Video (cinch) Required installation depth for cable+plug: 47 mm	cable+plug: short - socket cable+plug: 3 m - plug	7464 000 503 7464 000 903

Konnect flex click - Audio

Illustration	Model	Connection, rear side	Ref. No.
	Audio L/R (cinch) Required installation depth for cable+plug: 47 mm	cable+plug: short - socket cable+plug: 3 m - plug	7464 000 510 7464 000 910
	Audio jack (3.5 mm stereo) Required installation depth for cable+plug: 47 mm	cable+plug: short - socket cable+plug: 1 m - plug cable+plug: 3 m - plug	7464 000 511 7464 000 811 7464 000 911
	XLR socket, 3-pin (full size plate) Neutrik socket	soldering	7464 000 412
	Volume control (Poti, passive), (cinch L/R) (full size plate) for line signals, e.g. of notebooks, DVD players Required installation depth for cable+plug: 35 mm	cable+plug: short - socket	7464 000 518

Konnect flex click - Data / Network

Illustration	Model	Connection, rear side	Ref. No.
	Serial RS232 (9-pin SubD)	cable+plug: short - socket	7464 000 520
	USB 2.0 A-socket/A-socket Required installation depth for cable+plug: 43 mm	cable+plug: short - socket cable+plug: 3 m - plug	7464 000 522 7464 000 922
	USB 2.0 B-socket/A-socket Required installation depth for cable+plug: 43 mm	cable+plug: short - socket cable+plug: 3 m - plug	7464 000 525 7464 000 925
	USB active Hub B-socket/A-socket with integrated repeater for max. 5 m cable length Required installation depth for cable+plug: 43 mm	cable+plug: short - socket	7464 000 528
	USB 2.0 B-socket/B-socket Required installation depth for cable+plug: 43 mm	cable+plug: 1 m - plug	7464 000 829
	Cat-5 (RJ45)	gender changer (1:1)	7464 000 523
	Cat-6 (RJ45) Required installation depth for cable+plug: 47 mm	cut+clamp gender changer (1:1) cable+plug: short - socket cable+plug: 3 m - plug	7464 000 423 7464 000 526 7464 000 527 7464 000 927
	Cat-7 (socket of Nexans) Certified up to 1000 MHz, downward compatible to RJ45 (Cat-5/Cat-6)	cut+clamp	7464 000 424
	Cat-6/audio jack (3.5 mm stereo) Required installation depth for cable+plug: 47 mm	cable+plug: short - socket	7464 000 587



CablePort standard²

The new Kindermann CablePort standard² is the result of our consistent and ambitious further development of the popular CablePort standard.


The CablePort standard² can be mounted faster and more easily from above through the cutout of the desktop, even into furniture whose rearside is not accessible.

Click mounting along with a small installation depth of only 70 mm provides a maximum legroom and a high seating comfort. For easy mounting and wiring the CablePort standard² features a practical service position.

- Quick mounting due to click mechanism
- Individual configuration with the new adapter plates of the Konnectflex 45 series
- Homogeneous appearance due to level-mounted interfaces
- Integration of Neets media control, USB charger, EnOcean button
- Easier mounting into desktops from above
- Level-mounted desktop integration possible
- 3 versions: 2-fold, 4-fold, 6-fold
- Frame radius R5, installation depth 70 mm
- For desktops from 12 up to 48 mm thickness
- Mains connection with 3-pin GST 18i plug (max. 16 A)



with acrylic glass lid
(included in package from Q2/2015 on)

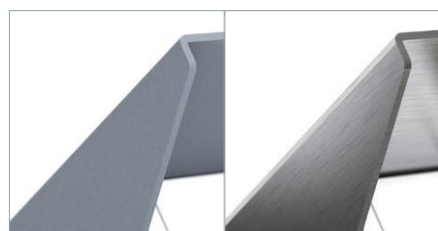

2 different surfaces

- Powder-coated steel silver / RAL 9006
- Stainless steel



Casing

- Can be individually fitted
- Completely pre-mounted



Closed

- Level-mounted desktop integration possible

CablePort standard²

completely pre-configured

CablePort standard² 2-fold version



CablePort standard² / 2-fold version

Outer dimensions	160 x 190 mm
Cutout	137 x 170 mm
Pre-mounted with	1 x mains 1 x VGA 1 x HDMI 1 x audio jack (3.5 mm stereo) 1 x Cat-6 (RJ45) all with cable+plug

Powder-coated steel RAL 9006

Ref. No. 7492000002

CablePort standard² 4-fold version



CablePort standard² / 4-fold version

Outer dimensions	250 x 190 mm
Cutout	227 x 170 mm
Pre-mounted with	2 x mains 1 x VGA 1 x HDMI 1 x audio jack (3.5 mm stereo) 1 x Cat-6 all with cable+plug

Powder-coated steel RAL 9006

Ref. No. 7492000004

Stainless steel

Ref. No. 7492000014

CablePort standard² 6-fold version



CablePort standard² / 6-fold version

Outer dimensions	340 x 190 mm
Cutout	317 x 170 mm
Pre-mounted with	3 x mains 1 x VGA 1 x HDMI 1 x audio jack (3.5 mm stereo) 3 x Cat-6 (RJ45) all with cable+plug

Powder-coated steel RAL 9006

Ref. No. 7492000006

Stainless steel

Ref. No. 7492000016

CablePort standard²

with USB charger – for individual configuration

CablePort standard² 4-fold version



USB charger: 2 x USB, A-socket, integrated power supply, max. capacity 1500 mA

CablePort standard ² / 4-fold version		
Outer dimensions	250x190 mm	
Cutout	227 x 170 mm	
Pre-mounted with	1 x mains 1 x USB charger 2 x empty modules	2 x mains 1 x USB charger 1 x empty module
Powder-coated steel RAL 9006		
Ref. No.	7492 000 171	7492 000 172
Stainless steel		
Ref. No.	7492 000 151	7492 000 152

CablePort standard² 6-fold version




USB charger: 2 x USB, A-socket, integrated power supply, max. capacity 1500 mA

CablePort standard ² / 6-fold version			
Outer dimensions	340x190 mm		
Cutout	317 x 170 mm		
Pre-mounted with	1 x mains 1 x USB charger 4 x empty modules	2 x mains 1 x USB charger 3 x empty modules	3 x mains 1 x USB charger 2 x empty modules
Powder-coated steel RAL 9006			
Ref. No.	7492 000 181	7492 000 182	7492 000 183
Stainless steel			
Ref. No.	7492 000 161	7492 000 162	7492 000 163

Power supply and connections for CablePort standard², flex, basic

Illustration	Model	Specification	Ref. No.
	Connection cable Schuko plug to GST 18 socket	1 m	7444 000 301
		2 m	7444 000 302
		3 m	7444 000 303
		5 m	7444 000 305
		8 m	7444 000 308
	GST 18 extension socket/plug	1 m	7444 000 321
		2 m	7444 000 322
		3 m	7444 000 323
	GST 18 distributor with clamp	1 input (plug), 3 outputs (socket)	7444 000 340
	Schuko connection to GST 18 plug	0.5 m	7444 000 341

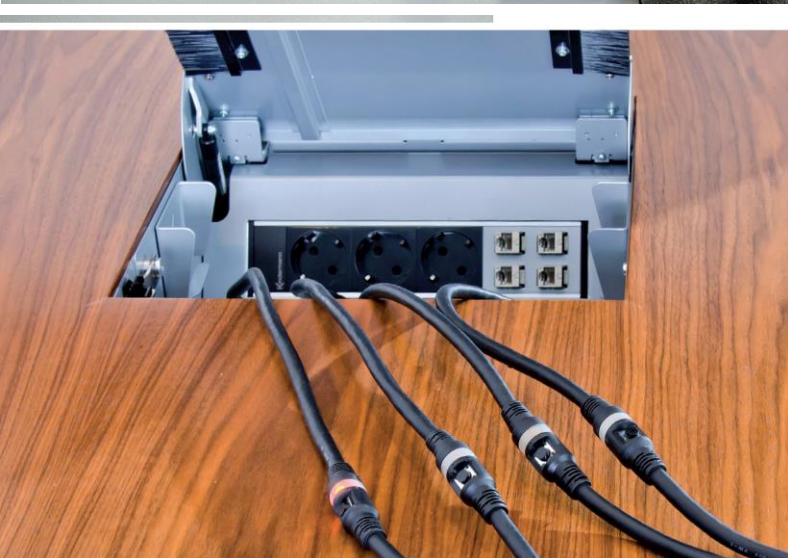

DISTRIBUIDOR EM PORTUGAL



R. Sá de Figueiredo 6 - C
2790-233 Carnaxide
Telef. (+351) 21 417 76 21 ♦ Fax. (+351) 21 030 00 31
Web: www.sislite.pt - email: geral.sislite@sislite.pt