



Konnect

MultiMedia connection systems

Modular and versatile

The modular MultiMedia connection system can easily integrate computer, video, audio, control or network connections in socket systems, desktop casings, floor boxes and 19" rack patch panels.

It puts an end to ugly cables lying or hanging around!
Choose from the biggest product range on the market.

Ready for the future

- The modular system can be expanded any time by adding more adapter plates.

Konnect family

The high-quality adapter plates are available for various applications and in different designs and materials.



Konnect 50 alu / 50 steel
see page 82 - 88



Konnect 54 alu
see page 82 - 88




Konnect design
see page 89 - 93



Konnect flex 45
see page 94 - 97

Applications	Suitable for the following applications			
Socket systems 	✓	✓	✓	
CablePort basic/standard 	✓			
CablePort module holders 				✓
Floor box kits 	✓			
19" rack patch panels 	✓			

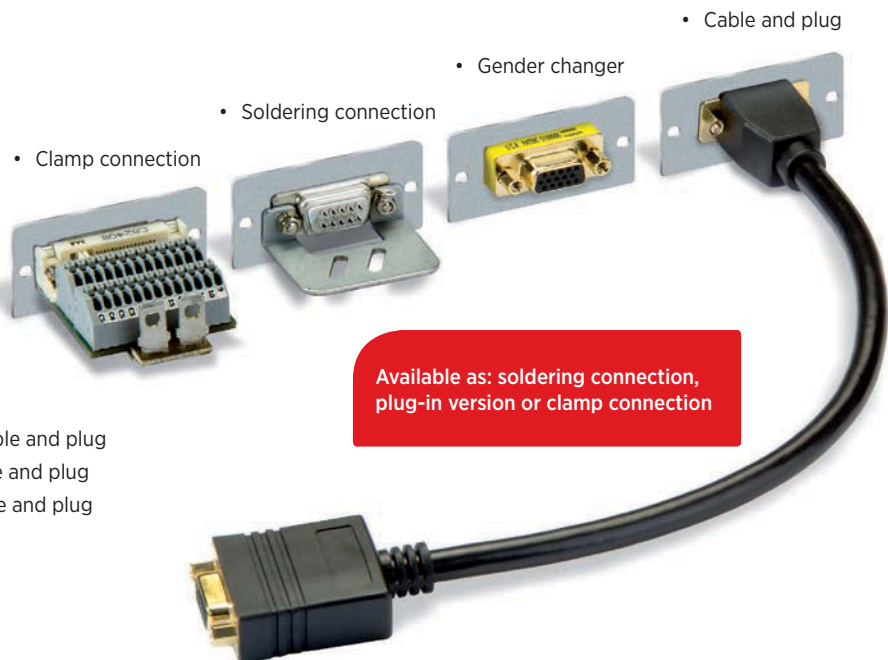

Cable and plug

- Most adapter plates with cable and plug are available in 3 different sizes:
- socket (f) / socket (f) with ca. 20 cm cable and plug
- socket (f) / socket (m) with ca. 1 m cable and plug
- socket (f) / socket (mf) with ca. 3 m cable and plug

Available as: soldering connection, plug-in version or clamp connection

Also available for Legrand MOSAIC and Feller Edizio, BTicino, UK systems on demand.

Please ask for details.

Compatible with socket systems from well-known European manufacturers!




For details please see www.kindermann.de/konnect



Module configurator

under www.kindermann.com/medien/modulkonfigurator/
our module configurator helps you to work out your individual solution.

Installation example
of a socket cover
with on-wall casing

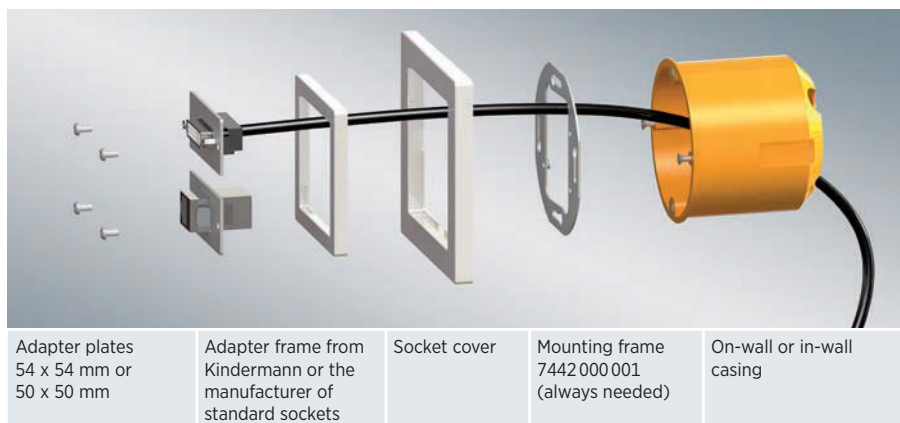

Konnect alu / steel - Miscellaneous

Adapter plates sized			50 x 50 mm	50 x 50 mm	54 x 54 mm
Illustration	Model	Connection	Aluminium	Stainless steel	Aluminium
	Faceplate (half size)		7444 000 400	7451 000 400	7441 000 400
	Faceplate (full size)		7444 000 500	7451 000 500	7441 000 500
	Faceplate (full size) XLR with cut-out for Neutrik D-series		7444 412 020	7451 412 020	7441 412 020
	Mains switch (full size plate) only available pre-mounted in CablePort standard		7444 000 200	7451 000 200	
	Faceplate with cable outlet for CablePort standard only		7444 000 446		
	Faceplate with cable outlet for cables up to 12 and 9 mm diameter		7444 000 444	7451 000 444	
	Push-button, stainless steel, 48 VDC/125 mA; 1,2 W, e. g. for control of selectors (e. g. 5816 000 007) with contact inputs	Soldering	7444 000 441	7451 000 441	
	Adapter plate with Button, stainless steel 30 VDC/500 mA	Soldering 4.8 x 0.8, 2-pin	7444 000 442	7451 000 442	
	Taster, stainless steel with blue LED light ring, max. 48 VDC/500 mA light ring 9-12 VDC 1 x open/close	Soldering 2.8 x 0.5	7444 000 443	7451 000 443	
	Button panel, 8-fold with blue LEDs; < 48 VDC, max. 50 mA DC, light 12-24 V; e. g. for switcher with contact inputs etc.	Screw+clamp	7444 000 445		

Konnect alu / steel - HDMI

Adapter plates sized			50 x 50 mm	50 x 50 mm	54 x 54 mm
Illustration	Model	Connection	Aluminium	Stainless steel	Aluminium
	HDMI - Highspeed with Ethernet Required installation depth: for cable+plug connection: 52 mm for clamp connection: 42 mm	Cable+plug Cable+plug 1 m Clamp	7444 000 542 7444 000 842 7444 000 740	7451 000 542	7441 000 542 7441 000 740
	HDMI - Highspeed with Ethernet 90° version Required installation depth: 25 mm	Cable+plug	7444 000 582		7441 000 582
	HDMI to DVI Required installation depth: 52 mm	Cable+plug	7444 000 581		7441 000 581
	DVI-I (24 + 5-pin) Required installation depth for cable+plug connection: 65 mm	Soldering Cable+plug	7444 000 402 7444 000 502	7451 000 502	7441 000 402 7441 000 502
	DVI-D to HDMI Required installation depth: 52 mm	Cable+plug	7444 000 580		7441 000 580
	DisplayPort	Cable+plug	7444 000 588		7441 000 588
	DisplayPort - 90° version Required installation depth: 30 mm	Gender changer	7444 000 583		7441 000 583
	HDMI to 19-pin plug Required installation depth: 67 mm	Cable+plug	7444 000 561		7441 000 561
	HDMI 90° to 19-pin plug Required installation depth: 30 mm	Cable+plug	7444 000 562		7441 000 562
	DVI-D to 19-pin plug Required installation depth: 67 mm	Cable+plug	7444 000 560		7441 000 560

Konnect alu / steel - VGA

Adapter plates sized			50 x 50 mm	50 x 50 mm	54 x 54 mm
Illustration	Model	Connection	Aluminium	Stainless steel	Aluminium
	VGA (HD15) Required installation depth for cable+plug connection: 47 mm for clamp connection: 42 mm	Soldering Cable+plug Cable+plug 1 m Gender Changer Clamp	7444 000 401 7444 000 501 7444 000 801 7444 000 601 7444 000 701	7451 000 401 7451 000 501 7451 000 601	7441 000 401 7441 000 501 7441 000 600 7441 000 701
	VGA (HD15) 90° version Required installation depth: 32 mm	Gender Changer	7444 000 584		7441 000 584
	VGA to BNC 5 Required installation depth: 47 mm	Cable+plug	7444 000 507	7451 000 507	7441 000 507
	VGA active (full size plate) with integrated VGA amplifier 1:1; 400 MHz and with external power supply 230 V/12 VDC Required installation depth: 40 mm	Cable+plug	7444 000 509	7451 000 509	7441 000 509
	VGA/audio (full size plate) Adapter plate with illuminated stainless steel button to switch from VGA audio Share Pro 8 to 1 remote (5816 000 001) - requires fully confi- gured VGA cables (7483 000 2xx) to transmit the change-over command	Cable+plug	7444 000 585		
	VGA (HD15) to 13-pin plug (fully configured) Required installation depth: 67 mm	Cable+plug	7444 000 552		7441 000 552
	VGA (HD15) 90° version to 13-pin plug (fully configured) Required installation depth: 40 mm	Cable+plug	7444 000 554		7441 000 554
	VGA (HD15) with DDC support, audio (3.5 mm jack) to 13-pin plug Required installation depth: 54 mm	Cable+plug	7444 000 556		7441 000 556
	VGA (HD15), video (cinch), audio (3.5 mm jack) to 13-pin plug Required installation depth: 54 mm	Cable+plug	7444 000 551		7441 000 551
	VGA (HD15), s-video (4-pin MiniDIN), video (cinch) to 13-pin plug Required installation depth: 54 mm	Cable+plug	7444 000 550		7441 000 550
	VGA (HD15), s-video (4-pin MiniDIN), video (cinch), 90° version to 13-pin plug Required installation depth: 40 mm	Cable+plug	7444 000 555		7441 000 555
	VGA (HD15), video (cinch), 3 x wire e. g. for RS 232 control or IR transmission of PIXIE incl. 3-pin clamp Required installation depth: 54 mm	Cable+plug	7444 000 553		7441 000 553

Konnnect alu / steel - Video

Adapter plates sized			50 x 50 mm	50 x 50 mm	54 x 54 mm
Illustration	Model	Connection	Aluminium	Stainless steel	Aluminium
	Video (cinch) Required installation depth for cable+plug connection: 47 mm	Soldering Cable+plug	7444 000 403 7444 000 503	7451 000 403 7451 000 503	7441 000 403 7441 000 503
	Video to 1 x BNC Required installation depth: 47 mm	Cable+plug	7444 000 535		7441 000 535
	S-video (4-pin MiniDIN) Required installation depth for cable+plug connection: 47 mm	Soldering Cable+plug	7444 000 404 7444 000 504	7451 000 504	7441 000 404 7441 000 504
	S-video to 2 x BNC Required installation depth: 47 mm	Cable+plug	7444 000 536		7441 000 536
	Video/s-video (cinch/4-pin MiniDIN) Required installation depth for cable+plug connection: 47 mm	Soldering Cable+plug	7444 000 405 7444 000 505	7451 000 505	7441 000 405 7441 000 505
	Component video (3 x cinch) Required installation depth for cable+plug connection: 47 mm	Soldering Cable+plug	7444 000 406 7444 000 506	7451 000 506	7441 000 406 7441 000 506
	Scart	Soldering			7441 000 408
	BNC - 1-fold	Gender changer	7444 000 537		7441 000 537
	BNC - 2-fold	Gender changer	7444 000 538		7441 000 538
	BNC - 5-fold (full size plate)	Gender changer	7444 000 539		7441 000 539
	F socket - 2-fold for HF signals (e. g. for satellite receiver)	Cable connection	7444 000 541		7441 000 541

Konnect alu / steel - Audio


Adapter plates sized			50 x 50 mm	50 x 50 mm	54 x 54 mm
Illustration	Model	Connection	Aluminium	Stainless steel	Aluminium
	Audio L/R (cinch) Required installation depth for cable+plug connection: 47 mm	Soldering Cable+plug	7444 000 410 7444 000 510	7451 000 410 7451 000 510	7441 000 410 7441 000 510
	Audio jack (3.5 mm stereo) Required installation depth for cable+plug connection: 47 mm	Soldering Cable+plug Cable+plug 1 m	7444 000 411 7444 000 511 7444 000 811	7451 000 411 7451 000 511	7441 000 411 7441 000 511
	Audio jack (6.3 mm stereo) with switch contact	Soldering	7444 000 417		7441 000 417
	XLR 3-pin (full size plate) Neutrik® socket (f)	Soldering (XLR-socket - f) Soldering (XLR-plug - m)	7444 000 412 7444 000 416	7451 000 412 7451 000 416	7441 000 412 7441 000 416
	XLR 3-pin plug (m) - 2-fold (full size plate) XLR 3-pin socket (f) - 2-fold (full size plate)	Clamp Clamp	7444 000 578 7444 000 579		7441 000 578 7441 000 579
	Speakon 4-pin (full size plate) Neutrik® socket (f) Required installation depth: 40 mm (with soldering) Nennstrom 40A	Soldering	7444 000 413	7451 000 413	7441 000 413
	Loudspeaker Suitable for loudspeaker cables or pin plugs up to 4 mm ²	Screw+clamp	7444 000 414	7451 000 414	7441 000 414
	Volume control (Poti, passive) (cinch L/R), (full size plate) for line signals, e. g. of notebooks, DVD players Required installation depth: 35 mm	Cable+plug	7444 000 518	7451 000 518	7441 000 518
	Audio 2 x cinch/1 x jack (3.5 mm stereo) (full size plate) with volume control/Poti, passive Symmetric output for line signals, e. g. of DVD players	Clamp	7444 000 418		7441 000 418
	Audio 2 x cinch/1 x jack (3.5 mm stereo) (full size plate) Symmetric output for line signals, e. g. of DVD players	Clamp	7444 000 426		7441 000 426
	Audio 1 x XLR socket (f) (full size plate) with volume control/Poti, passive Symmetric output	Clamp	7444 000 419		7441 000 419

Konnnect alu / steel - Combinations/Data

Adapter plates sized			50 x 50 mm	50 x 50 mm	54 x 54 mm
Illustration	Model	Connection	Aluminium	Stainless steel	Aluminium
	HDMI, VGA, audio jack (3.5 mm stereo) (full size plate) Required installation depth: 52 mm	Cable+plug	7444 000 586		7441 000 586
	HDMI, audio jack (3.5 mm stereo) Required installation depth: 52 mm	Cable+plug	7444 000 589		7441 000 589
	Cat-6, audio jack (3.5 mm stereo) Required installation depth: 47 mm	Cable+plug	7444 000 532		7441 000 532
	Video, audio L/R Required installation depth: 47 mm	Soldering Cable+plug	7444 000 430 7444 000 530	7451 000 430 7451 000 530	7441 000 430 7441 000 530
	S-video, audio L/R Required installation depth: 47 mm	Soldering Cable+plug	7444 000 431 7444 000 531		7441 000 431 7441 000 531
	Video, audio jack (3.5 mm stereo) Required installation depth: 47 mm	Cable+plug	7444 000 599		7441 000 599
	Serial RS232 (9-pin SubD)	Soldering Cable+plug	7444 000 420 7444 000 520	7451 000 420	7441 000 420 7441 000 520
	PS/2	Cable+plug	7444 000 521		7441 000 521
	USB 2.0 A-socket (f)/ A-socket (f) Required installation depth: 43 mm	Cable+plug	7444 000 522	7451 000 522	7441 000 522
	USB 2.0 B-socket (f)/ B-plug (m) Required installation depth: 43 mm	Cable+plug 1 m	7444 000 829		

Konnect alu / steel - Data/Network

Adapter plates sized			50 x 50 mm	50 x 50 mm	54 x 54 mm
Illustration	Model	Connection	Aluminium	Stainless steel	Aluminium
	USB 2.0 B-socket (f)/A-socket (f) Required installation depth: 43 mm	Cable+plug	7444 000 525	7451 000 525	7441 000 525
	USB active hub B-socket (f)/A-socket (f) with integrated repeater for max. 5 m cable length Required installation depth: 43 mm	Cable+plug	7444 000 528		7441 000 528
	USB - Cat-5 with integrated USB extender (5772 000 001) for USB 1.1, max. length CAT 5 cable between sender/receiver 45 m	Cable+plug	7444 000 524		7441 000 524
	Cat-5 (RJ45)	Gender changer (1:1)	7444 000 523	7451 000 523	7441 000 523
	Cat-6/6A (RJ45) suitable for Outer diameter of cable 5 - 9 mm Diameter of conductor AWG 26/7 up to AWG 22/1, diameter of wire 1.0 - 1.6 mm	Cut+clamp	7444 000 423	7451 000 423	7441 000 423
	Cat-6 (RJ45)	Gender changer (1:1)	7444 000 526	7451 000 526	7441 000 526
	Cat-6 (RJ45)	Cable+plug	7444 000 527	7451 000 527	7441 000 527
	Cat-6(A) (RJ45) Flexible cable outlet for limited installation space Required installation depth: 26 mm suitable for outer diameter of cable 6 - 10 mm for solid conductor AWG 24 - 22 and flexible conductor AWG 26 - 24	Cut+clamp	7444 000 425	7451 000 425	7441 000 425
	Cat-7 Socket (f) from „Nexans“ Certified up to 1000 MHz downward compatible with RJ45 (Cat-5/Cat-6) suitable for AWG 24 - 22	Cut+clamp	7444 000 424	7451 000 424	7441 000 424

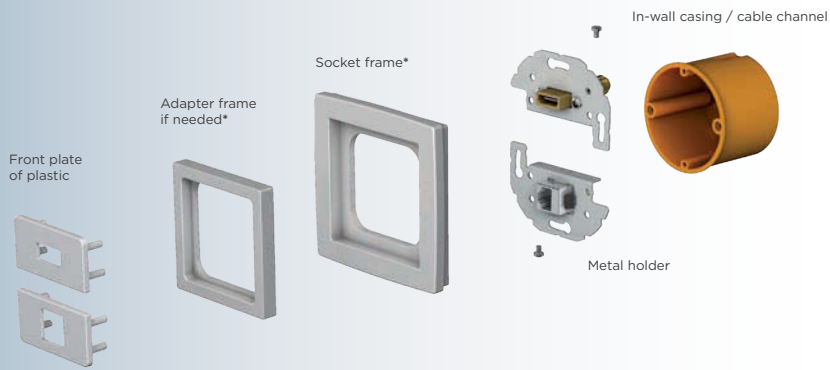

Media technology perfectly integrated

- Modern and attractive design
- No visible screws on the front plate, for a visually perfect integration
- Front plate of white plastic (RAL 9010)
- High flexibility due to an individual combination of half-size plates, to be configured according to customer's wishes
- Simplified mounting
- Compatible with the latest socket systems of all manufacturers



Front plates in three sizes are included in the package

Suitable for socket systems with inner dimensions of 50x50 mm, 54x54 mm und 55x55 mm



Metal holder

with communication interfaces, no extra mounting frame needed

Konnect design - HDMI/DVI/DisplayPort/VGA

Illustration	Model	Connection	Ref. No.
	Faceplate (half size) Faceplate (full size)		7454 000 400 7454 000 500
	HDMI - Highspeed with Ethernet Required installation depth for cable+plug connection: 52 mm clamp connection: 42 mm	Cable+plug Clamp	7454 000 542 7454 000 740
	HDMI - Highspeed with Ethernet, 90° version Required installation depth: 25 mm	Cable+plug	7454 000 582
	HDMI to DVI-D Required installation depth: 52 mm	Cable+plug	7454 000 581
	DVI-D to HDMI Required installation depth: 65 mm	Cable+plug	7454 000 580
	DVI-I (24 + 5-pin) Required installation depth for cable+plug connection: 65 mm	Soldering Cable+plug	7454 000 402 7454 000 502
	DisplayPort Required installation depth: 55 mm	Cable+plug	7454 000 588
	HDMI to 19-pin DIN plug Required installation depth: 67 mm	Cable+plug	7454 000 561
	DVI-D to 19-pin DIN plug Required installation depth: 67 mm	Cable+plug	7454 000 560
	VGA (HD15) Required installation depth for cable+plug connection: 47 mm clamp connection: 42 mm	Soldering Cable+plug Gender changer Clamp	7454 000 401 7454 000 501 7454 000 601 7454 000 701
	VGA (HD15) to BNC5 Required installation depth: 47 mm	Cable+plug	7454 000 507


Konnect design - VGA/Video

Illustration	Model	Connection	Ref. No.
	VGA (HD15 fully configured) to 13-pin DIN plug Required installation depth: 67 mm	Cable+plug	7454 000 552
	VGA (HD15), video (cinch), audio (3.5 mm jack) to 13-pin DIN plug Required installation depth: 54 mm	Cable+plug	7454 000 551
	VGA (HD15), video (cinch), s-video to 13-pin DIN plug Required installation depth: 54 mm	Cable+plug	7454 000 550
	Video (cinch) Required installation depth for cable+plug connection: 47 mm	Soldering Cable+plug	7454 000 403 7454 000 503
	Video (cinch) to 1 x BNC Required installation depth: 47 mm	Cable+plug	7454 000 535
	S-video (4-pin MiniDIN) Required installation depth for cable+plug connection: 47 mm	Soldering Cable+plug	7454 000 404 7454 000 504
	S-video (4-pin MiniDIN) to 2 x BNC Required installation depth: 47 mm	Cable+plug	7454 000 036
	Video / s-video (cinch / 4-pin MiniDIN) Required installation depth for cable+plug connection: 47 mm	Soldering Cable+plug	7454 000 405 7454 000 505
	Components-video (3 x cinch) Required installation depth for cable+plug connection: 47 mm	Soldering Cable+plug	7454 000 406 7454 000 506
	1 x BNC (e. g. composite video, SDI)	Gender changer	7454 000 537
	2 x video (e. g. s-video)	Gender changer	7454 000 538





Konnect design - Audio/Data

Illustration	Model	Connection	Ref. No.
	Audio L / R (cinch) Required installation depth for cable+plug connection: 47 mm	Soldering Cable+plug	7454 000 410 7454 000 510
	Audio jack (3.5 mm stereo) Required installation depth for cable+plug connection: 47 mm	Soldering Cable+plug	7454 000 411 7454 000 511
	Audio jack (6.3 mm stereo)	Soldering	7454 000 417
	XLR 3-pin (full size plate) Neutrik® socket (f)	Soldering (XLR socket - f) Soldering (XLR plug - m)	7454 000 412 7454 000 416
	Speakon 4-pin (full size plate) Neutrik® socket (f) Required installation depth: 40 mm (with soldering)	Soldering	7454 000 413
	Loudspeaker Suitable for loudspeaker cables or pin plugs up to 4 mm ²	Screw+clamp	7454 000 414
	Volume control (Poti, passive) (full size plate) 2 x cinch (L/R) for line signals, e. g. of notebooks, DVD players Required installation depth: 47 mm	Cable+plug	7454 000 518
	Video, audio L / R (3 x cinch) Required installation depth for cable+plug connection: 47 mm	Soldering Cable+plug	7454 000 430 7454 000 530

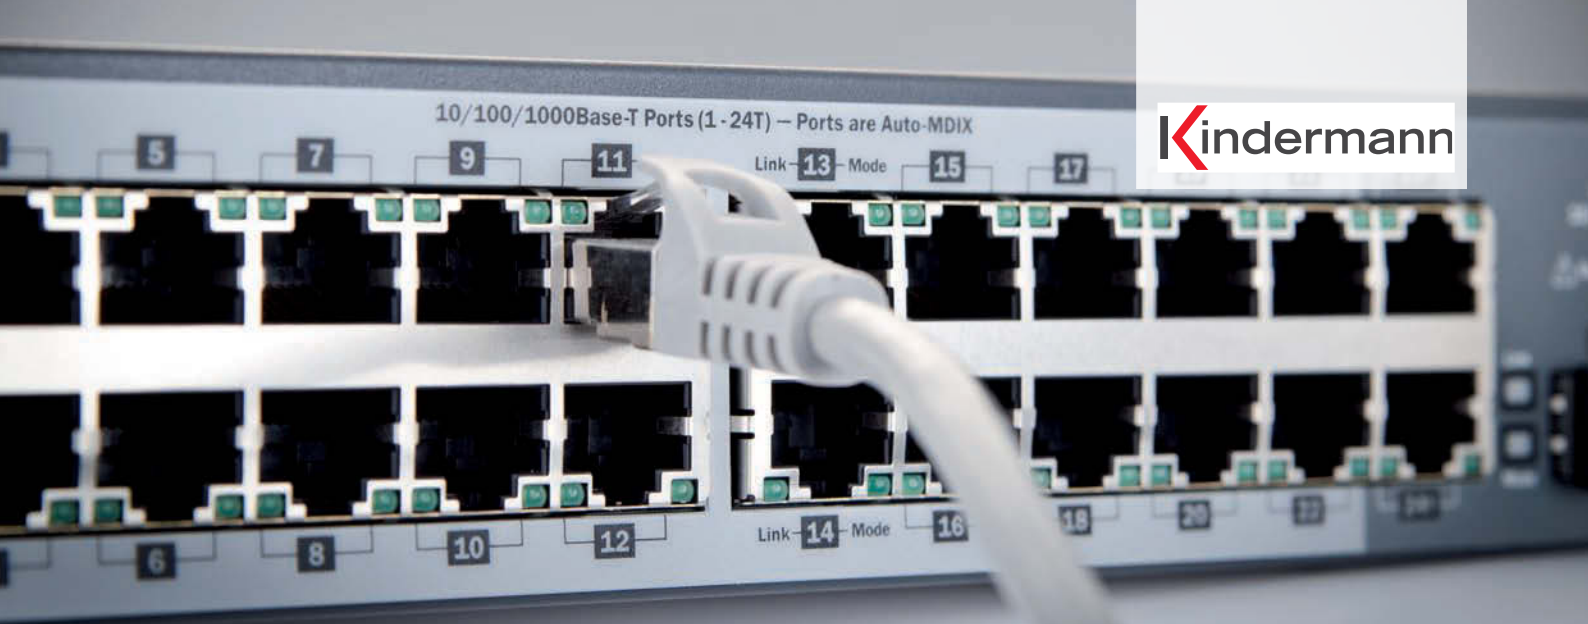

Konnect design - Data/Network

Illustration	Model	Connection	Ref. No.
	Serial/RS232 (9-Pin SubD)	Soldering Cable+plug	7454 000 420 7454 000 520
	USB 2.0 (A/A) Required installation depth for cable+plug connection: 43 mm	Cable+plug	7454 000 522
	USB 2.0 (B/A) Required installation depth for cable+plug connection: 43 mm	Cable+plug	7454 000 525
	USB - Cat-5 Extender (A/A) with integrated USB extender 5771 000 001 via Cat-5/6 cable max. cable length between sender and receiver: 45 m	Cable+plug	7454 000 524
	USB 2.0 active (B/A) with integrated repeater for max. 5 m cable length Required installation depth for cable+plug connection: 43 mm	Cable+plug	7454 000 528
	Cat-5 (RJ45)	Gender changer	7454 000 523
	Cat-6 (RJ45)	Cut+clamp Gender changer Cable+plug	7454 000 423 7454 000 526 7454 000 527
	Cat-7 (RJ45) Socket (f) "Nexans" Certified up to 1000 MHz downward-compatible to Cat-5/Cat-6	Cut+clamp	7454 000 424

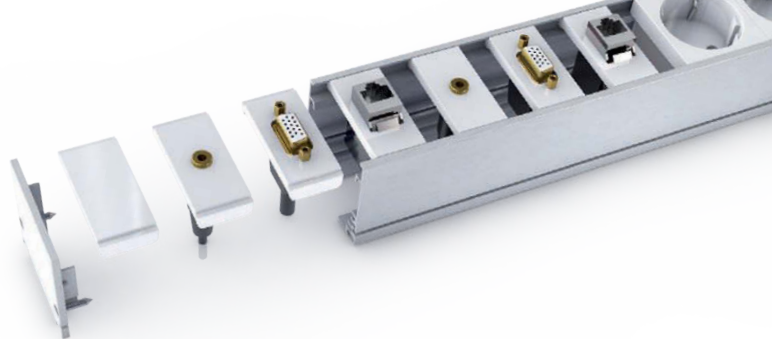

Konnect flex 45 - Miscellaneous/Digital

Illustration	Model	Connection	Ref. No.
	Faceplate (half size)		7449 000 400
	Faceplate (full size)		7449 000 500
	Push-button, stainless steel, 48 VDC / 125 mA	Screw connection	7449 000 441
	Adapter plate with button, stainless steel, 30 VDC / 500 mA	Euro plug	7449 000 442
	Push-button, stainless steel with blue LED light ring, 48 VDC / 500 mA	Euro plug	7449 000 443
	Light ring 9 - 12 VDC, (1x open / close)		
	Faceplate with cable outlet with metal reinforcement on the rear	Opening: 8 mm	7449 000 446
		Opening: 12 mm	7449 000 447
	Double switch e. g. for controlling screens etc. via low voltage relays		7449 000 448
	EnOcean Radio button with 1-fold / 2-fold switch		7449 000 449
	Media control Neets EcHo		7449 000 591
	Media control Neets SieRRa Needs the space of 4 half plates		7449 000 590
	HDMI - Highspeed with Ethernet	Cable+plug: short - socket (f)	7449 000 542
		Cable+plug: 1 m - plug (m)	7449 000 842
		Cable+plug: 3 m - plug (m)	7449 000 942
	HDMI to DVI-D	Cable+plug: short - socket (f)	7449 000 581
	DVI-I (24 + 5-pin)	Soldering	7449 000 402
		Cable+plug: short - socket (f)	7449 000 502
		Cable+plug: 3 m - plug (m)	7449 000 902
	DVI-D to HDMI	Cable+plug: short - socket (f)	7449 000 580
	DisplayPort	Cable+plug: short - socket (f)	7449 000 588
		Cable+plug: 3 m - plug (m)	7449 000 888
			7449 000 988

Konnect flex 45 - VGA/Video

Illustration	Model	Connection	Ref. No.
	HDMI to 19-pin DIN plug	Cable+plug: short - socket (f) Cable+plug: 3 m - plug (m)	7449 000 561 7449 000 961
	DVI to 19-pin DIN plug	Cable+plug: short - socket (f) Cable+plug: 3 m - plug (m)	7449 000 560 7449 000 960
	VGA (HD15)	Soldering Clamp Gender changer Cable+plug: short - socket (f) Cable+plug: 1 m - plug (m) Cable+plug: 3 m - plug (m)	7449 000 401 7449 000 701 7449 000 601 7449 000 501 7449 000 801 7449 000 901
	VGA (HD15) to BNC5	Cable+plug: short - socket (f)	7449 000 507
	VGA active (full size plate) with integrated VGA amplifier 1:1 400 MHZ with external power supply	Cable+plug: short - socket (f)	7449 000 509
	VGA / audio / push-button (full size plate) Adapter plate with illuminated stainless steel button, perfect solution for switch with StepIn technology, e. g. 5816 000 001 VGA audio Share Pro 8 to 1 (requires fully configured VGA cables e. g. 7483 000 2xx) to transmit the change-over command	Cable+plug: short - socket (f)	7449 000 585
	VGA (HD15 fully configured) to 13-pin DIN plug	Cable+plug: short - socket (f) Cable+plug: 3 m - plug (m)	7449 000 552 7449 000 952
	VGA (HD15), video (cinch), audio (3.5 mm jack) to 13-pin DIN plug	Cable+plug: short - socket (f) Cable+plug: 3 m - plug (m)	7449 000 551 7449 000 951
	VGA (HD15), video (cinch), s-video to 13-pin DIN plug	Cable+plug: short - socket (f) Cable+plug: 3 m - plug (m)	7449 000 550 7449 000 950
	Video (cinch) Required installation depth for cable+plug connection: 47 mm	Cable+plug: short - socket (f) Cable+plug: 3 m - plug (m)	7449 000 503 7449 000 903
	S-video (4-pin MiniDIN) Required installation depth for cable+plug connection: 47 mm	Cable+plug: short - socket (f) Cable+plug: 3 m - plug (m)	7449 000 504 7449 000 904

Konnect flex - Video/Audio

Illustration	Model	Connection	Ref. No.
	Video/s-video (cinch/4-pin MiniDIN) Required installation depth for cable+plug connection: 47 mm	Cable+plug: short - socket (f) Cable+plug: 3 m - plug (m)	7449 000 505 7449 000 905
	Component video (3 x cinch) Required installation depth for cable+plug connection: 47 mm	Cable+plug: short - socket (f)	7449 000 506
	Video/audio L/R (3 x cinch) Required installation depth for cable+plug connection: 47 mm	Cable+plug: short - socket (f) Cable+plug: 3 m - plug (m)	7449 000 530 7449 000 930
	S-Video/audio (4-pin MiniDIN/2 x cinch) Required installation depth for cable+plug connection: 47 mm	Cable+plug: short - socket (f) Cable+plug: 3 m - plug (m)	7449 000 531 7449 000 931
	Audio L/R (cinch) Required installation depth for cable+plug connection: 47 mm	Soldering Cable+plug: short - socket (f) Cable+plug: 3 m - plug (m)	7449 000 410 7449 000 510 7449 000 910
	Audio jack (3.5 mm stereo) Required installation depth for cable+plug connection: 47 mm	Soldering Cable+plug: short - socket (f) Cable+plug: 1 m - plug (m) Cable+plug: 3 m - plug (m)	7449 000 411 7449 000 511 7449 000 811 7449 000 911
	XLR 3-pin (full size plate) Neutrik® socket (f)	Soldering (XLR-socket - f) Soldering (XLR-plug - m)	7449 000 412 7449 000 416
	Volume control (Poti, passive), (cinch L/R) (full size plate) for line signals, e. g. of notebooks, DVD players Required installation depth for cable+plug connection: 35 mm	Cable+plug: short - socket (f)	7449 000 518

Konnect flex - Data / Network

Illustration	Model	Connection	Ref. No.
	Serial RS232 (9-pin SubD)	Soldering Cable+plug: short - socket (f)	7449 000 420 7449 000 520
	USB 2.0 A-socket (f)/A-socket (f) Required installation depth for cable+plug connection: 43 mm	Cable+plug: short - socket (f) Cable+plug: 3 m - plug (m)	7449 000 522 7449 000 922
	USB 2.0 B-socket (f)/A-socket (f) Required installation depth for cable+plug connection: 43 mm	Cable+plug: short - socket (f) Cable+plug: 3 m - plug (m)	7449 000 525 7449 000 925
	USB active hub B-socket (f)/A-socket (f) with integrated repeater for max. 5 m cable length Required installation depth for cable+plug connection: 43 mm	Cable+plug: short - socket (f)	7449 000 528
	USB 2.0 B-socket (f)/B-socket (f) Required installation depth for cable+plug connection: 43 mm	Cable+plug: 1 m - plug (m)	7449 000 829
	Cat-5 (RJ45)	Gender changer (1:1)	7449 000 523
	Cat-6 (RJ45) Required installation depth for cable+plug connection: 47 mm	Cut+clamp Gender changer (1:1) Cable+plug: short - socket (f) Cable+plug: 3 m - plug (m)	7449 000 423 7449 000 526 7449 000 527 7449 000 927
	Cat-7 (socket (f) of "Nexans") Certified up to 1000 MHz, downward compatible to RJ45 (Cat-5/Cat-6)	Cut+clamp	7449 000 424
	Cat-6/audio jack (3.5 mm stereo) Required installation depth for cable+plug connection: 47 mm	Cable+plug: short - socket (f) Cable+plug: 3 m - plug (m)	7449 000 587 7449 000 987

Mounting material for socket systems

Illustration	Model	Connection	Ref. No.
	Mounting frame for adapter plates (7441 / 7444 / 7451 000 xxx)	with plastic adapter frame for adapter plates 54 x 54 mm (7441 000 xxx) and socket covers with inner dimensions 55 x 55 mm	7442 000 001
	Socket cover 1-gang incl. mounting frame	Jung AS500, white, suitable for adapter plates 54 x 54 mm (7441 000 xxx)	7441 000 021
	Socket cover 2-gang incl. mounting frame	Jung AS500, white, suitable for adapter plates 54 x 54 mm (7441 000 xxx)	7441 000 022
	Socket cover 1-gang incl. mounting frame	Busch Jaeger, Reflex SI, white, suitable for adapter plates 54 x 54 mm (7441 000 xxx)	7441 000 001
	Socket cover 2-gang incl. mounting frame	Busch Jaeger, Reflex SI, white, suitable for adapter plates 54 x 54 mm (7441 000 xxx)	7441 000 002
	Safety mains socket for Schuko plug	Busch Jaeger, Reflex SI, white	7441 000 010
	On-wall casing (1- gang)	Busch Jaeger, Reflex SI, white, incl. pre-cut cable outlet, suitable for 7441 000 001	7441 000 003
	On-wall casing (2 -gang)	Busch Jaeger, Reflex SI, white, incl. pre-cut cable outlet, suitable for 7441 000 002	7441 000 004
	In-wall casing (1- gang)	1-gang – depth: 47 mm 1-gang – depth: 61 mm	7441 000 005 7441 000 007
	In-wall casing (2 -gang)	2-gang – depth: 47 mm 2-gang – depth: 75 mm	7441 000 006 7441 000 008

Module holder for floor boxes

- For OBO/Ackermann, Tehalit and Electraplan floor boxes
- The module holders replace the casings GB2 and GB3 or GBV3 and GBV4
- For older floor boxes of Electraplan the casings GB2D or GBV2T or GBV3T in connection with 7445 000 004 are required
- NEW: Modular system 8 - for limited installation depth
- For individual combination of adapter plates
- Adapter plates optional

Installation example
for module holder 8
(7445 000 005/06)



Module holders for floor boxes

Illustration	Model	Specification	Ref. No.
	Module holder GB2 for OBO/Ackermann, Hager, Electraplan and Tehalit	For 4 half size adapter plates or 2 full size adapter plates 7444 / 7451 000 xxx	7445 000 007
	Module holder GB3 for OBO/Ackermann, Hager, Electraplan and Tehalit	For 6 half size adapter plates or 3 full size adapter plates 7444 / 7451 000 xxx	7445 000 008
	Module holder for Electraplan	For 2 half size adapter plates or 1 full size adapter plate 7444 / 7451 000 xxx Up to 2 holders are required for GB2D or GBV2T, up to 3 holders are required for GB3D or GBV3T	7445 000 004
	Module holder 8 for OBO/Ackermann and Hager/Tehalit	For 8 half size adapter plates or 4 full size adapter plates 7444 / 7451 000 xxx 17° inclined cable outlet for installation with floor boxes in floor constructions of 70 mm and higher, needs the space of two module casings	7445 000 005
	Module holder 8 for Hager/Electraplan	For 8 half size adapter plates or 4 full size adapter plates 7444 / 7451 000 xxx 17° inclined cable outlet for installation with floor boxes in floor constructions of 70 mm and higher, needs the space of two module casings	7445 000 006
	Module holder 6 (GBV3) for Hager/Electraplan V-series	For 6 half size adapter plates or 3 full size adapter plates 7444 / 7451 000 xxx 17° inclined cable outlet for installation with floor boxes in floor constructions of 70 mm and higher, needs the space of two module casings	7445 000 009
	Module holder 8 (GBV4) for Hager/Electraplan V-series	For 8 half size adapter plates or 4 full size adapter plates 7444 / 7451 000 xxx 17° inclined cable outlet for installation with floor boxes in floor constructions of 70 mm and higher, needs the space of two module casings	7445 000 010



The modular solution for 19" rack panels

- Available in 2 versions:
as patch panel with mains connection and switch or
as patch panel for adapter plates
- Integration of MultiMedia interfaces in 19" racks
- For individual combination of adapter plates
- Colour: silver, powder-coated RAL 9006

Illustration	Model	Specification	Ref. No.
	19" patch panel „Power“ with 2 x 230 V socket, mains switch and rear Schuko connection	For connecting multiple sockets etc. With additional space for 4 full size or 8 half size plates 7444 / 7451 000 xxx (50 x 50 mm), 2HE	7446 000 011
	19" patch panel	With additional space for 4 full size or 8 half size plates 7444 / 7451 000 xxx (50 x 50 mm), 2HE	7446 000 002

Illustration	Model	Specification	Ref. No.
	Connection cable Schuko plug (m) to GST 18 socket (f)	1 m 2 m 3 m 5 m 8 m	7444 000 301 7444 000 302 7444 000 303 7444 000 305 7444 000 308
	GST 18 extension socket (f) / plug m)	1 m 2 m 3 m	7444 000 321 7444 000 322 7444 000 323
	GST 18 distributor with clamp	1 input (plug -m), 3 outputs (socket - f)	7444 000 340
	Schuko connection to GST 18 plug m	0.5 m	7444 000 341

Power supply and connections
for CablePort flex, standard, basic

DISTRIBUIDOR EM PORTUGAL



R. Sá de Figueiredo 6 - C
2790-233 Carnaxide
Telef. (+351) 21 417 76 21 ♦ Fax. (+351) 21 030 00 31
Web: www.sislite.pt - email: geral.sislite@sislite.pt