



AXDN40ATDH

DINrail 4 Output, 1 Emergency
Lighting Control Module

Key Features



- Compact DIN rail design for installation in centralised panels or distributed enclosures.
- Software programmable (accommodates building tenant changes)
- Compatible with occupancy & absence sensing, daylight sensing and timed override for energy conservation and carbon reduction
- Four feed through terminal outputs software configurable to 0-10V, DSI or DALI (Broadcast)
- A single emergency output providing emergency lighting testing with optional feedback
- Multiple Scene Setting

Code Compliance



- Improves BREEAM & LEED scoring for building sustainability.
- Contributes to energy reduction targets under Climate Change Levy (CCL) and Carbon Reduction Commitment (CRC).
- Qualifies for Enhanced Capital Allowance (ECA) applications.
- Delivers lighting control requirements under UK Building Regs - L2a & L2b and BRE: 498.

Achievable Energy Savings

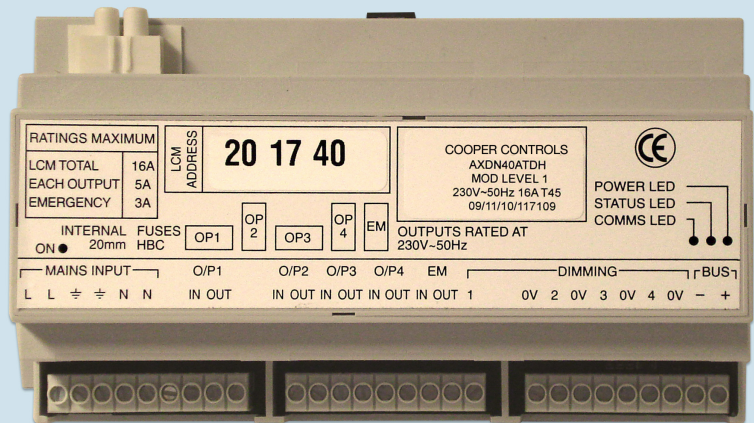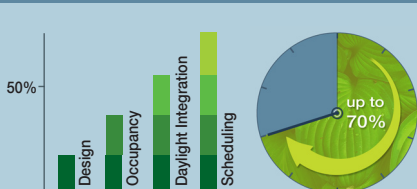

Overview

This DINrail mounting output module has 4 volt free (feed through) individually configurable and dimmable outputs for analogue and digital luminaires. In addition 1 volt free (feed through) output is provided for emergency lighting.

DINrail LCMs are ideal for use in areas where the electrical installation is fixed or where the use of centralised panels of controllers is appropriate. When used together with Greengate Area Controllers, the units create a flexible, networked, lighting control solution. Groups of luminaires and sensors or switches may be created and then controlled on the basis of occupancy, absence, daylight level or user override.

Each LCM is software upgradeable, no additional cards or equipment need be purchased.


This LCM may also be mounted in a steel enclosure (ordered separately) for mounting within a distributed LCM network.
Order Code: MTG22DN1

An additional 8 input DINrail mounting device is also available for expansion. Order Code: AXDN08SH

Suitable For

Cellular office
 Open plan office
 School classroom
 Lecture theatre
 Consulting room
 Meeting room
 Hospital wards
 Retail complex
 Public library
 Sports hall
 Airport terminal
 Factory production area
 Workshops
 Foyers & atriums
 Corridor & staircases
 Lift lobbies
 Plant room
 Storeroom

Dimensions

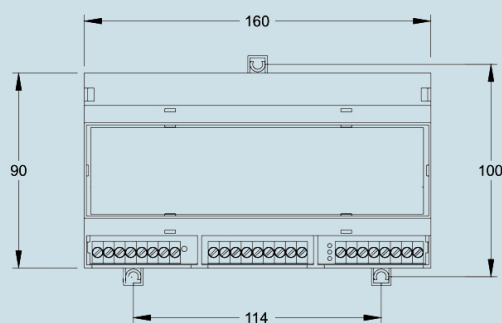

Additional Features

Reduced Inrush

Two second delay time between individual outputs at power-up

Program Port

For software upgrade or introduction of bespoke program

Outputs

Four outputs individually switchable, configurable and dimmable between 1-10V analogue or Digital dimming (LCM may be configured to digitally dim DSI or Broadcast-DALI luminaires)

Emergency Test

Options for mains failure simulation or emergency feedback (in conjunction with optical or current sensors). Tests may be zoned to the user's requirements and may be instigated from a PC, key switch or on a timed basis

Technical Information

Dimensions:

160 x 90 x 58mm (L: x W x H)*

Fixing:

35mm DINrail mounting or panel mount with 3 x 3.5mm diameter at centres 114 x 100mm (L x W)

Weight:

665g

Construction: Plastic housing UL94 V0 rated

Temperature: 0 to 45°C (non condensing)

Electronics Supply: 230V~AC 50Hz single phase

Controlled Feed Through Supplies:

4 x 5A + 3A - 16A total (single phase)

Max Load per LCM: 16A

Max Load per Output: 5A

Max Emergency Load: 3A

* This LCM may also be mounted in a steel enclosure (ordered separately) for mounting within a distributed LCM network. Order Code: MTG22DN1

Voltage



100V



230V NON CE



120V



277V



230V CE



347V



Standards



Greengate

20 Greenhill Crescent, Watford Business Park,
 Watford, Herts, WD18 8JA. UK
 T: +44 (0)1923 495495 F: +44 (0)1923 228796

E: info@greengatecontrols.co.uk www.greengatecontrols.co.uk

Distribuidor:

SISLITE

R. Sá de Figueiredo 6 - C
 2790-233 Carnaxide

Telef. 21 417 76 21 Fax. 21 030 00 31

Web: www.sislite.pt - email: geral.sislite@sislite.pt