

GXD2

In-Ground IP65 LED Luminaire

Key Features

- High quality solid machined aluminium body
- Suitable for indoor and outdoor use
- Easy to install
- Energy saving LED solution
- Choice of LED colour and beam angle

Lamp Colour Options

- CW** Cool White
- R** Red
- NW** Neutral White
- G** Green
- WW** Warm White
- RB** Royal Blue
- A** Amber

Bezel Colour Options

SS - Satin silver


Materials

- Body - 25 micron anodised aluminium
- Bezel - marine grade 316 stainless steel
- Fascia - UV stable cast resin

Lamp Options

- 1 x 1W LED


Beam Angles



Creative use of light can transform the feel and ambience of a space, highlight features, enhance a buildings decor or even provide guidance. The discreet GXD recessed LED luminaire allows subtle integration into floors, walls or ceilings so the light effect dominates visually, not the luminaire itself.

Available in a variety of LED colours and beam angles, the GXD provides the lighting designer with a wide palette of effects to choose from.

Dimensions

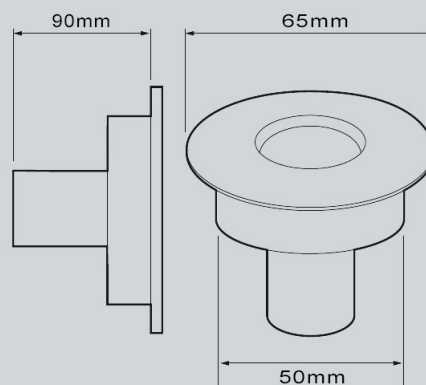


Cut out diameter: 54mm

Weight

- 1.1kg

Installation

- Suitable for indoor and outdoor use
- Spring clip retention on GXD2
- Also suitable for ceiling and wall mounting
- 300mm driver connection leads

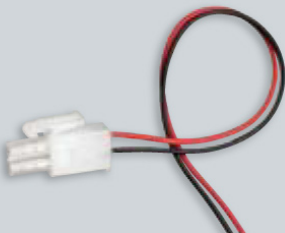

Power Input


- 350mA

Power Consumption


- 1W

Wiring Diagrams

Single fitting wired in series



Multiple fittings wired in series

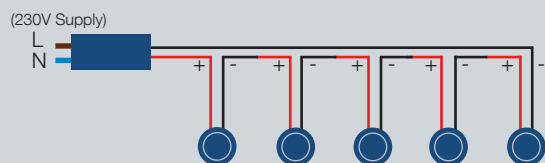

Recommended Drivers & Cables

- Driver/Colour change controller to be ordered separately
- Recommended fixed output driver, Cat No. LS-PD312. Operates up to twelve 1 x 1W luminaires
- For colour change options, use driver: LS-I-DRIVE

Ordering Codes

